

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

21/01/2014 00:00:00 - 22/01/2014 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-B satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 21/01/2014 00:00:00 - 22/01/2014 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 21/01/2014 00:00:00 - 22/01/2014 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	480	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	1212	1221	20140121032637.306	20140121032639.256
PX1 (130)	1227	1236	20140121032640.552	20140121032644.009
PX1 (130)	1237	1246	20140121032644.224	20140121032646.173
PX1 (130)	1252	1257	20140121032647.470	20140121032648.548
PX1 (130)	1259	1261	20140121032648.982	20140121032650.927
PX1 (130)	1261	1283	20140121032650.927	20140121032655.685
PX1 (130)	1286	1290	20140121032656.334	20140121032658.713
PX2 (135)	1212	1221	20140121032637.306	20140121032639.256
PX2 (135)	1227	1235	20140121032640.552	20140121032643.795
PX2 (135)	1237	1246	20140121032644.224	20140121032646.173
PX2 (135)	1252	1257	20140121032647.470	20140121032648.548
PX2 (135)	1259	1282	20140121032648.982	20140121032655.470
PX2 (135)	1286	1290	20140121032656.334	20140121032658.713
PX3 (140)	1212	1221	20140121032637.306	20140121032639.256
PX3 (140)	1227	1235	20140121032640.552	20140121032643.795
PX3 (140)	1237	1246	20140121032644.224	20140121032646.173
PX3 (140)	1252	1257	20140121032647.470	20140121032648.548
PX3 (140)	1259	1271	20140121032648.982	20140121032653.091

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
PX3 (140)	1271	1282	20140121032653.091	20140121032655.470
PX3 (140)	1286	1290	20140121032656.334	20140121032658.713
PX4 (145)	1212	1221	20140121032637.306	20140121032639.256
PX4 (145)	1227	1235	20140121032640.552	20140121032643.795
PX4 (145)	1237	1246	20140121032644.224	20140121032646.173
PX4 (145)	1252	1257	20140121032647.470	20140121032648.548
PX4 (145)	1259	1271	20140121032648.982	20140121032653.091
PX4 (145)	1271	1282	20140121032653.091	20140121032655.470
PX4 (145)	1286	1290	20140121032656.334	20140121032658.713
IMG (150)	1367	1376	20140121032637.091	20140121032639.037
IMG (150)	1382	1395	20140121032640.334	20140121032643.795
IMG (150)	1396	1406	20140121032644.009	20140121032646.173
IMG (150)	1411	1417	20140121032647.252	20140121032648.548
IMG (150)	1419	1424	20140121032648.982	20140121032650.713
IMG (150)	1424	1435	20140121032650.713	20140121032653.091
IMG (150)	1435	1446	20140121032653.091	20140121032655.470
IMG (150)	1450	1454	20140121032656.334	20140121032657.416
VER (160)	196	198	20140121032632.982	20140121032640.552
VER (160)	198	202	20140121032640.552	20140121032648.982
VER (160)	203	209	20140121032648.982	20140121032656.334
AUX (180)	38	41	20140121032633.416	20140121032657.416

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
21/01/2014 00:00:06	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.47 %	-
GQisFlagQual set (PX2)	99.58 %	-
GQisFlagQual set (PX3)	99.64 %	-
GQisFlagQual set (PX4)	99.57 %	-
GQisFlagQual set (all)	99.57 %	-

Table 4: Quality flags

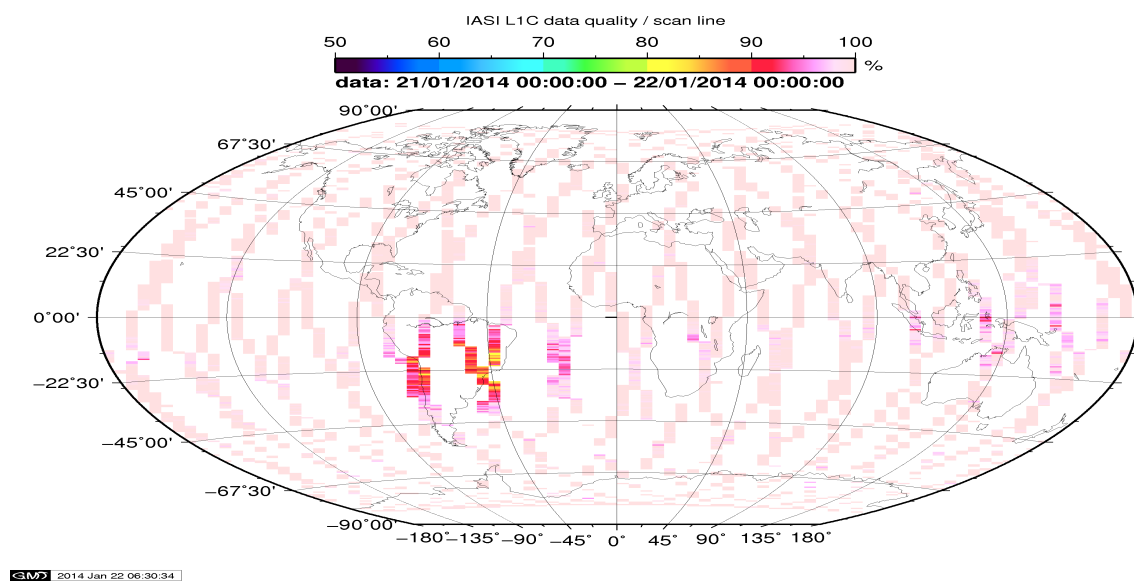


Figure 1: L1C data quality

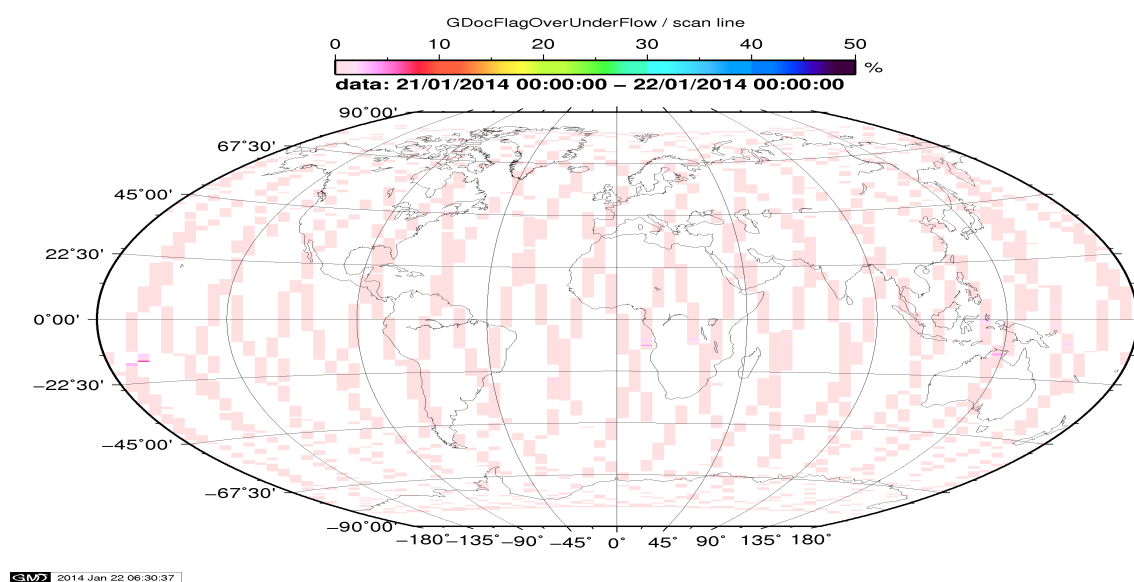


Figure 2: Flag of Over and Under Flows

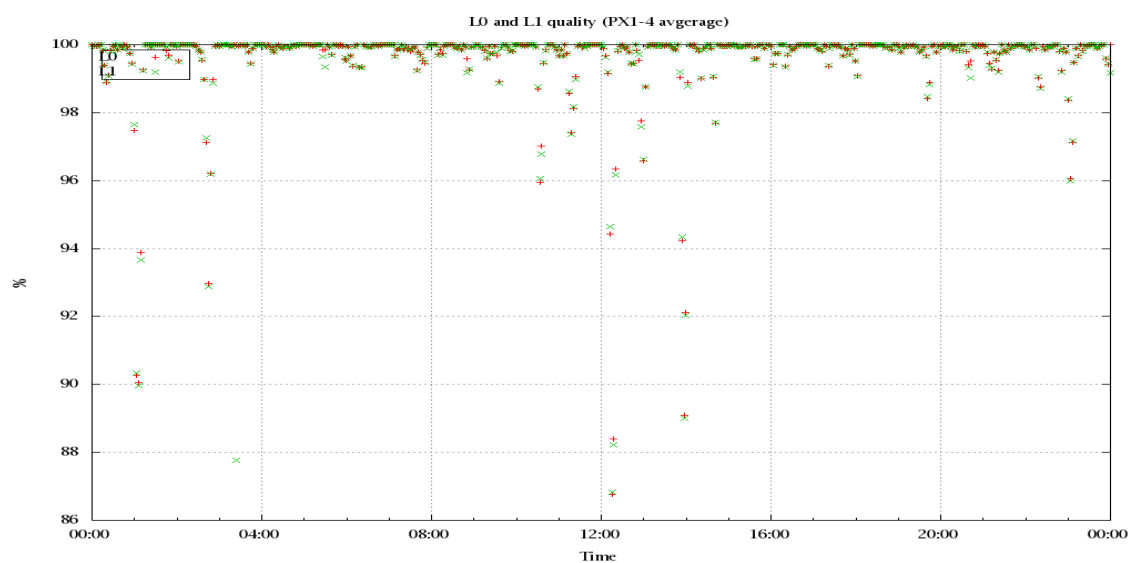


Figure 3: Level 0 and 1C overall quality

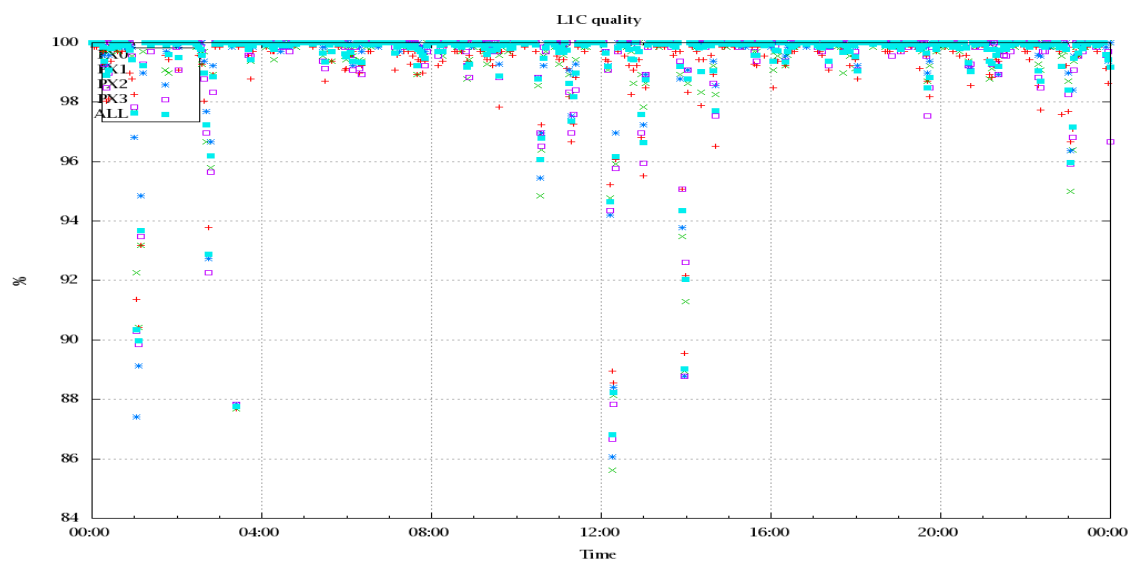


Figure 4: Level 1C quality

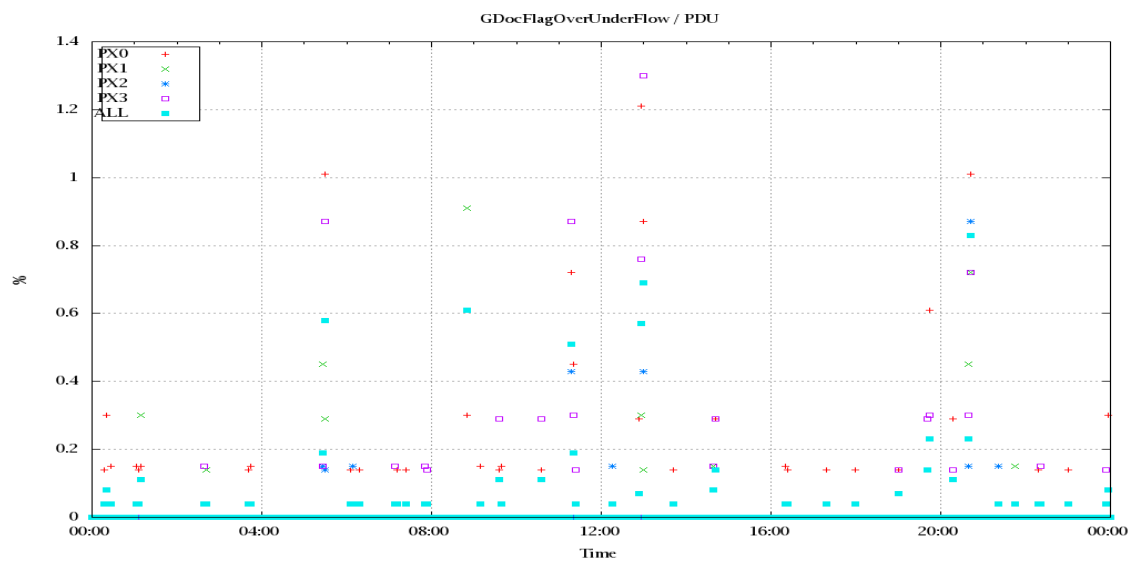


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

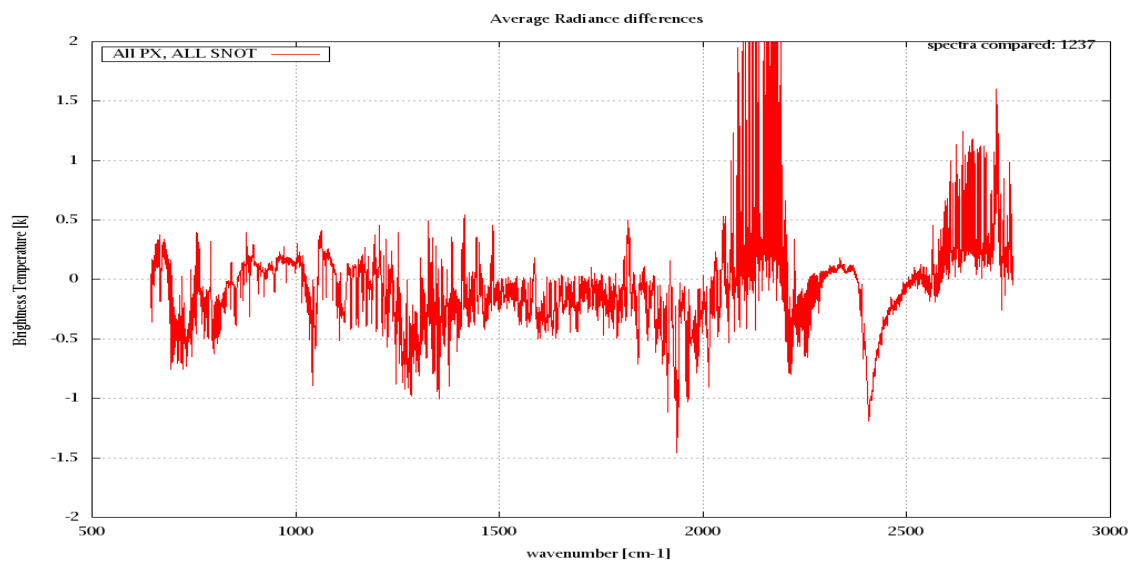


Figure 6: Average Radiance differences: OBS-CAL

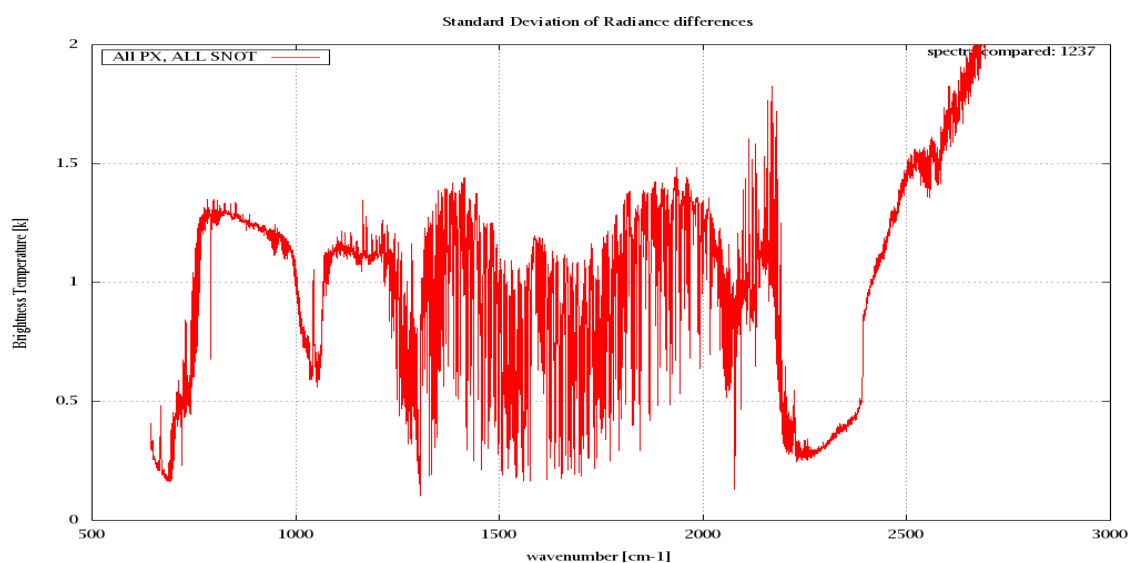


Figure 7: Standard Deviation of Radiance differences

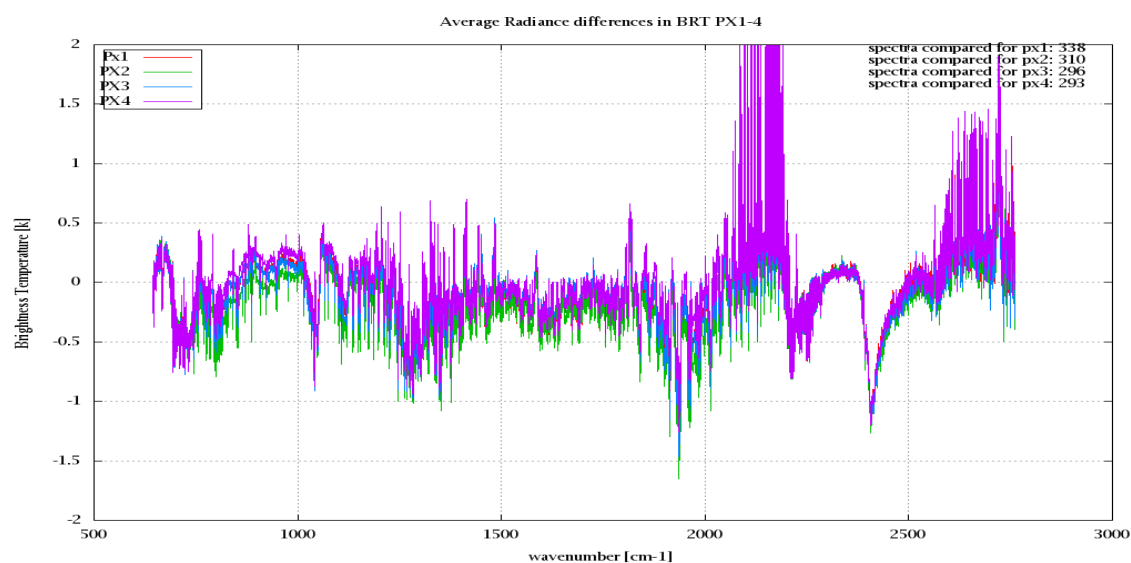


Figure 8: Average Radiance differences: OBS-CAL

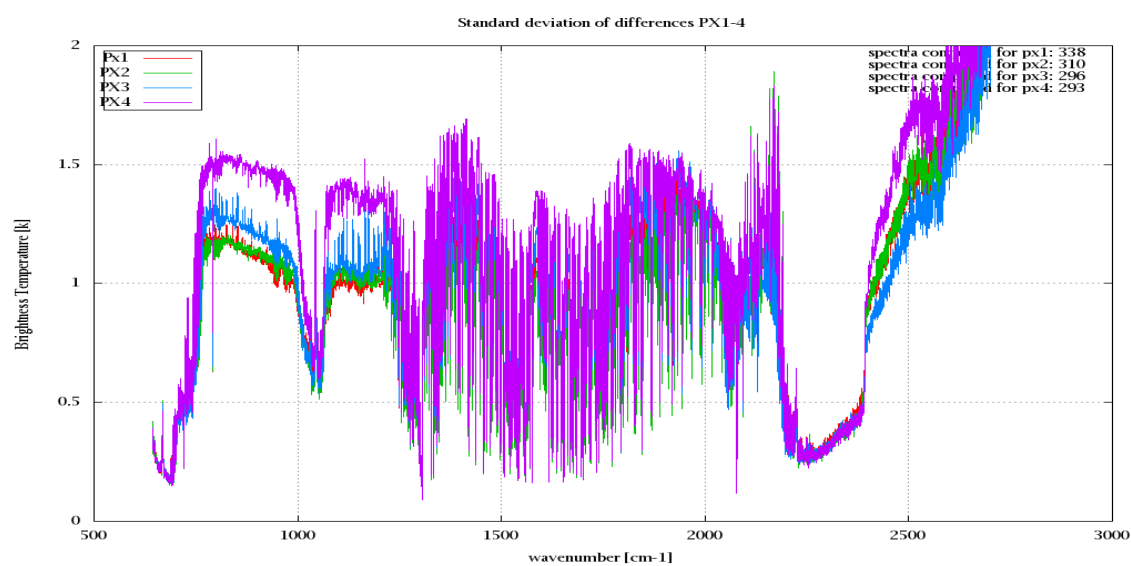


Figure 9: Standard Deviation of Radiance differences

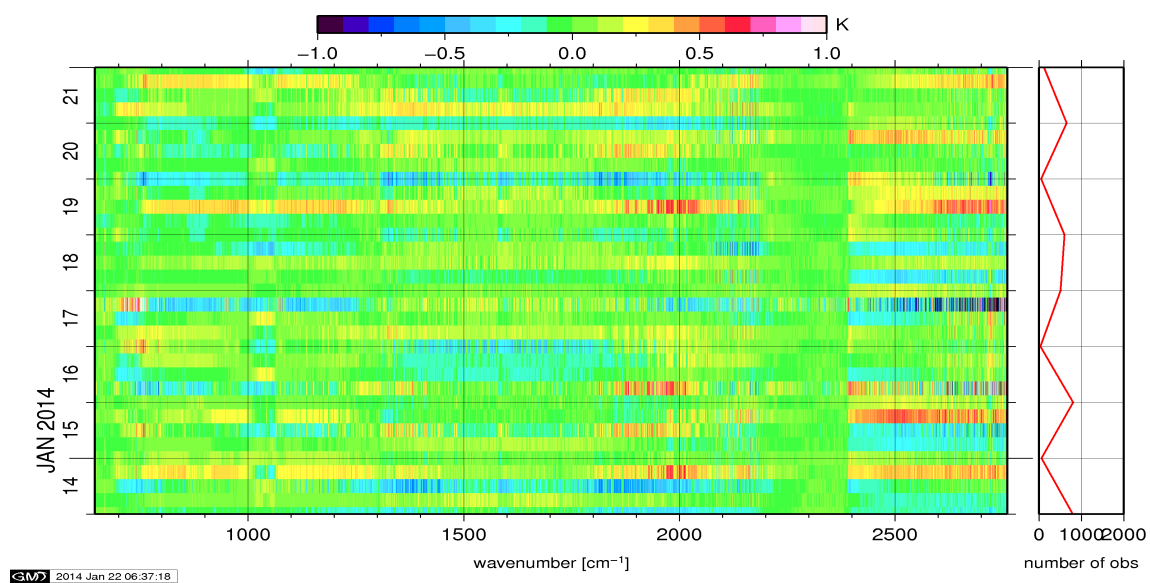


Figure 10: Radiance Anomaly in BRT: All Channels

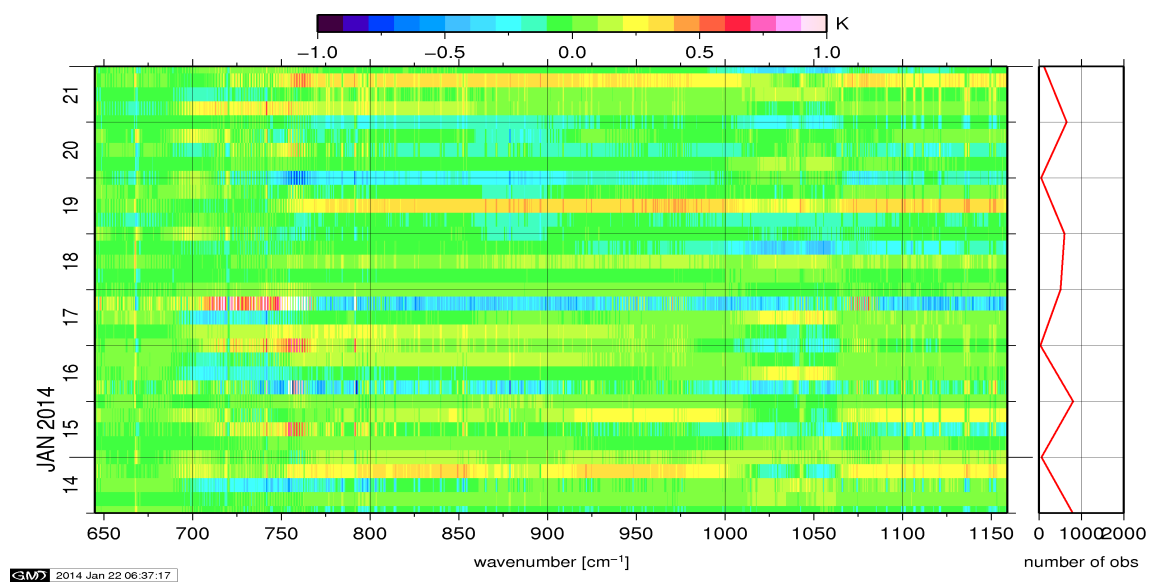


Figure 11: Radiance Anomaly in BRT: IASI Band 1

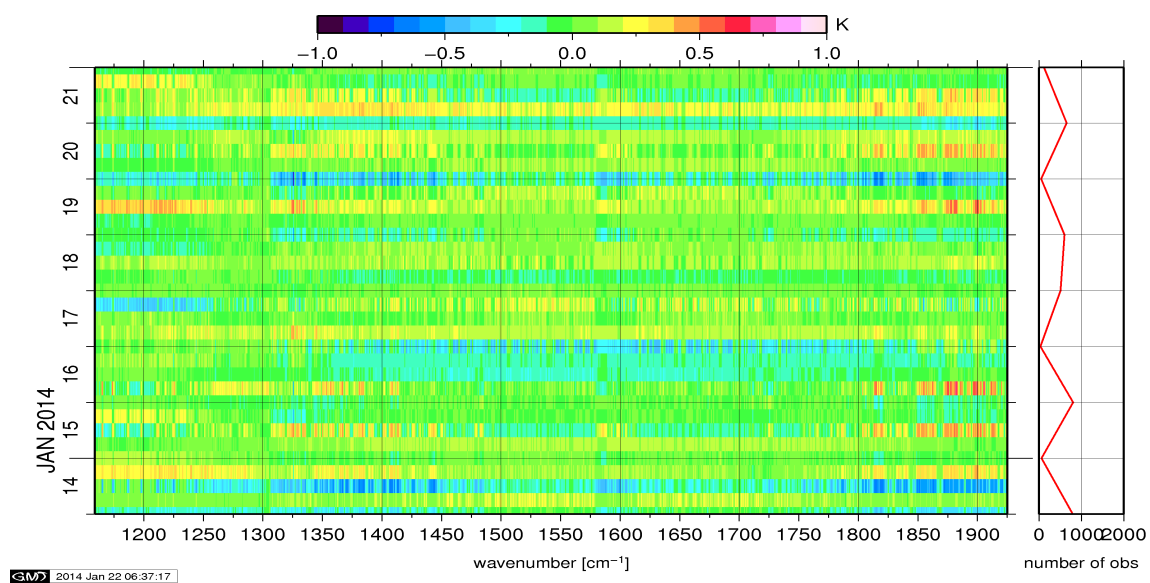


Figure 12: Radiance Anomaly in BRT: IASI Band 2

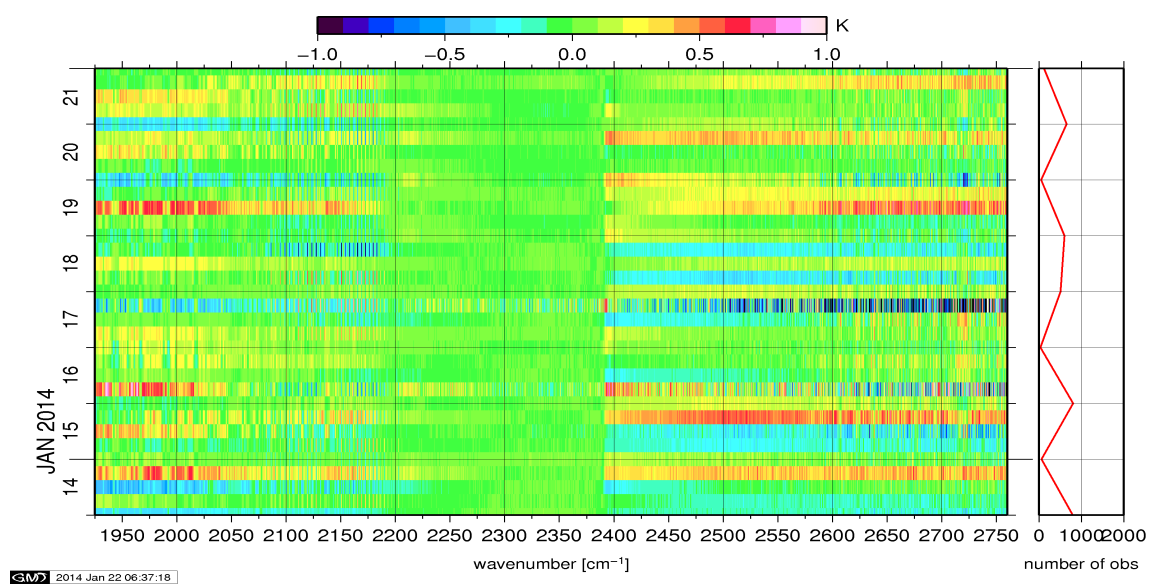


Figure 13: Radiance Anomaly in BRT: IASI Band 3

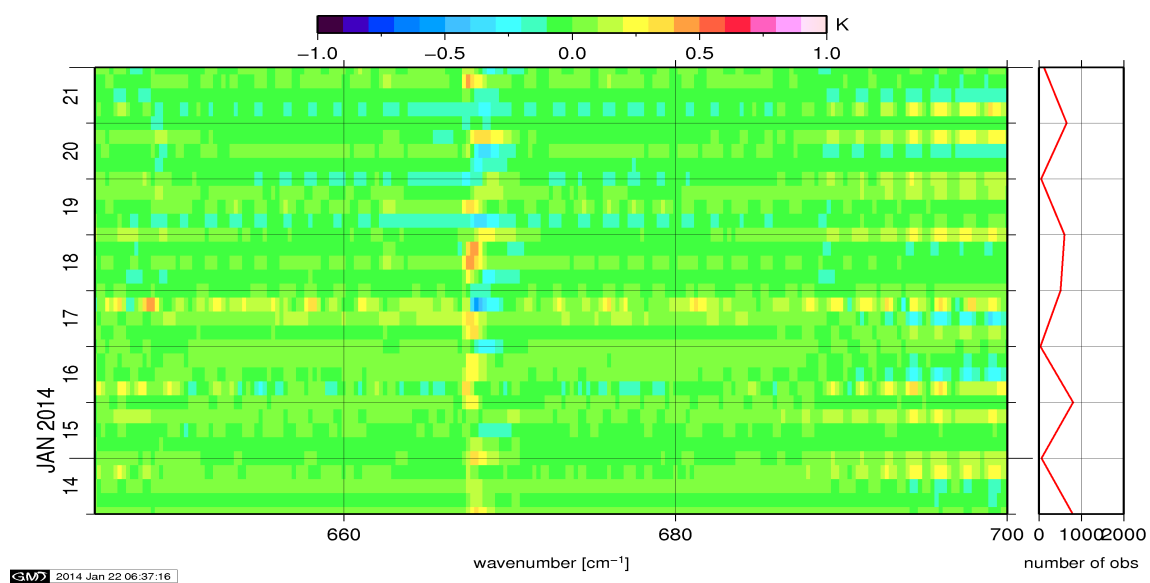


Figure 14: Radiance Anomaly in BRT: CO2 14

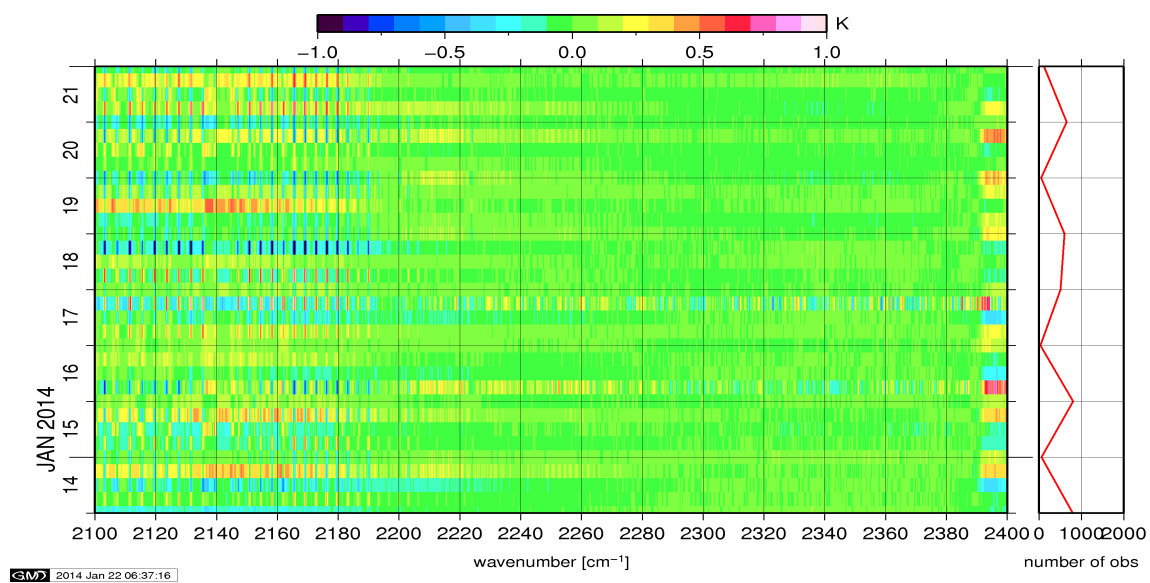


Figure 15: Radiance Anomaly in BRT: CO2 4.3

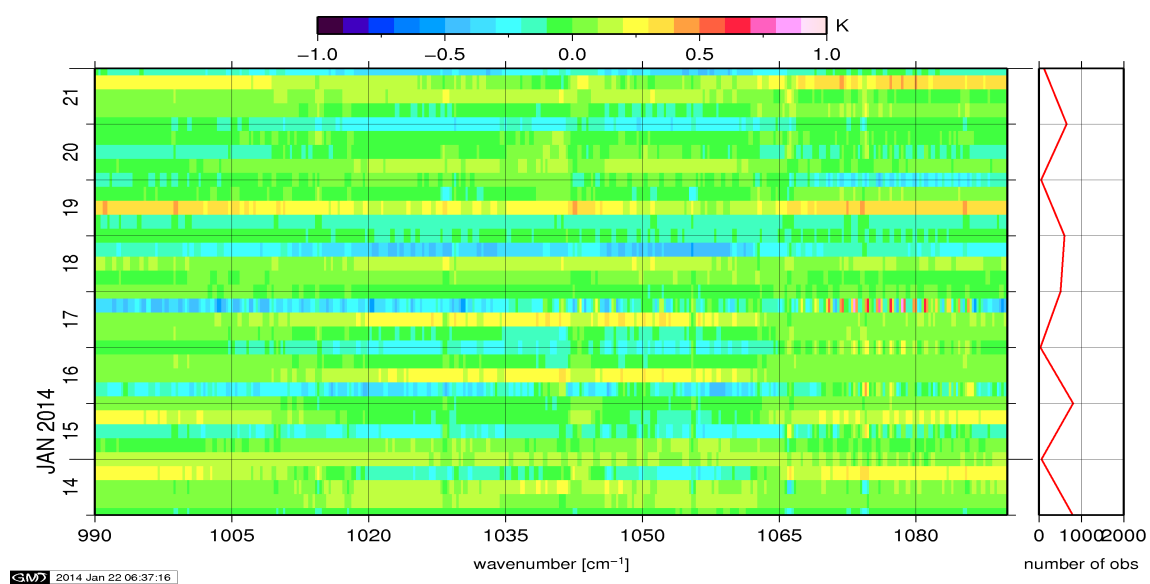


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

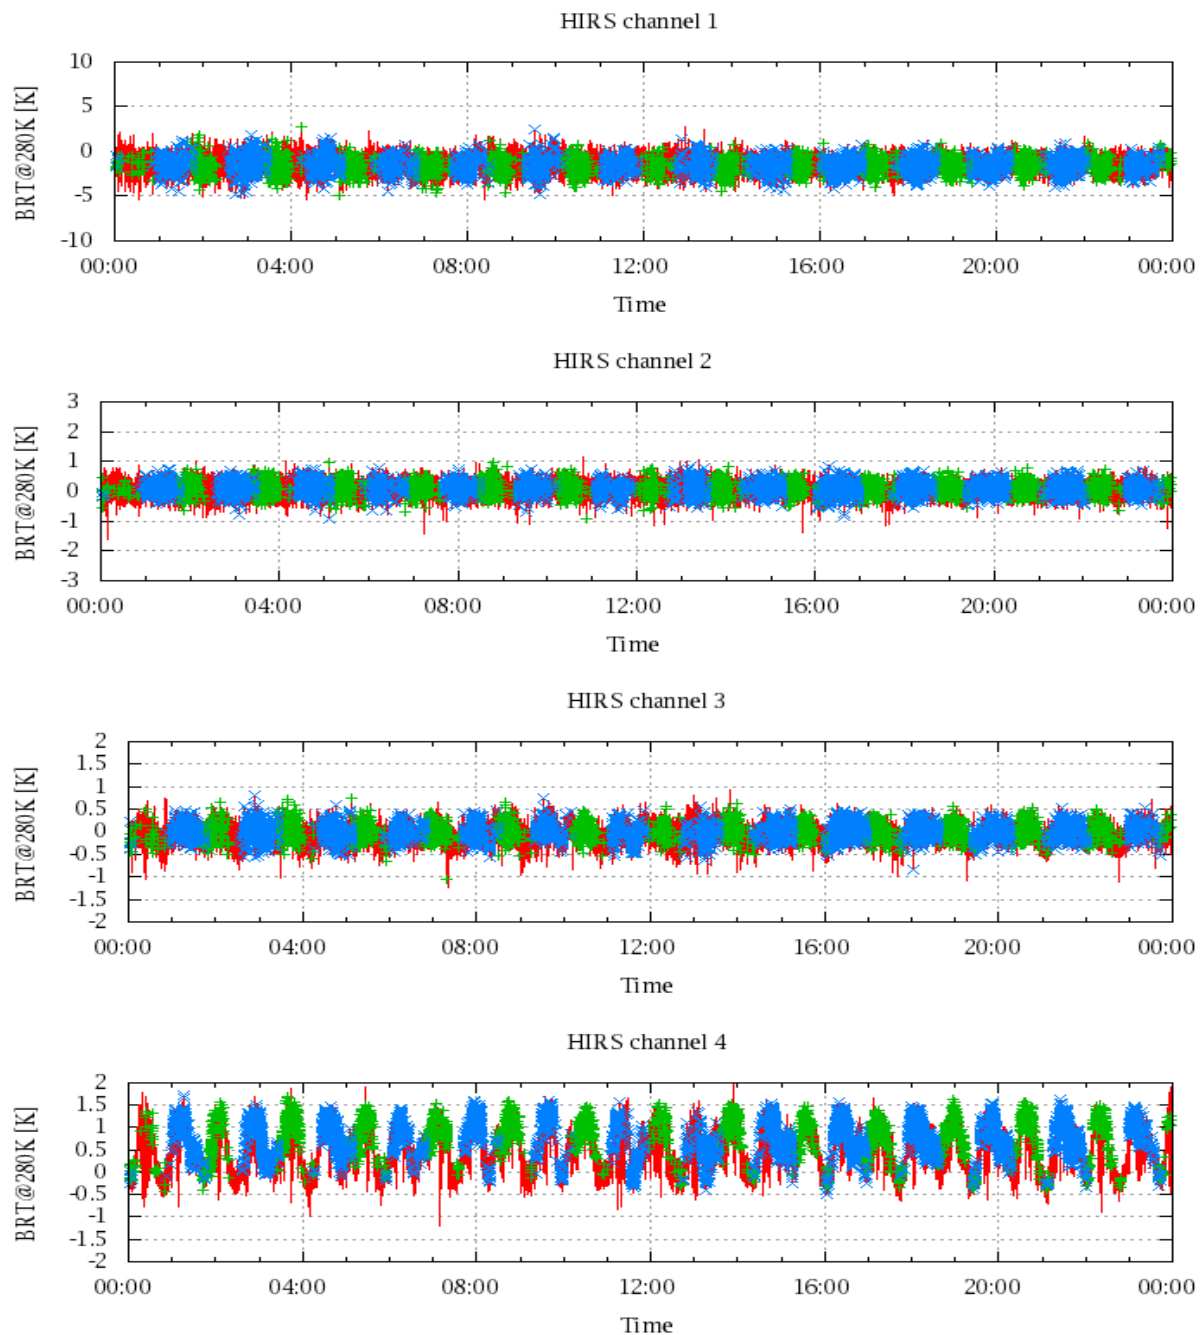


Figure 17: Radiance Differences in BRT

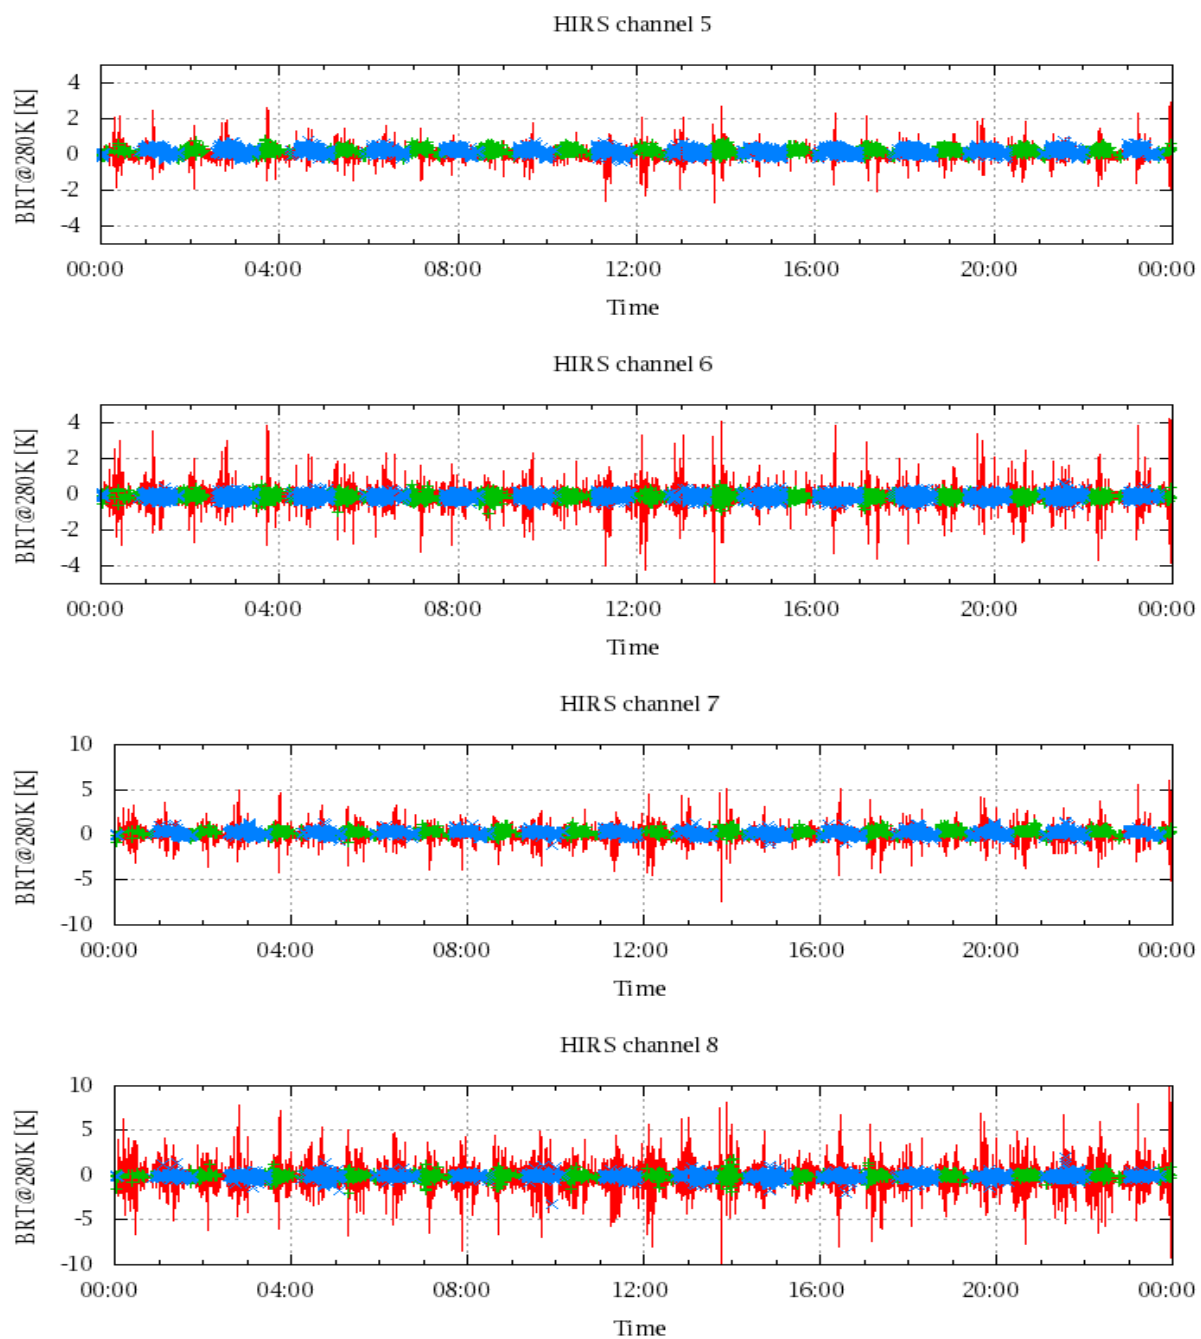


Figure 18: Radiance Differences in BRT

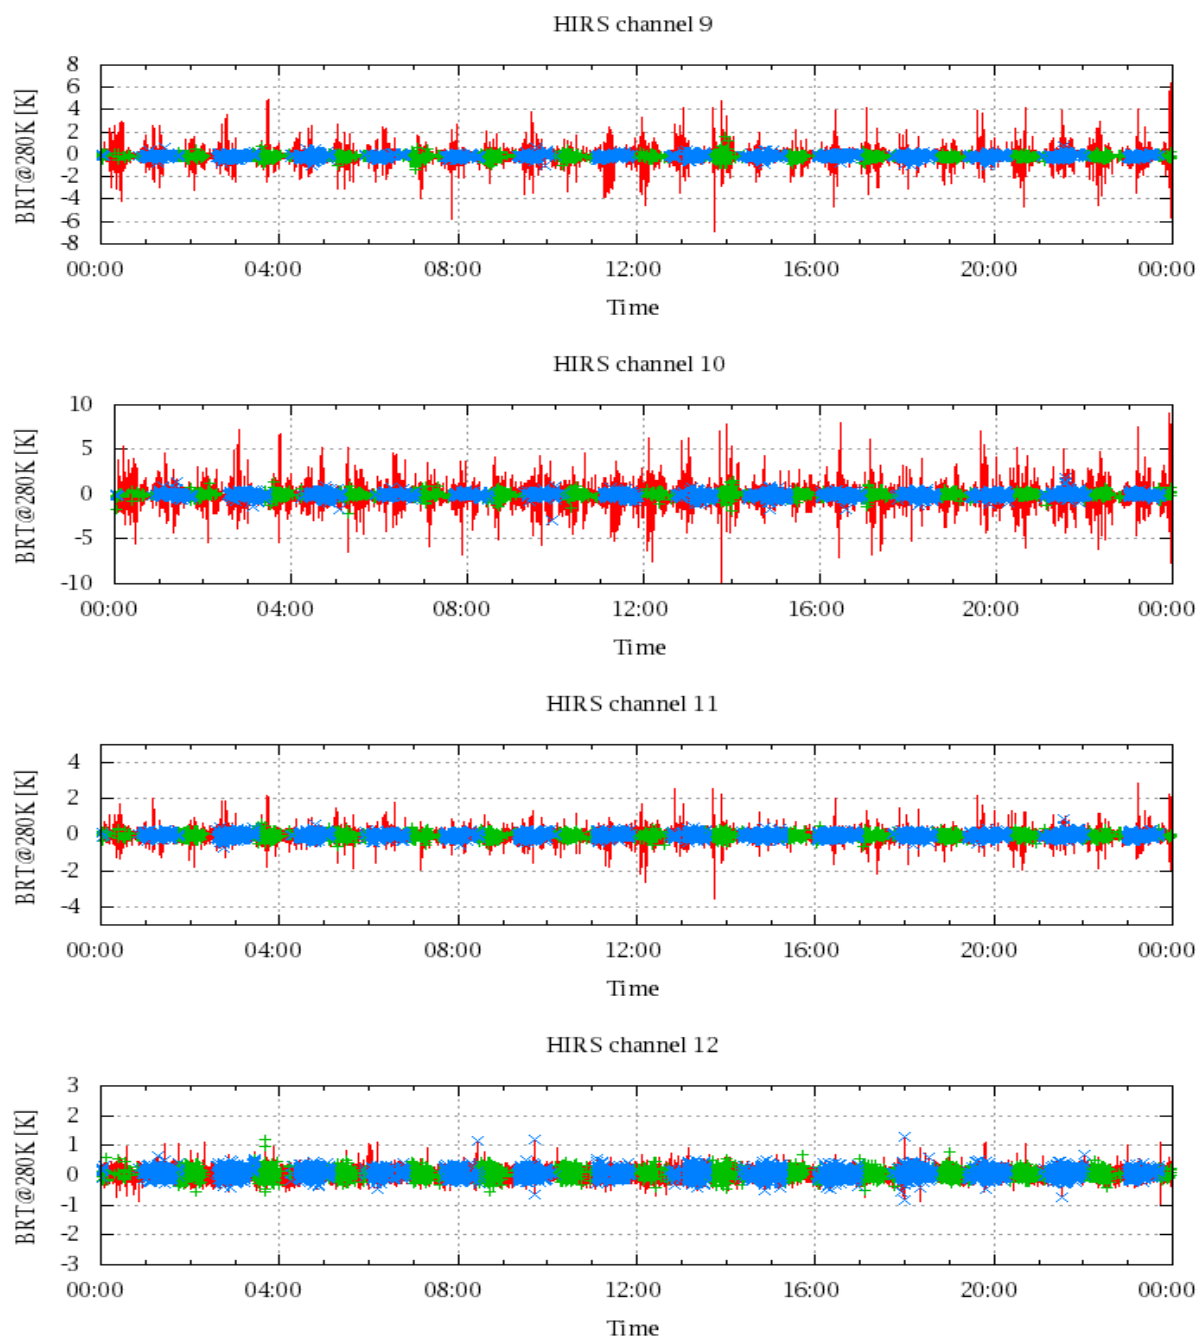


Figure 19: Radiance Differences in BRT

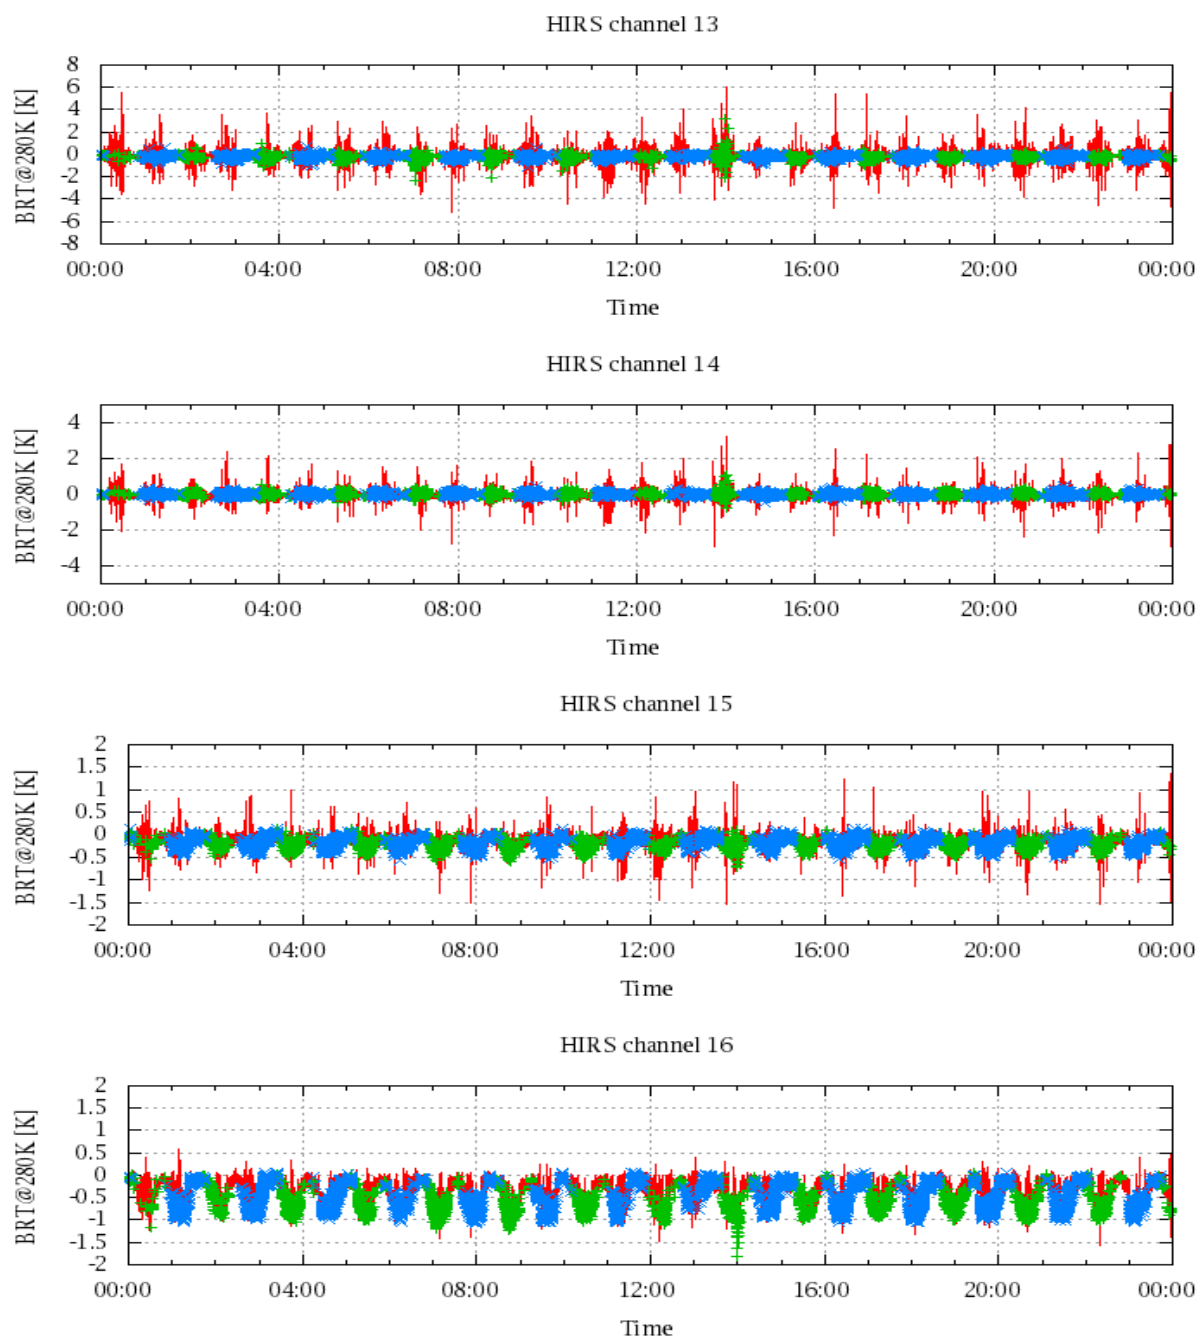


Figure 20: Radiance Differences in BRT

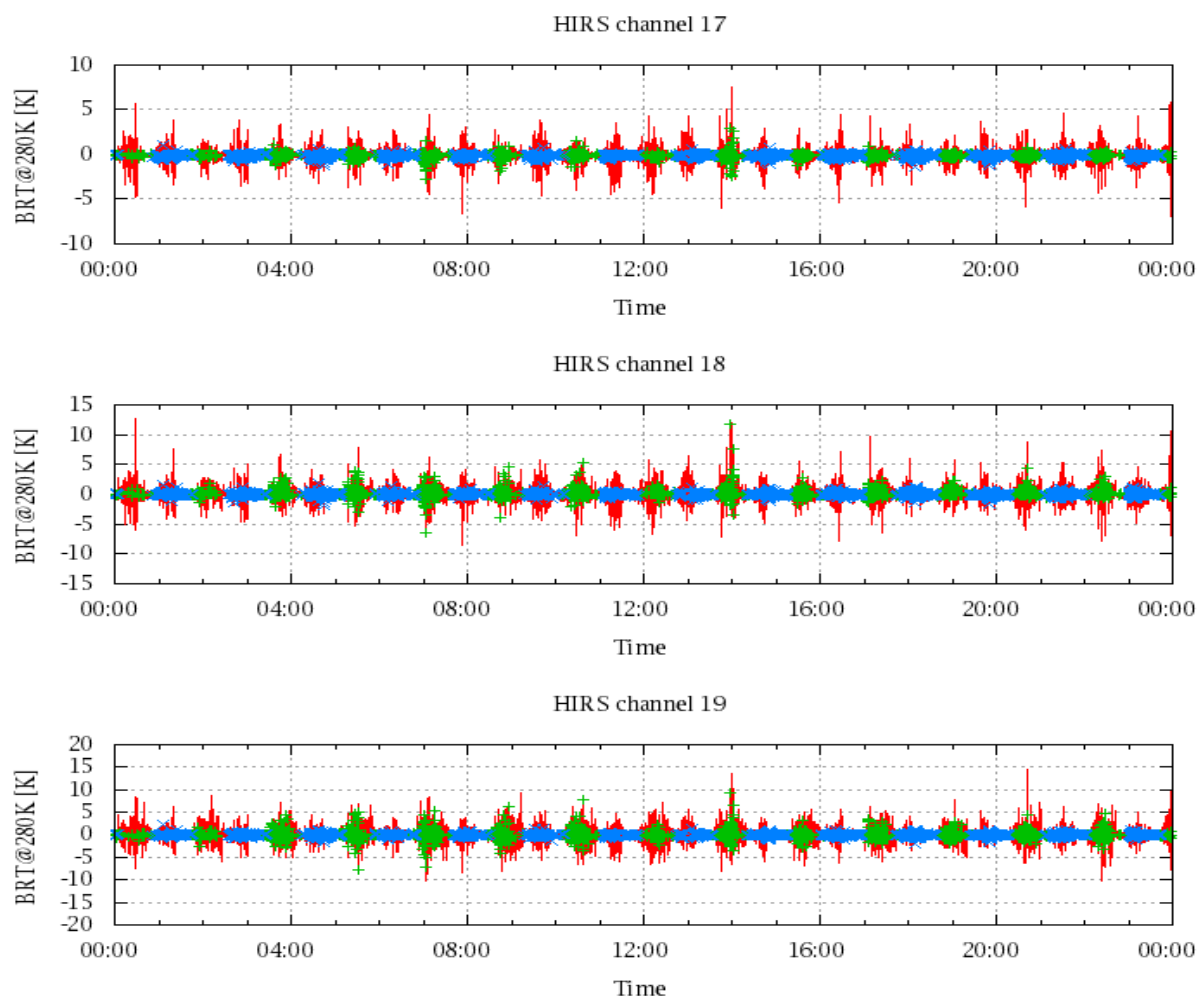


Figure 21: Radinace Differences in BRT