

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

06/03/2014 00:00:00 - 07/03/2014 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-B satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 06/03/2014 00:00:00 - 07/03/2014 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 06/03/2014 00:00:00 - 07/03/2014 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	479	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	11863	0	20140306121746.420	20140306122036.182
PX2 (135)	11889	0	20140306121753.553	20140306122036.182
PX3 (140)	11889	0	20140306121753.553	20140306122036.182
PX4 (145)	11889	0	20140306121753.553	20140306122036.182
IMG (150)	11578	0	20140306121753.553	20140306122036.182
VER (160)	3717	2150	20140306121753.553	20140306131836.156
VER (160)	2150	2155	20140306131836.156	20140306131836.156
VER (160)	2155	2160	20140306131836.156	20140306131836.156
VER (160)	2160	2165	20140306131836.156	20140306131836.156
VER (160)	2165	2170	20140306131836.156	20140306131836.156
VER (160)	2170	2151	20140306131836.156	20140306131836.156
VER (160)	2151	2156	20140306131836.156	20140306131836.156
VER (160)	2156	2161	20140306131836.156	20140306131836.156
VER (160)	2161	2166	20140306131836.156	20140306131836.156
VER (160)	2166	2171	20140306131836.156	20140306131836.156
VER (160)	2171	2152	20140306131836.156	20140306131836.156
VER (160)	2152	2157	20140306131836.156	20140306131836.156
VER (160)	2157	2162	20140306131836.156	20140306131836.156

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
VER (160)	2162	2167	20140306131836.156	20140306131836.156
VER (160)	2167	2172	20140306131836.156	20140306131836.156
VER (160)	2172	2153	20140306131836.156	20140306131836.156
VER (160)	2153	2158	20140306131836.156	20140306131836.156
VER (160)	2158	2163	20140306131836.156	20140306131836.156
VER (160)	2163	2168	20140306131836.156	20140306131836.156
VER (160)	2168	2173	20140306131836.156	20140306131836.156
VER (160)	2173	2154	20140306131836.156	20140306131836.156
VER (160)	2154	2159	20140306131836.156	20140306131836.156
VER (160)	2159	2164	20140306131836.156	20140306131836.156
VER (160)	2164	2169	20140306131836.156	20140306131836.156
VER (160)	2169	2174	20140306131836.156	20140306131836.156
AUX (180)	4017	0	20140306121746.854	20140306122042.885

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
06/03/2014 00:00:00	-	Normal operation
06/03/2014 13:25:19	Normal operation	Auxiliary ASE synchronised

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.41 %	-
GQisFlagQual set (PX2)	99.51 %	-
GQisFlagQual set (PX3)	99.59 %	-
GQisFlagQual set (PX4)	99.53 %	-
GQisFlagQual set (all)	99.51 %	-

Table 4: Quality flags

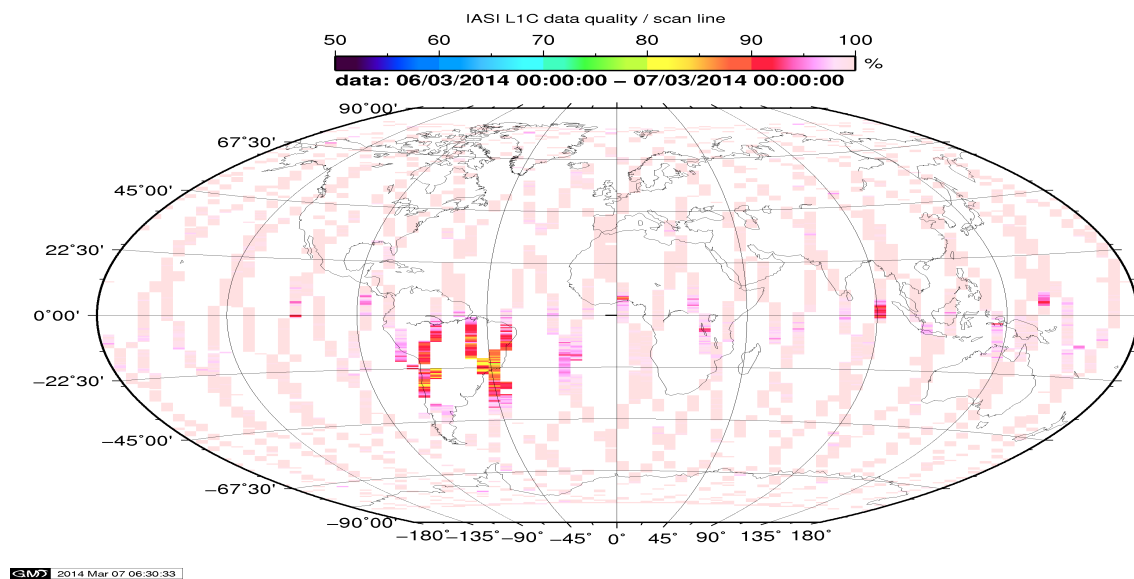


Figure 1: L1C data quality

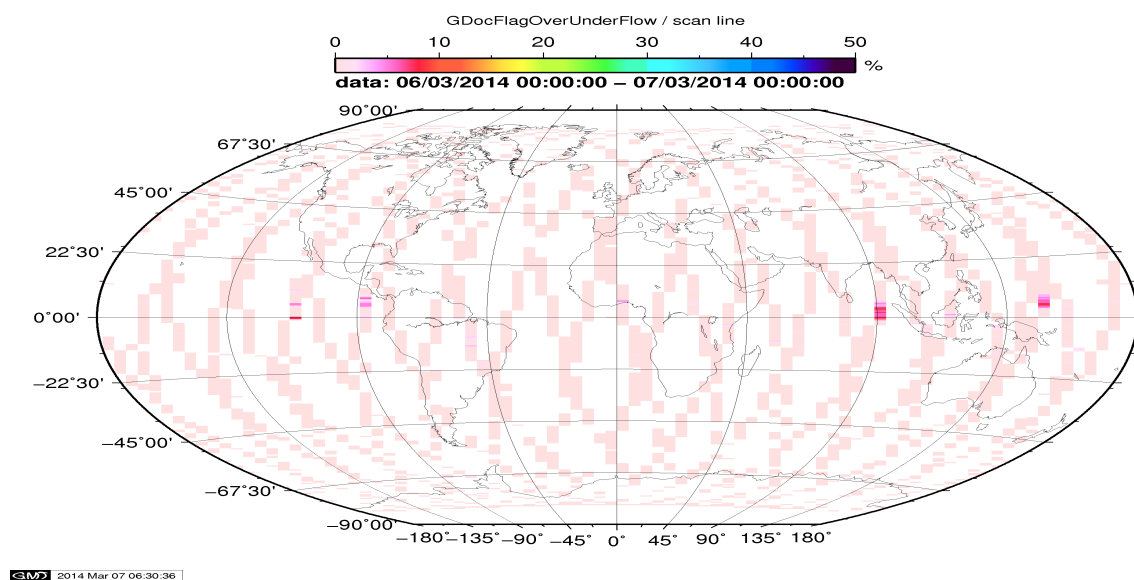


Figure 2: Flag of Over and Under Flows

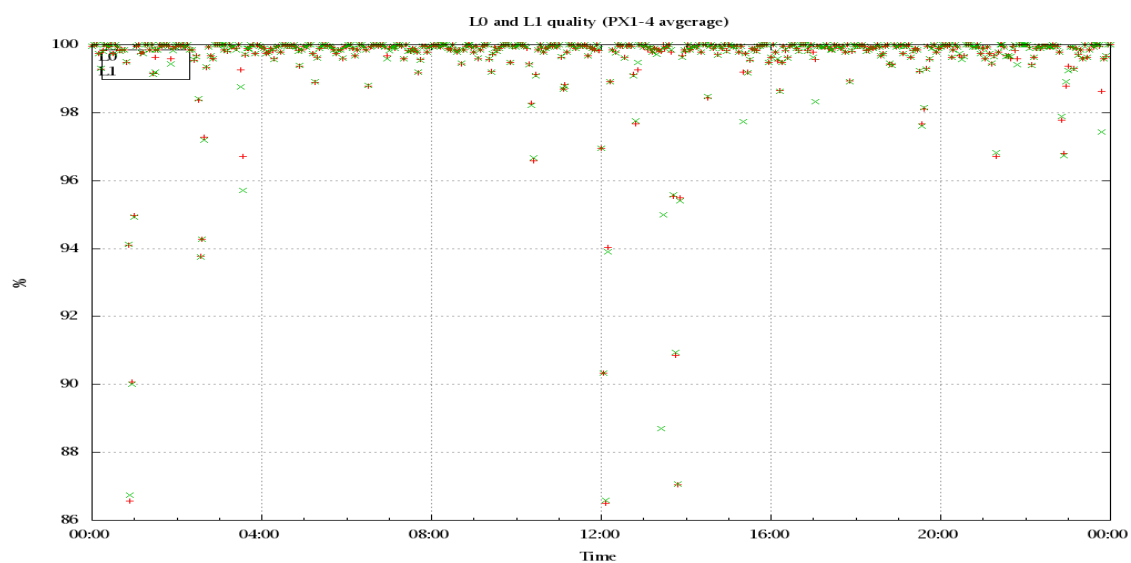


Figure 3: Level 0 and 1C overall quality

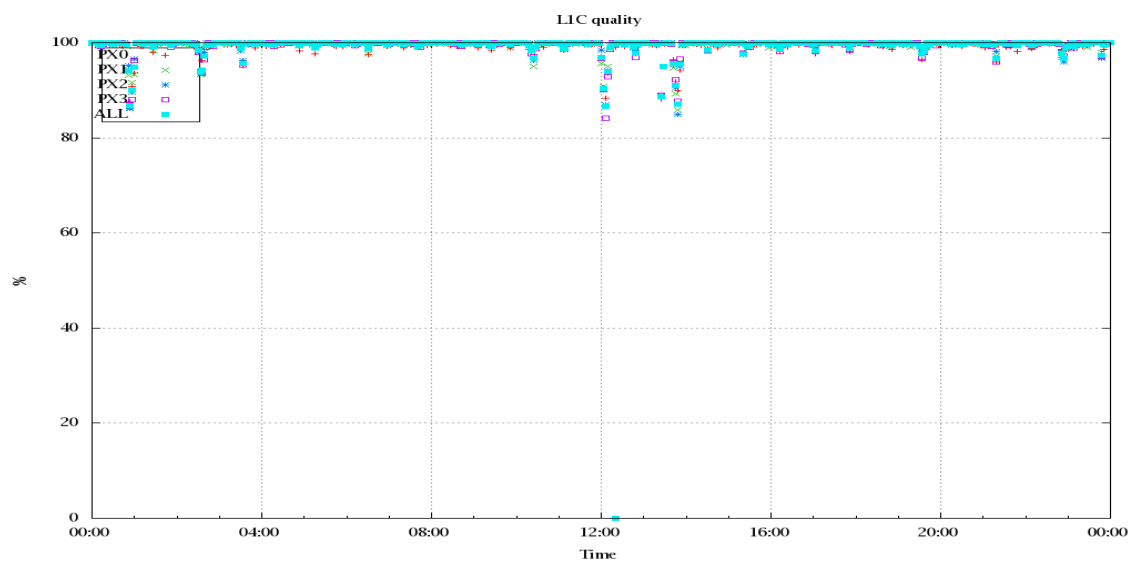


Figure 4: Level 1C quality

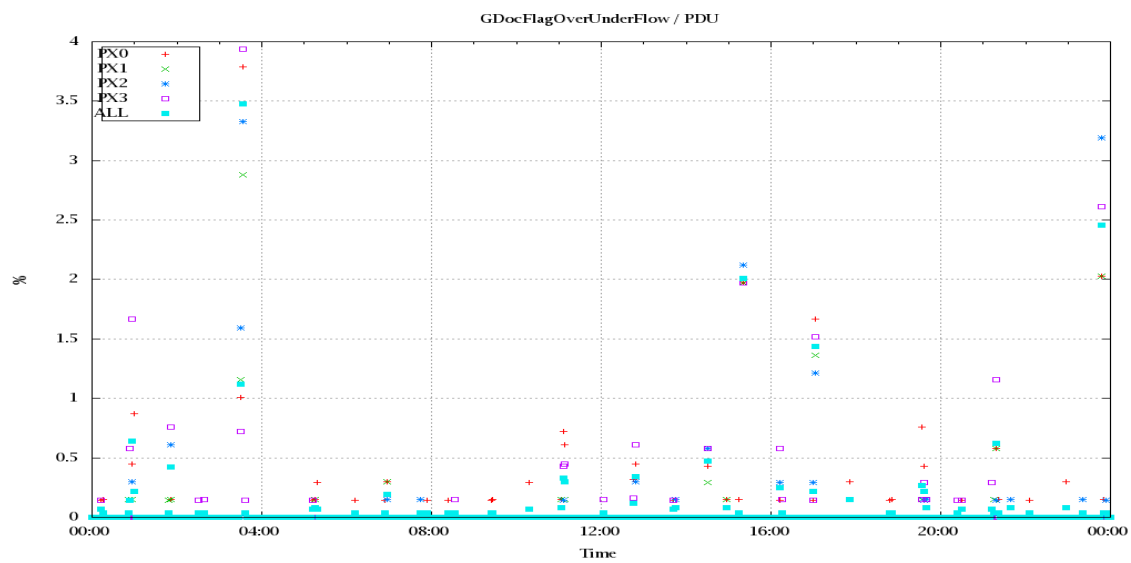


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

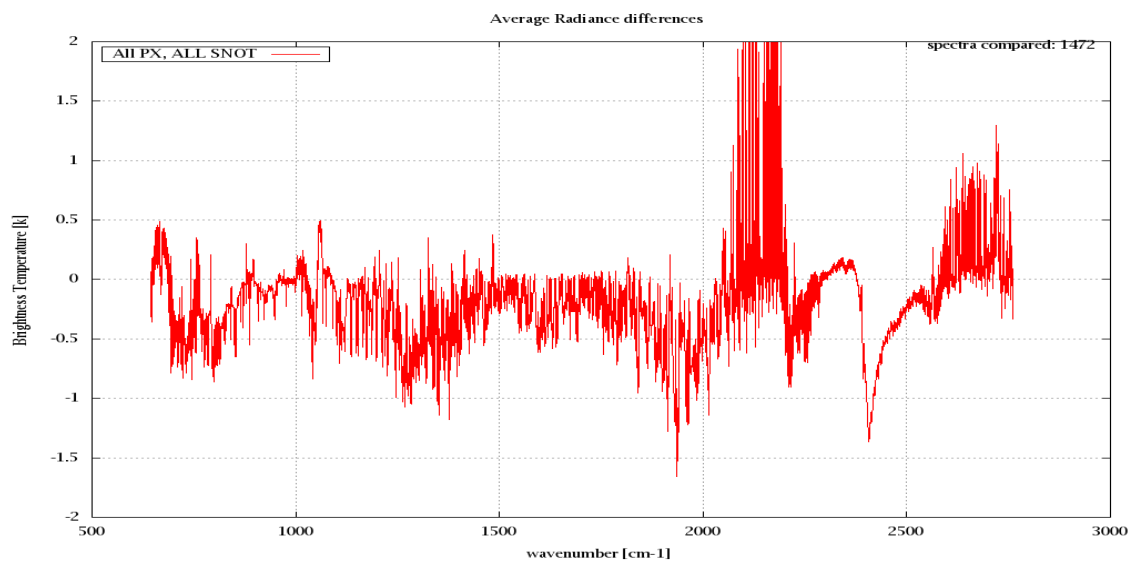


Figure 6: Average Radiance differences: OBS-CAL

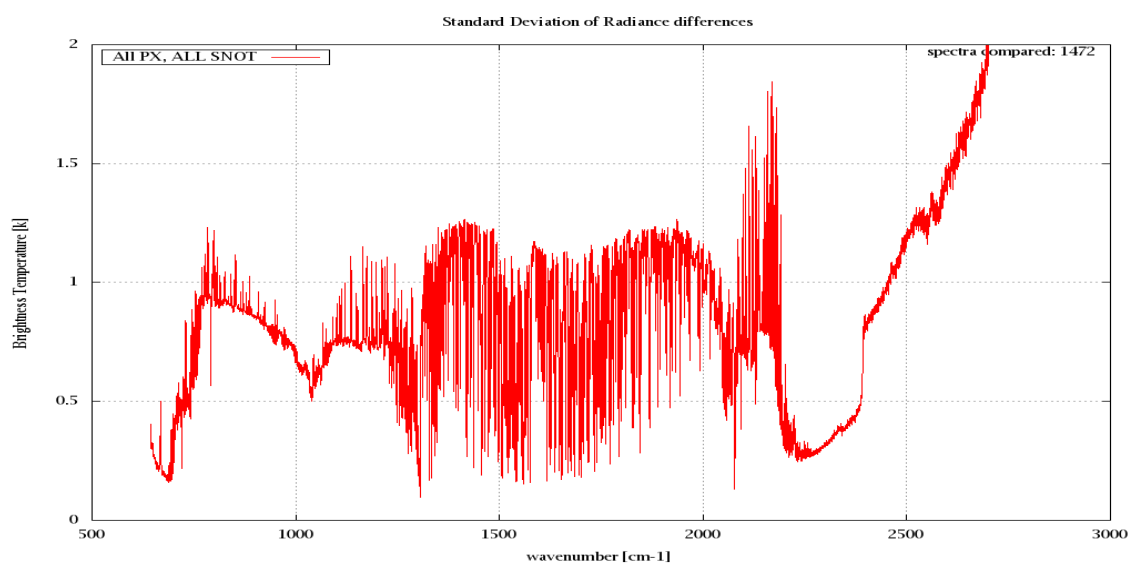


Figure 7: Standard Deviation of Radiance differences

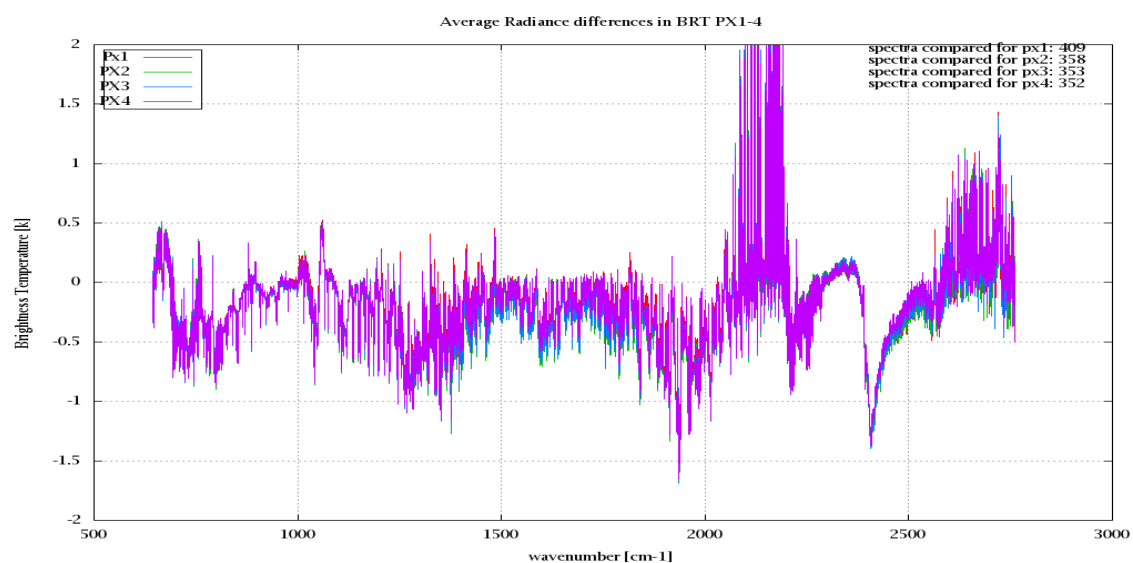


Figure 8: Average Radiance differences: OBS-CAL

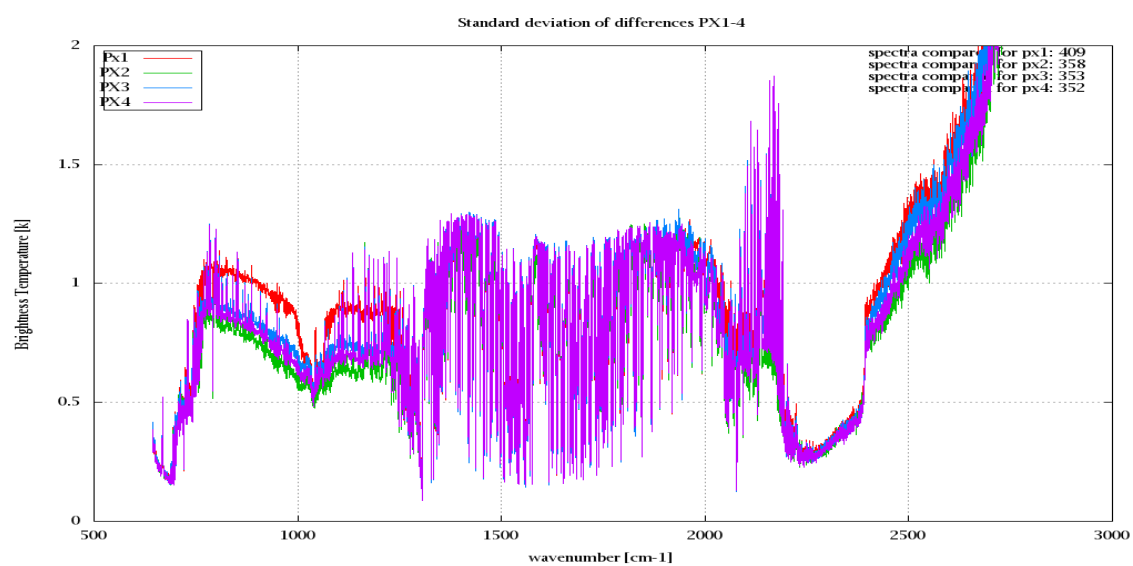


Figure 9: Standard Deviation of Radiance differences

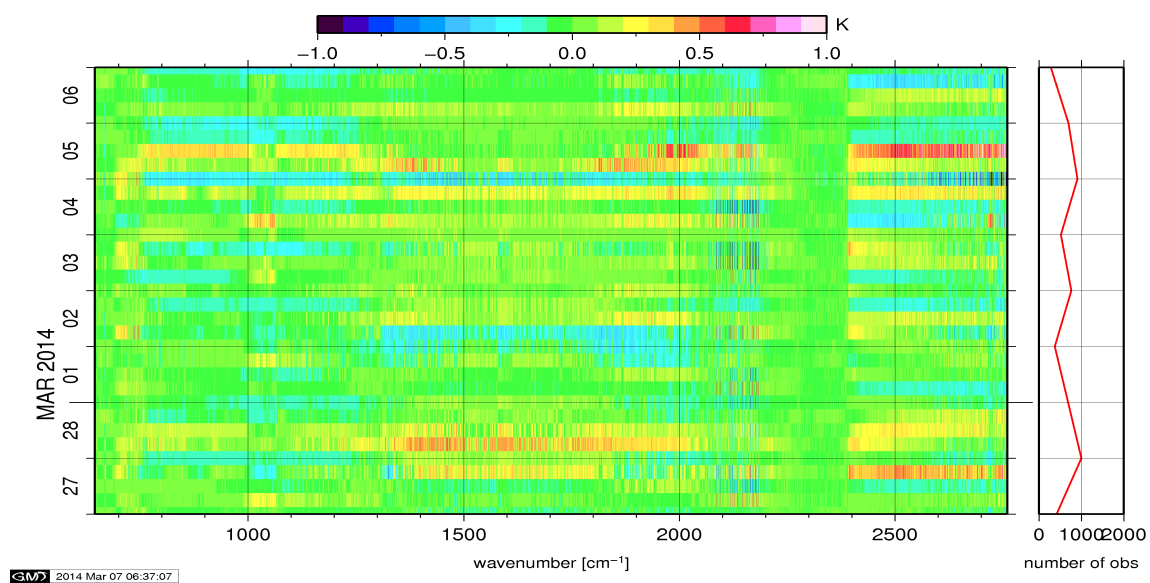


Figure 10: Radiance Anomaly in BRT: All Channels

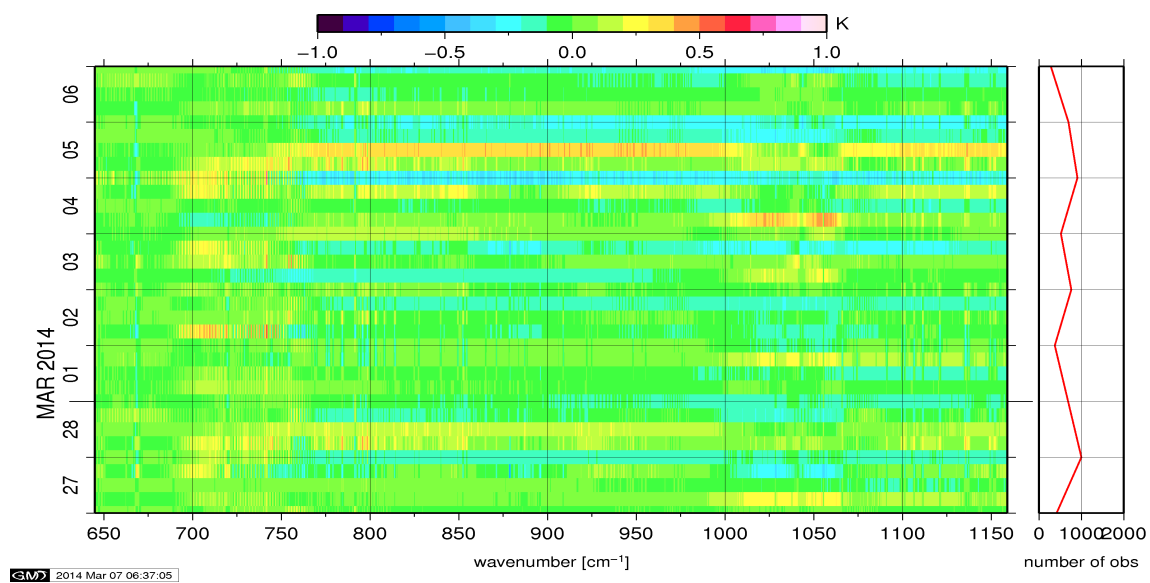


Figure 11: Radiance Anomaly in BRT: IASI Band 1

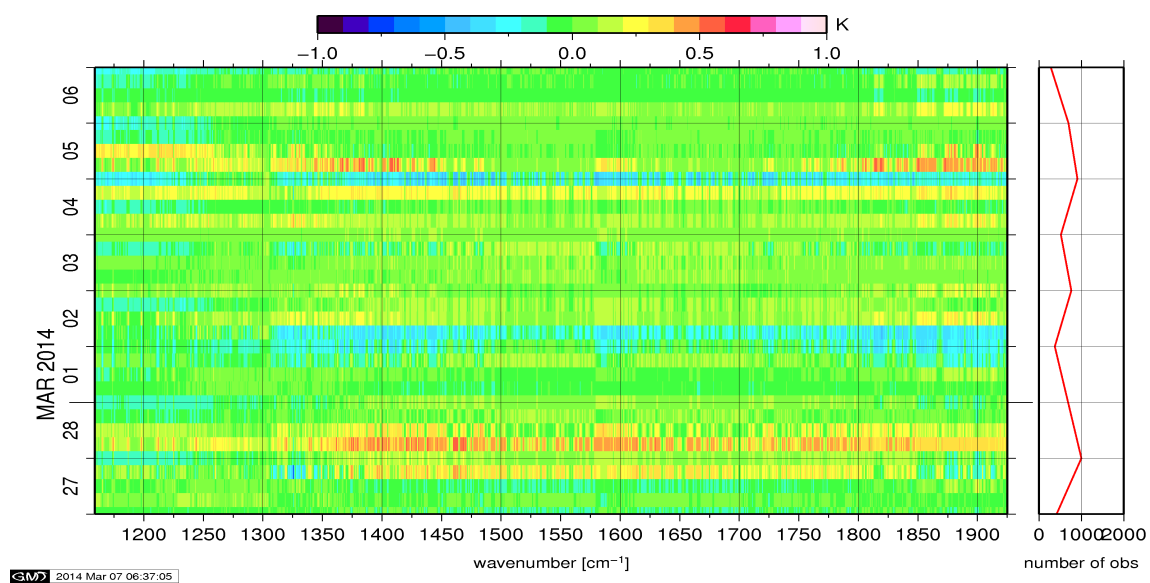


Figure 12: Radiance Anomaly in BRT: IASI Band 2

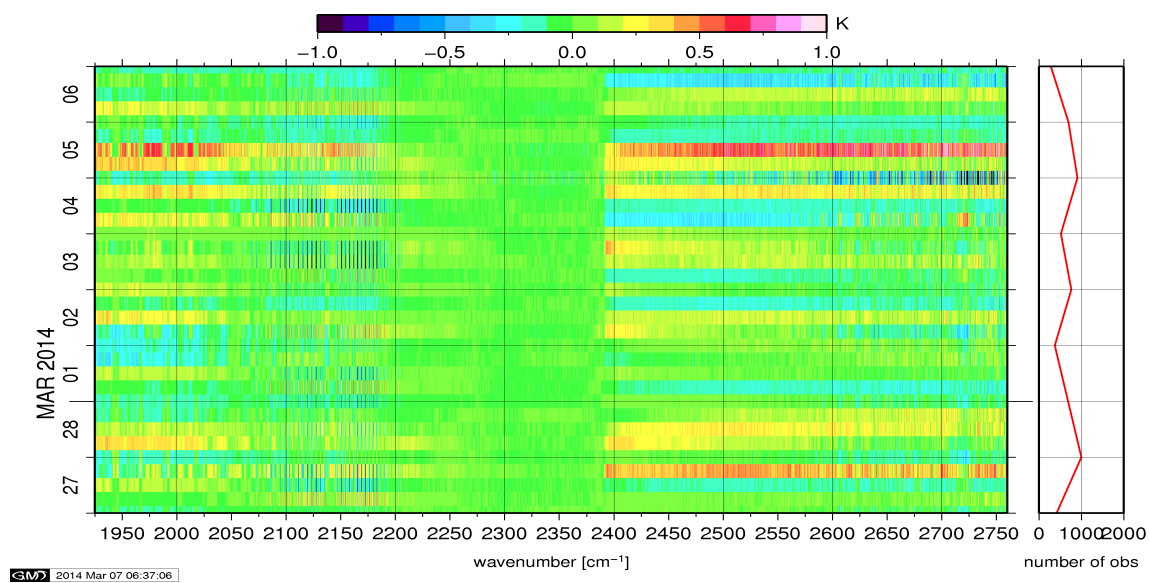


Figure 13: Radiance Anomaly in BRT: IASI Band 3

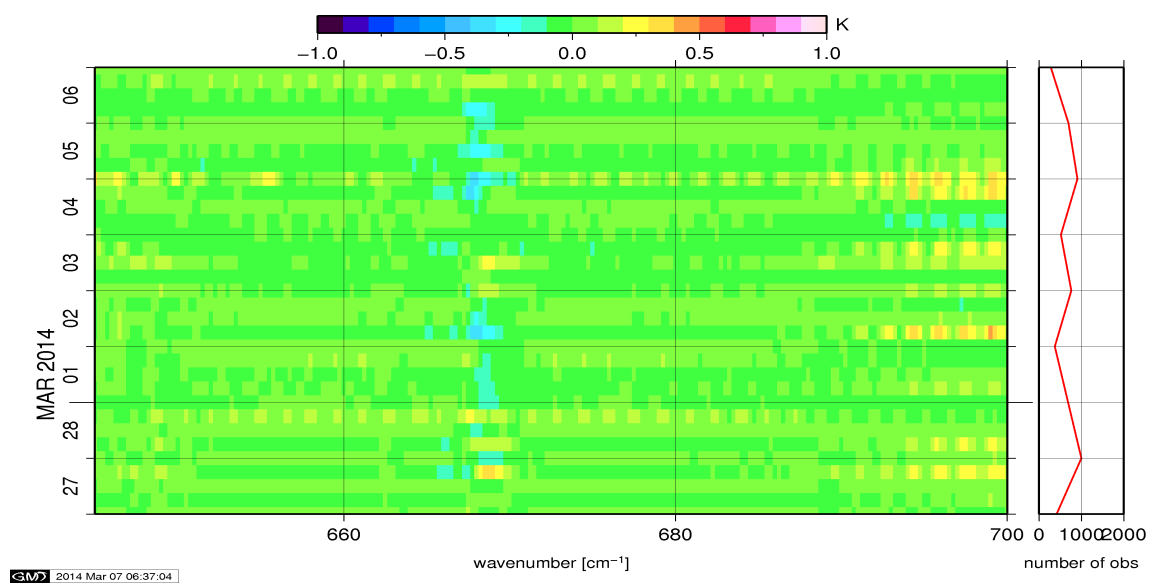


Figure 14: Radiance Anomaly in BRT: CO2 14

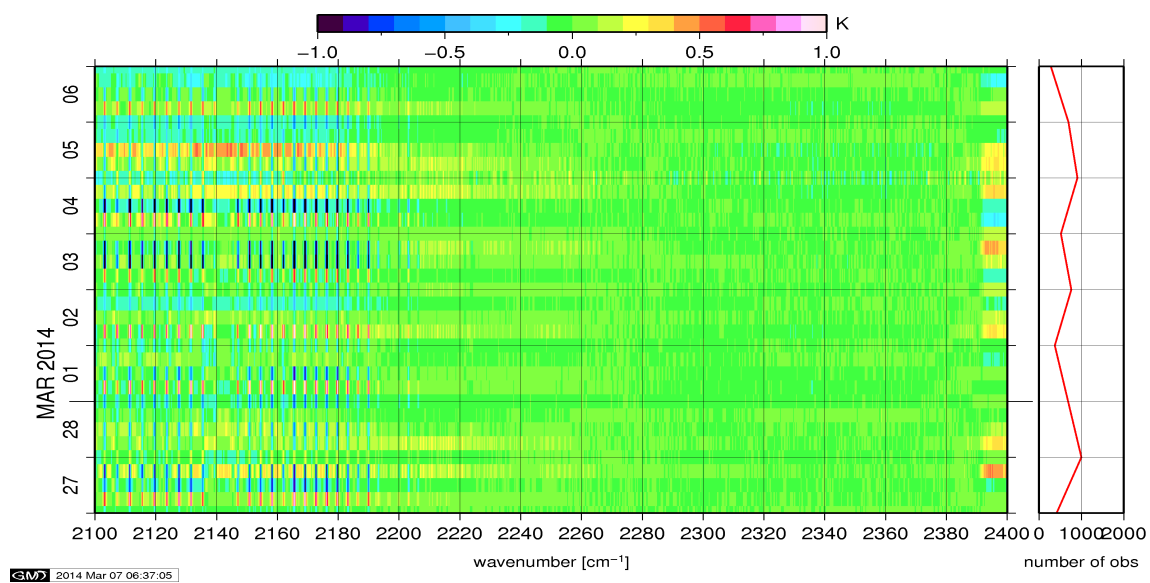


Figure 15: Radiance Anomaly in BRT: CO2 4.3

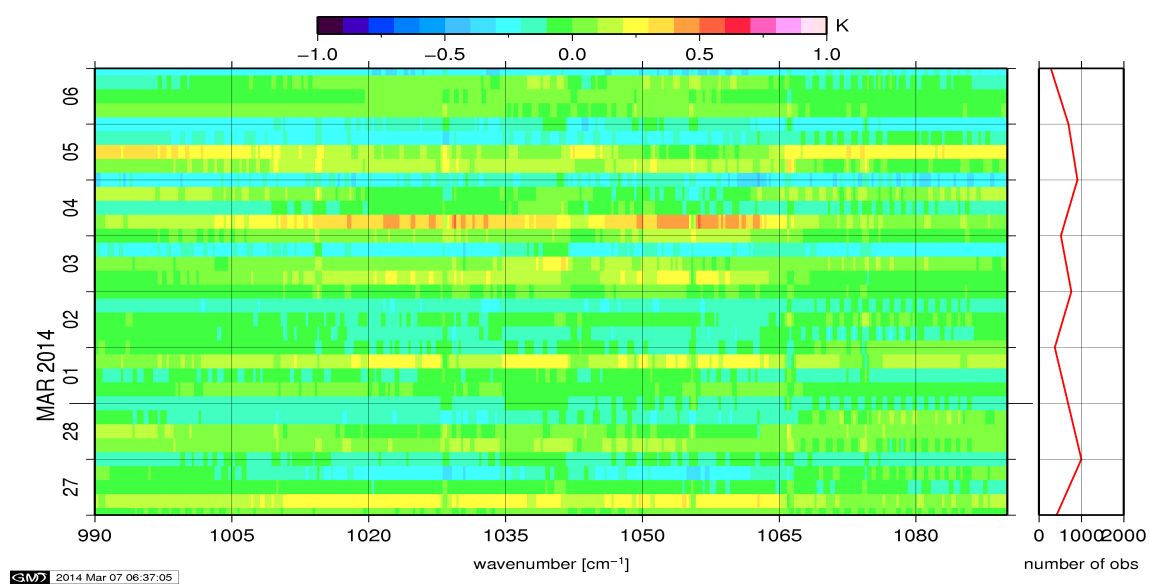


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

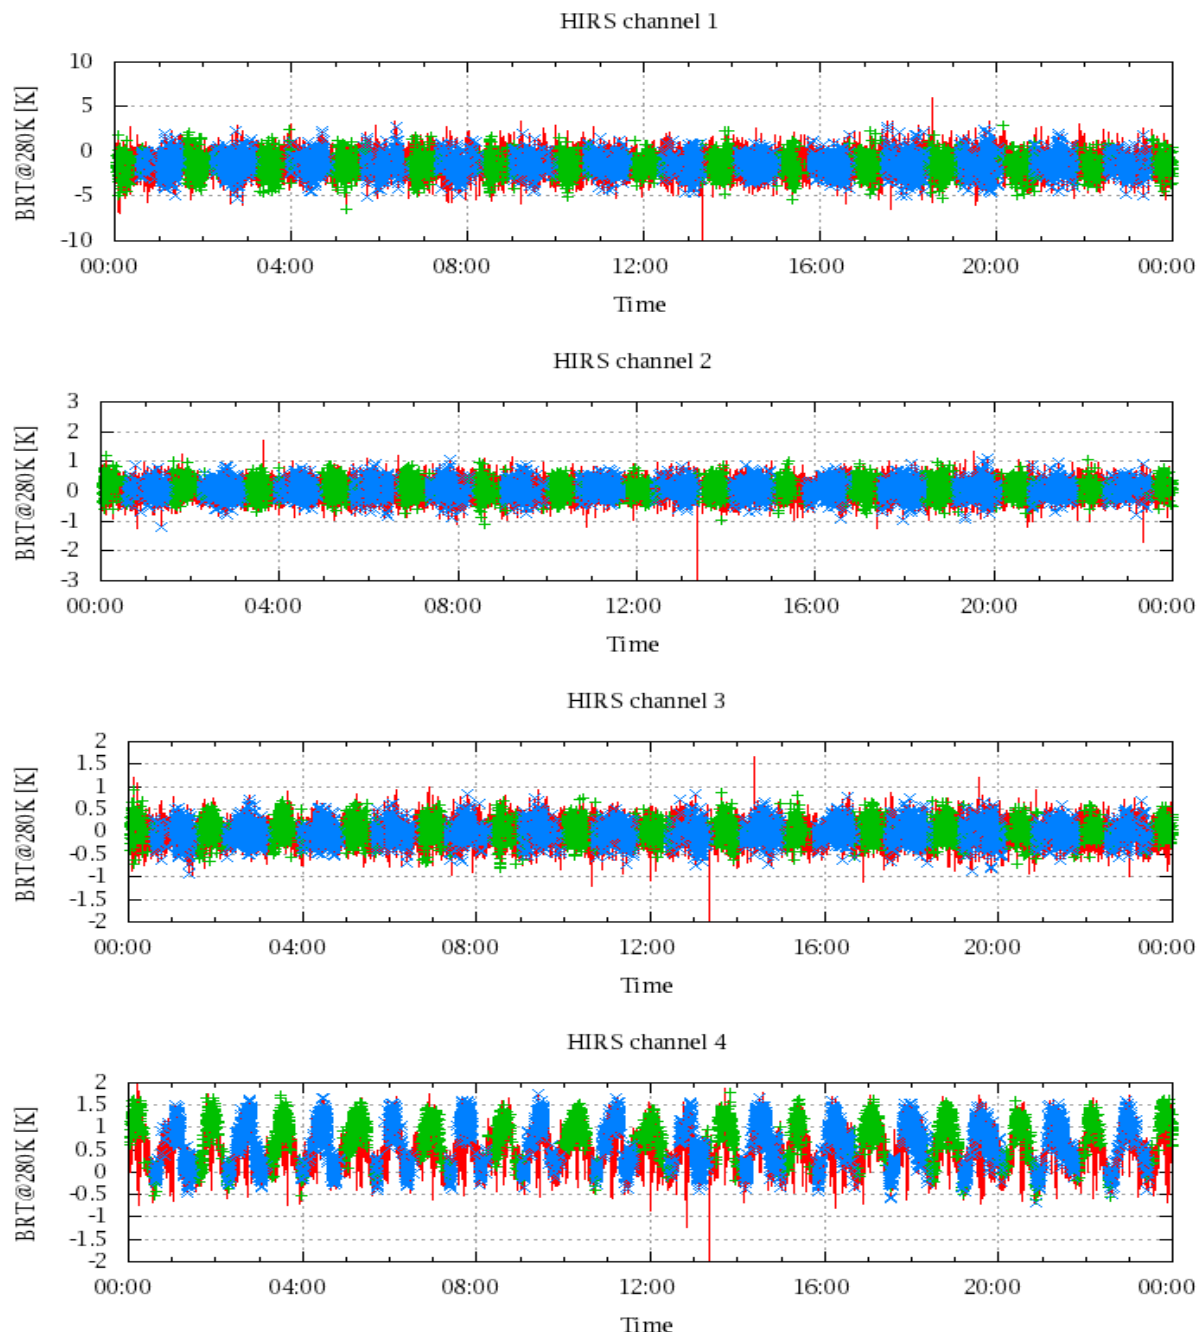


Figure 17: Radiance Differences in BRT

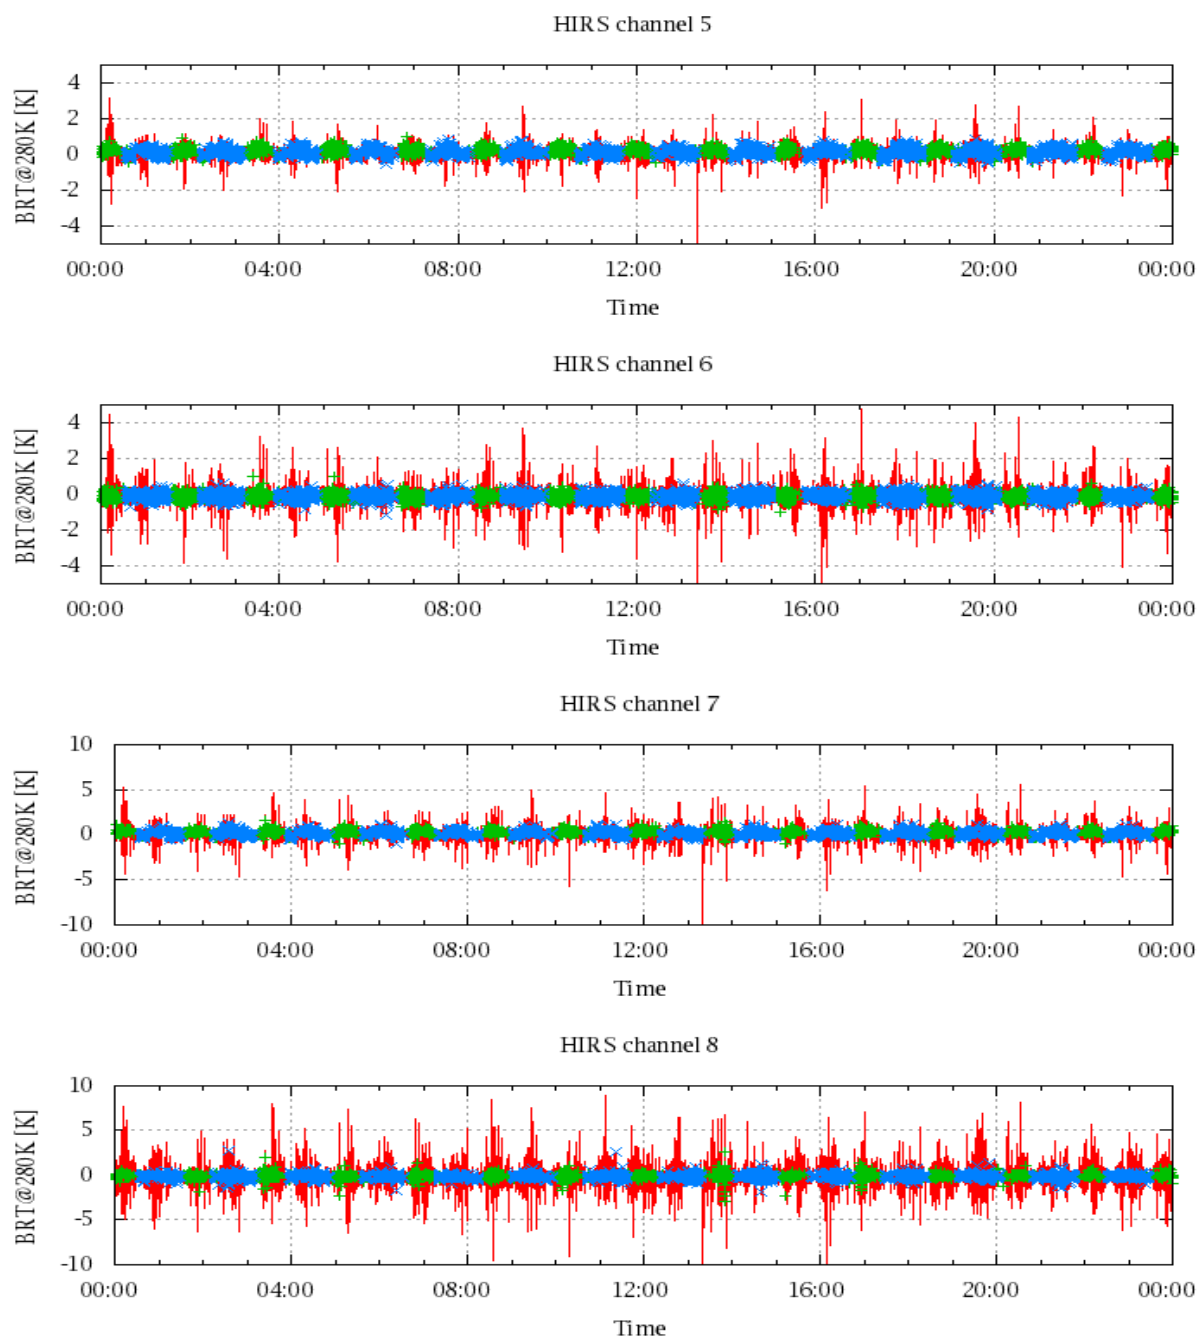


Figure 18: Radiance Differences in BRT

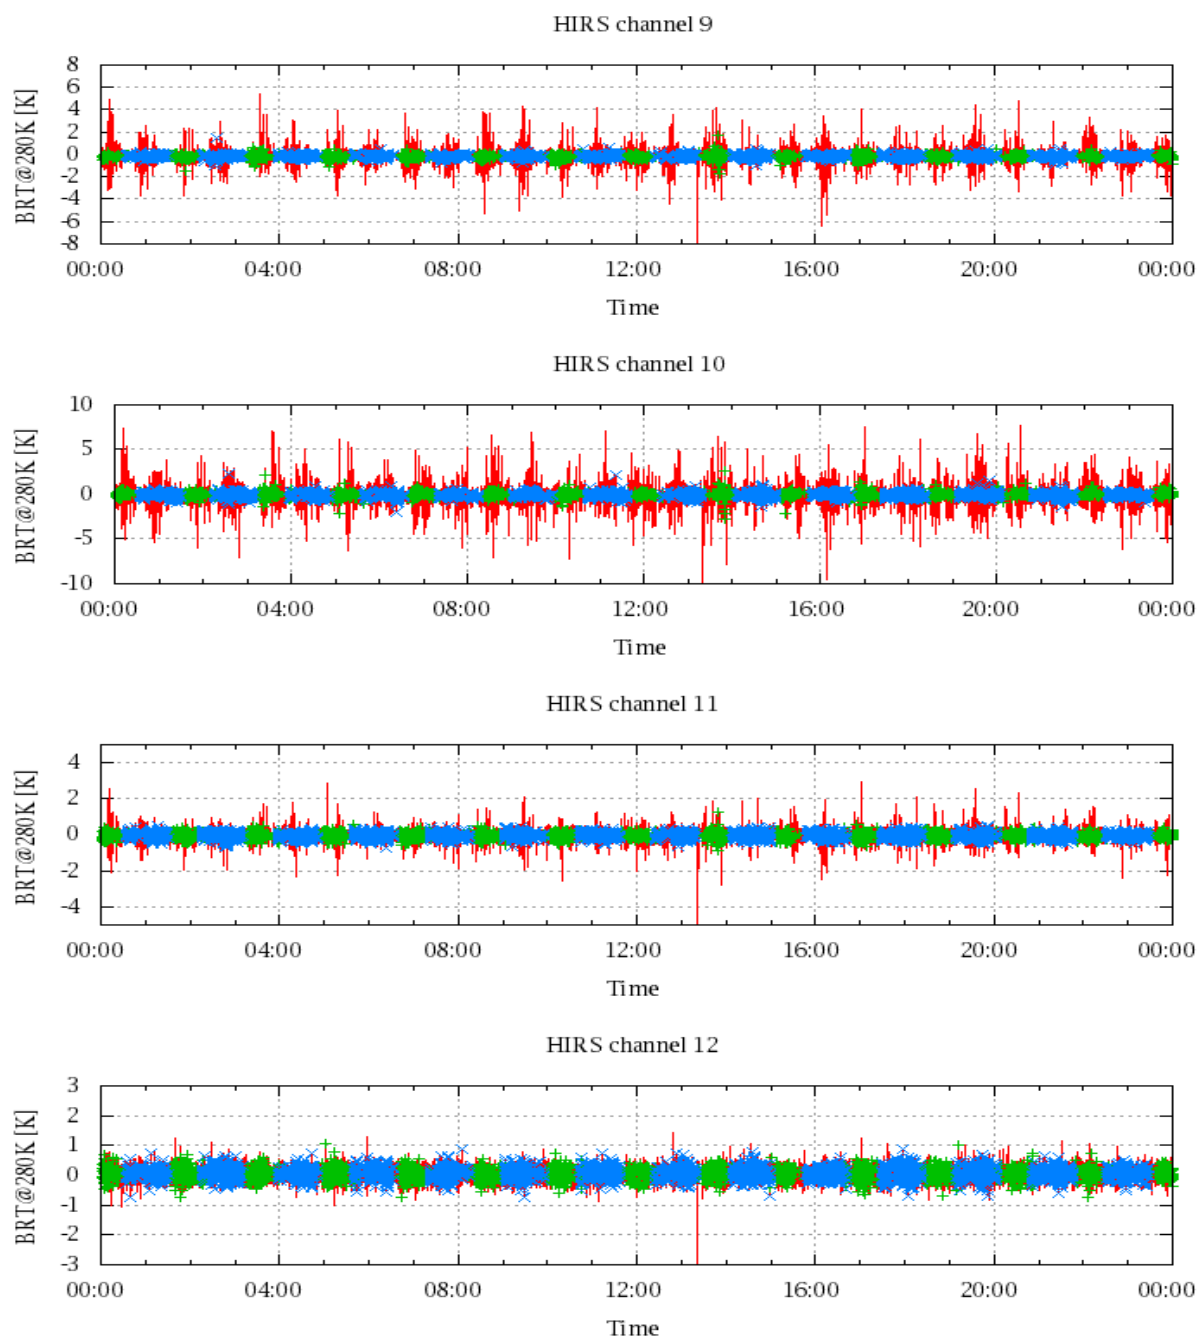


Figure 19: Radiance Differences in BRT

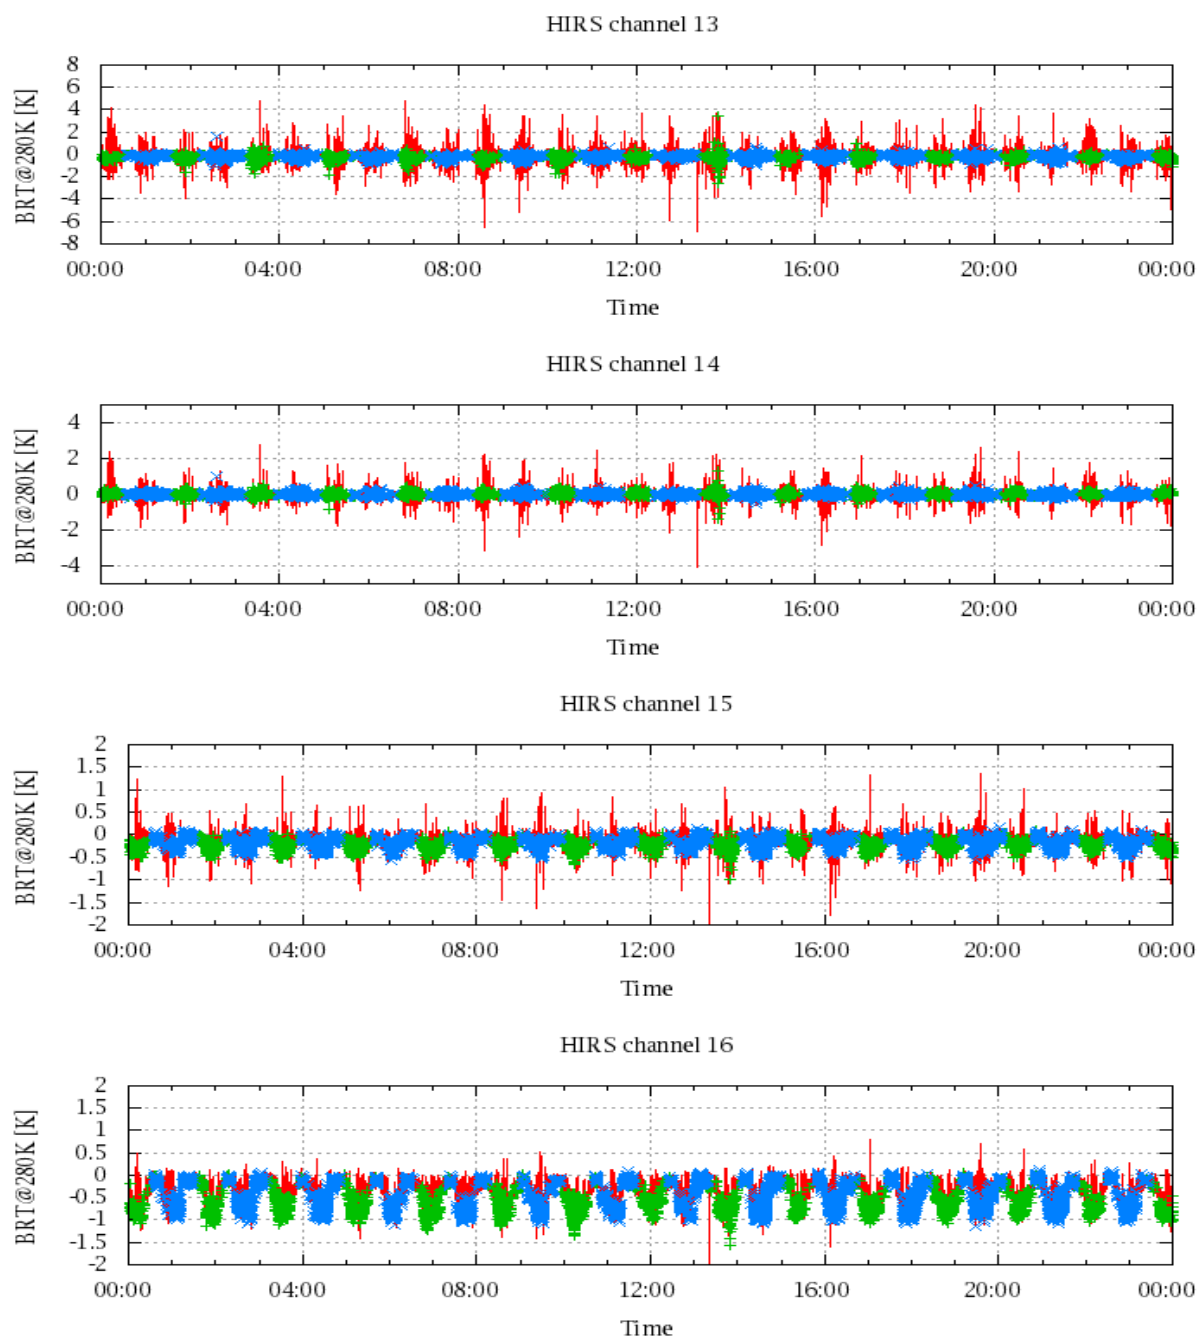


Figure 20: Radiance Differences in BRT

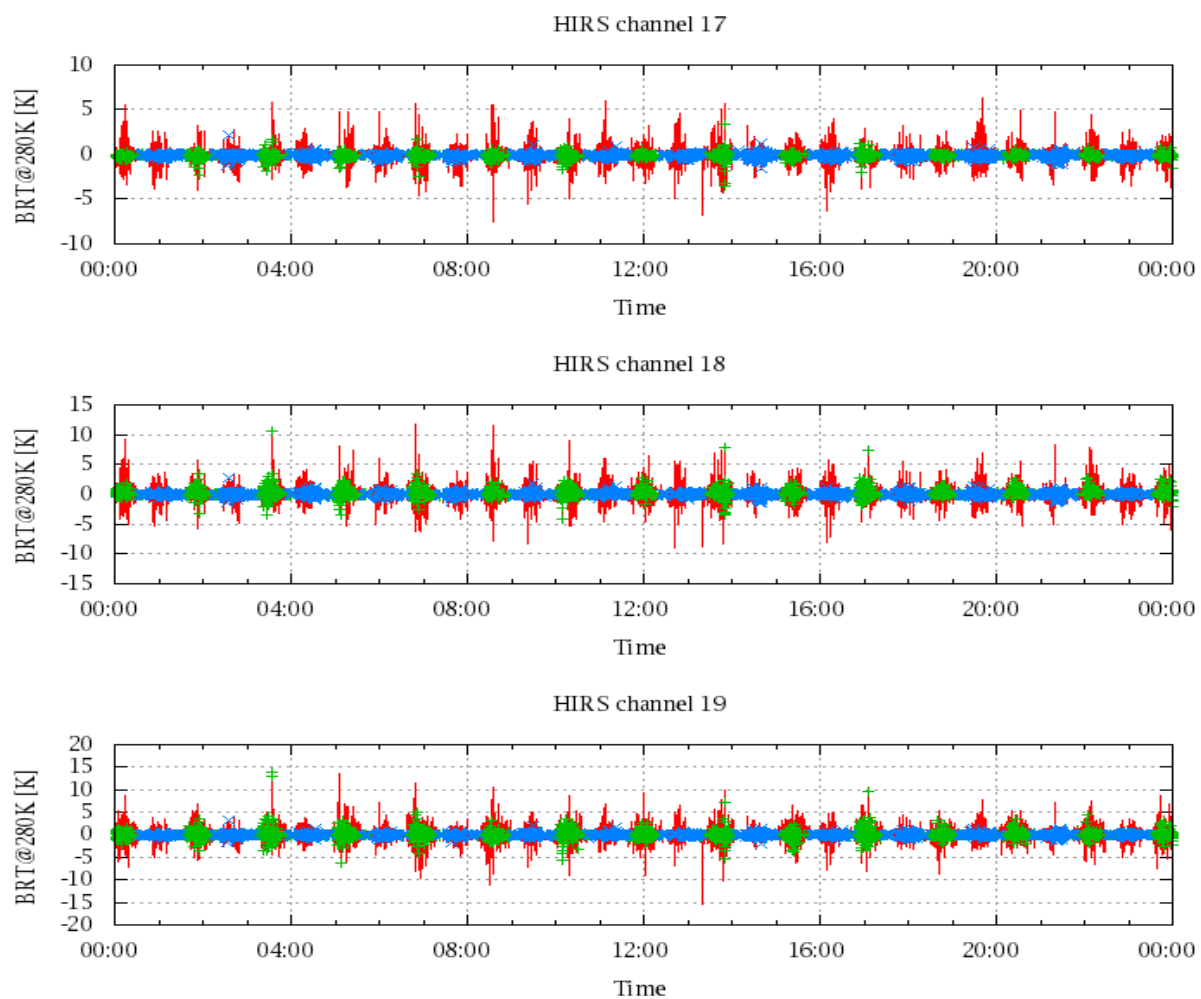


Figure 21: Radinace Differences in BRT