

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

02/06/2014 00:00:00 - 03/06/2014 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-B satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 02/06/2014 00:00:00 - 03/06/2014 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 02/06/2014 00:00:00 - 03/06/2014 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	435	e
L0 IASI PDUs	435	e
L1 ENG PDUs	434	e
L1 ENG distinct GEPSGranule	435	a
L1 DPX PDUs (RM: IASI-HIRS)	431	e
L1 DPS Files (RM: OBS-CAL NWP based)	434	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	518	11592	20140602120802.618	20140602125715.473
PX1 (130)	6848	1547	20140602134859.496	20140602143815.808
PX1 (130)	12904	7595	20140602152843.471	20140602161756.541
PX2 (135)	517	11592	20140602120802.404	20140602125715.473
PX2 (135)	6848	1547	20140602134859.496	20140602143815.808
PX2 (135)	12904	7595	20140602152843.471	20140602161756.541
PX3 (140)	517	11592	20140602120802.404	20140602125715.473
PX3 (140)	6848	1547	20140602134859.496	20140602143815.808
PX3 (140)	12904	7595	20140602152843.471	20140602161756.541
PX4 (145)	517	11592	20140602120802.404	20140602125715.473
PX4 (145)	6848	1547	20140602134859.496	20140602143815.808
PX4 (145)	12904	7595	20140602152843.471	20140602161756.541
IMG (150)	3757	16308	20140602120802.404	20140602125715.473
IMG (150)	13115	9291	20140602134859.281	20140602143814.511
IMG (150)	5780	1946	20140602152843.471	20140602161756.326
VER (160)	16349	1811	20140602120758.079	20140602125718.067

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
VER (160)	3750	5601	20140602134854.090	20140602143822.077
VER (160)	7490	9336	20140602152838.069	20140602161758.056
AUX (180)	13097	13467	20140602120758.513	20140602125718.501
AUX (180)	13854	14224	20140602134854.523	20140602143814.511
AUX (180)	14602	14972	20140602152838.499	20140602161758.490

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
02/06/2014 00:00:03	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	435	e
L1 ENG PDUs	434	e
L1 ENG distinct GEPSGranule	435	a
GQisFlagQual set (PX1)	99.17 %	-
GQisFlagQual set (PX2)	99.27 %	-
GQisFlagQual set (PX3)	99.33 %	-
GQisFlagQual set (PX4)	99.21 %	-
GQisFlagQual set (all)	99.25 %	-

Table 4: Quality flags

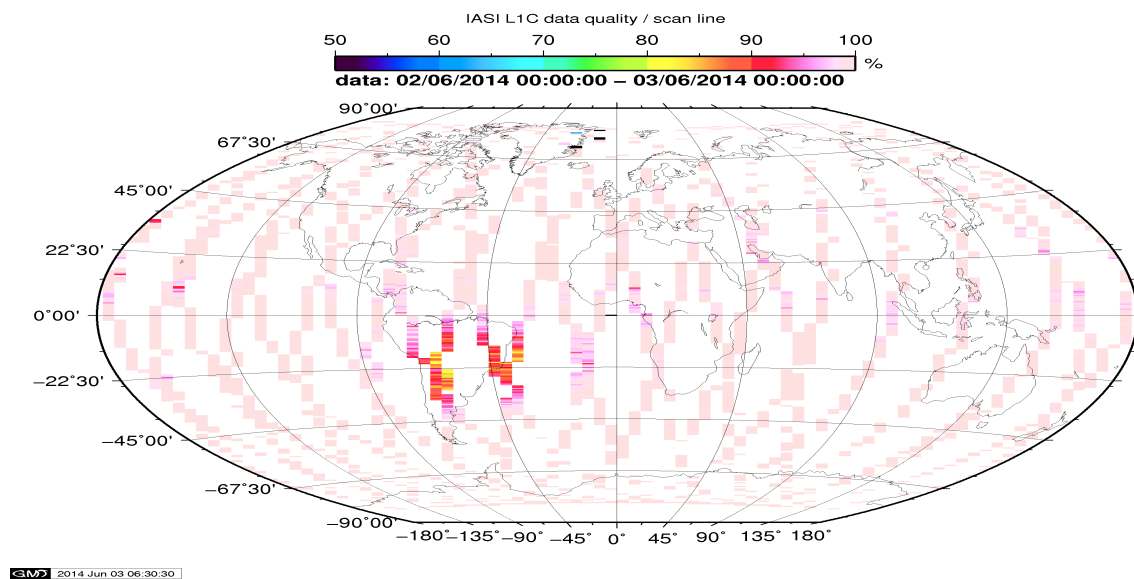


Figure 1: L1C data quality

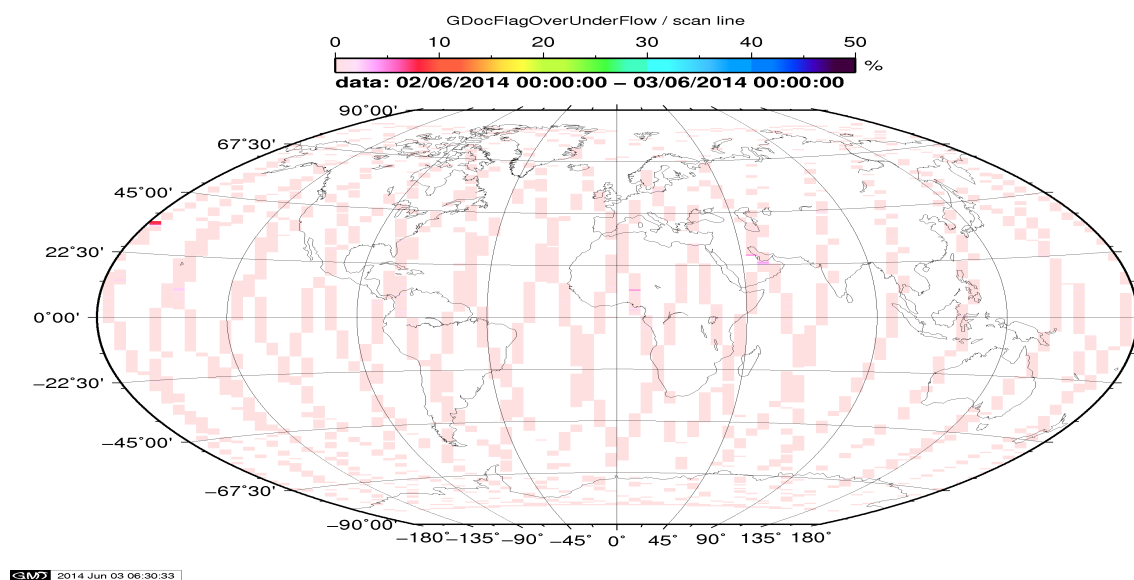


Figure 2: Flag of Over and Under Flows

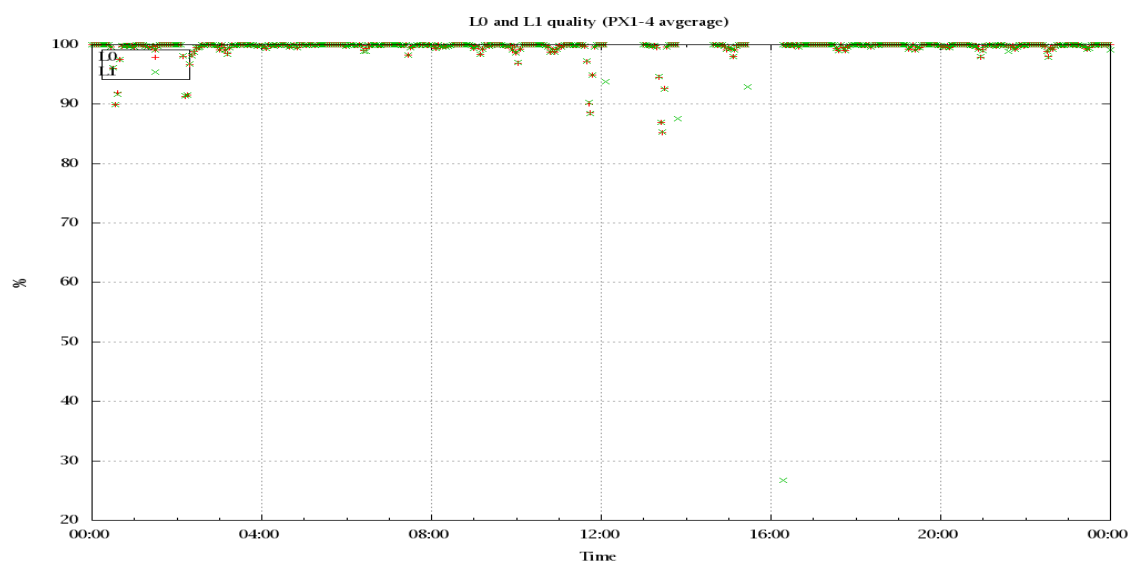


Figure 3: Level 0 and 1C overall quality

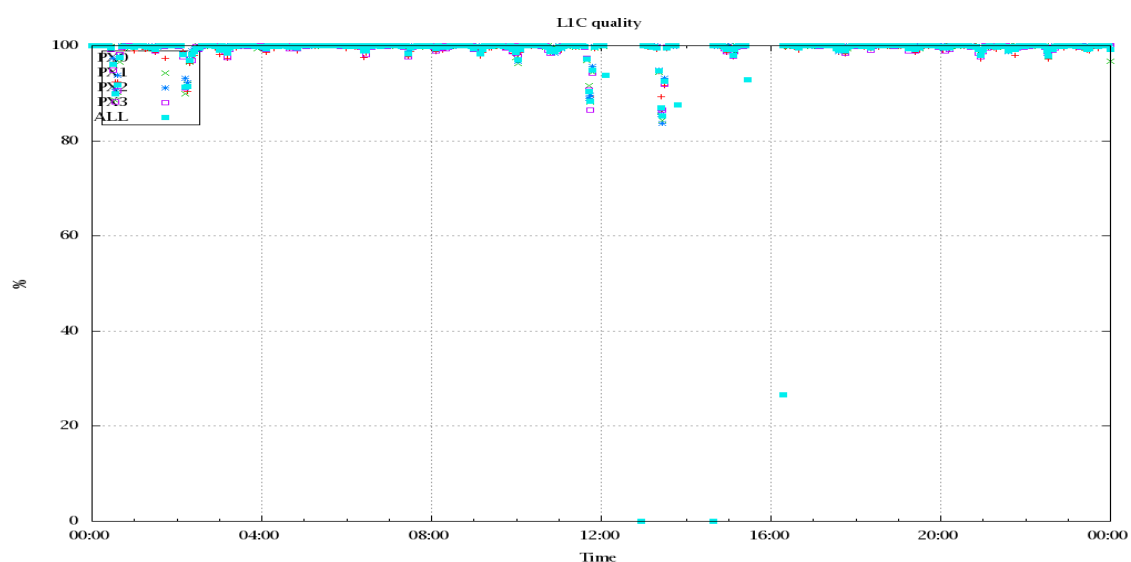


Figure 4: Level 1C quality

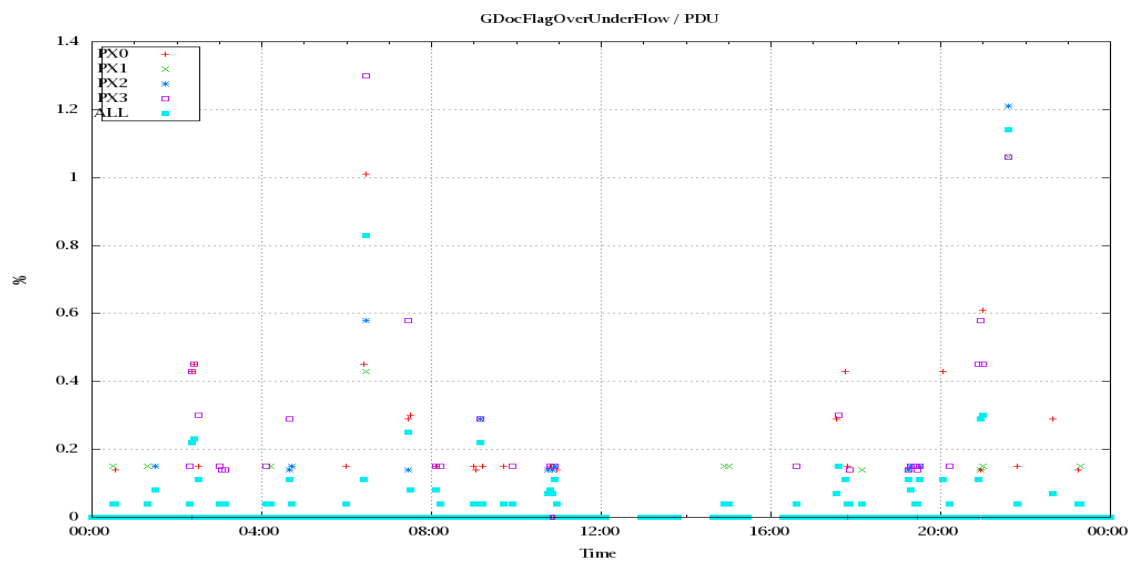


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

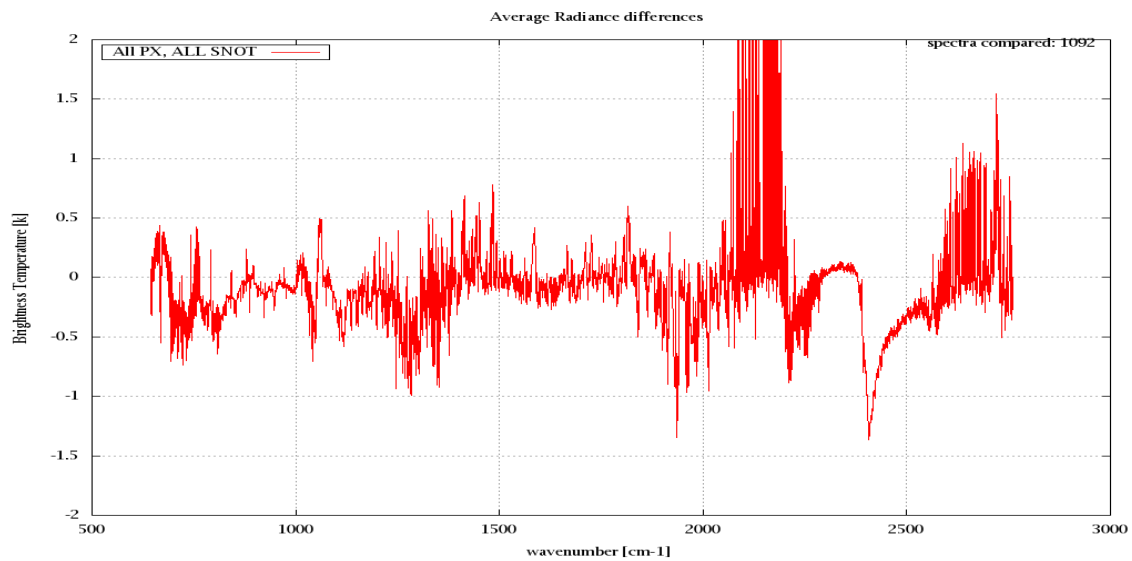


Figure 6: Average Radiance differences: OBS-CAL

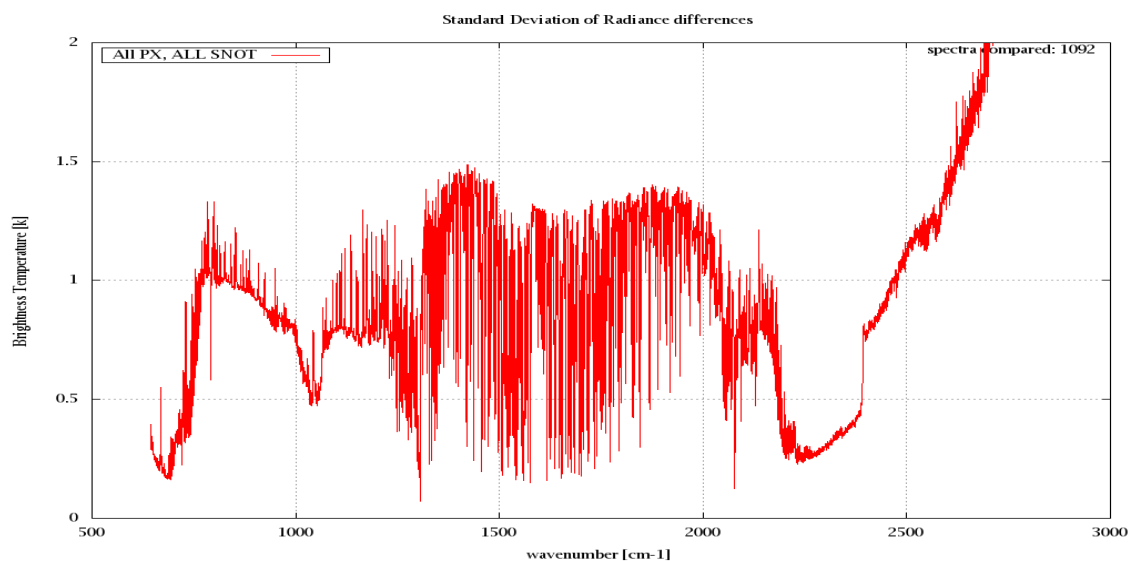


Figure 7: Standard Deviation of Radiance differences

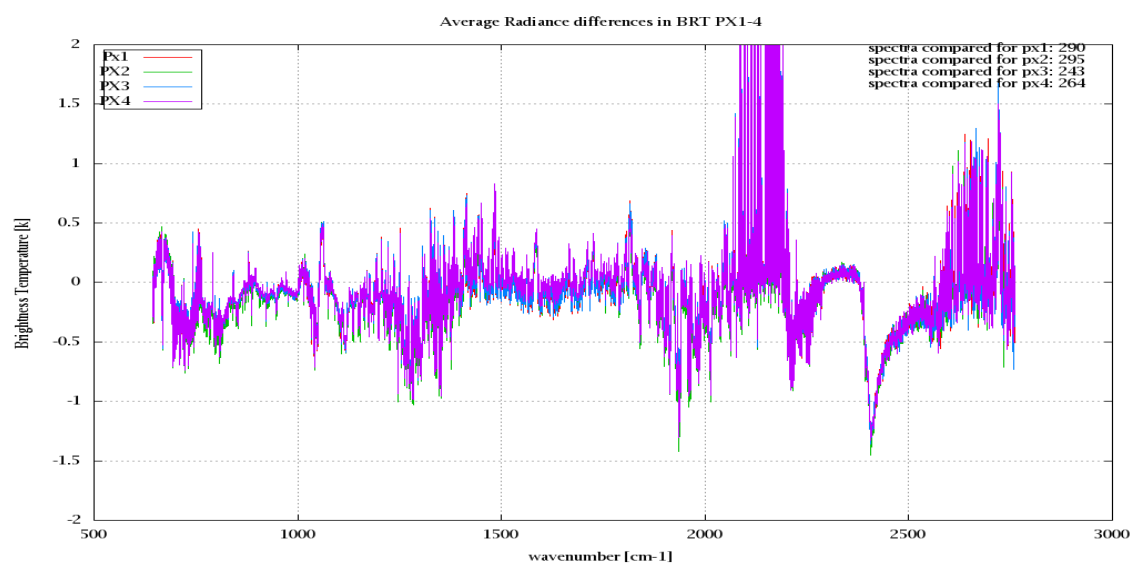


Figure 8: Average Radiance differences: OBS-CAL

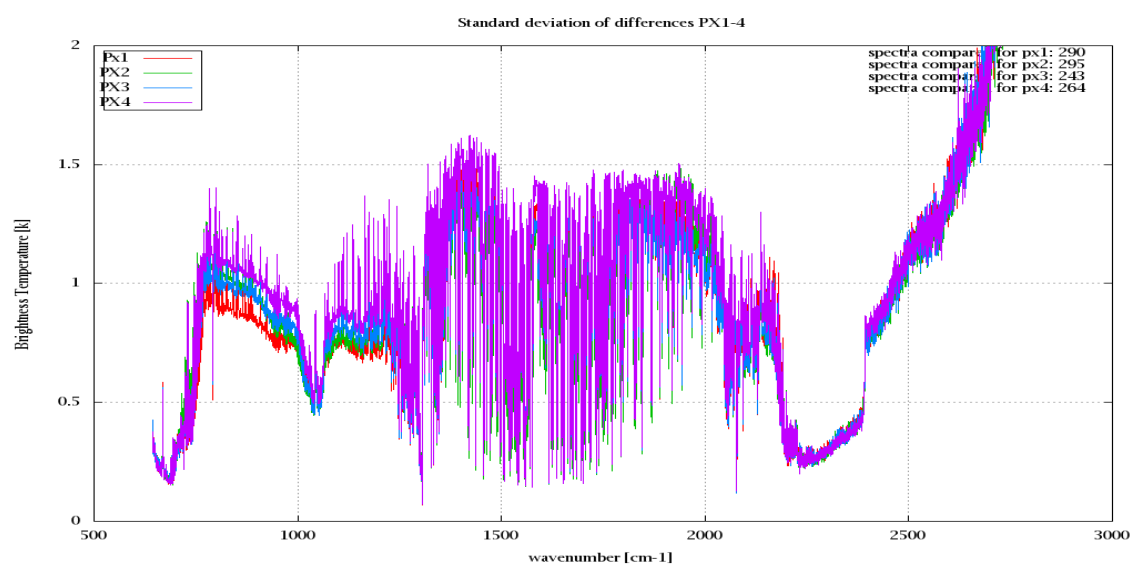


Figure 9: Standard Deviation of Radiance differences

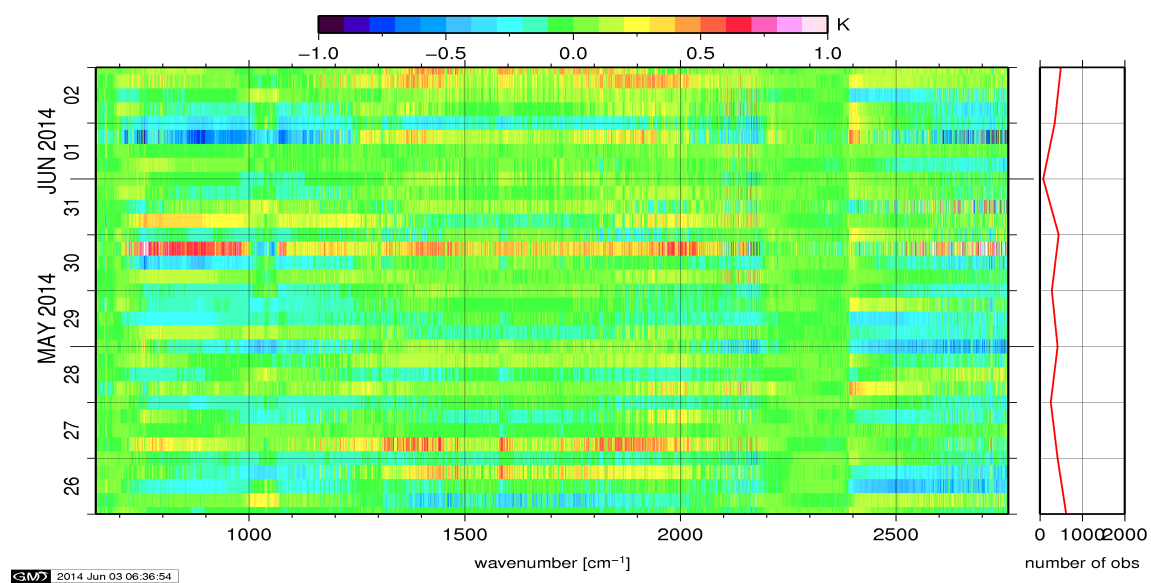


Figure 10: Radiance Anomaly in BRT: All Channels

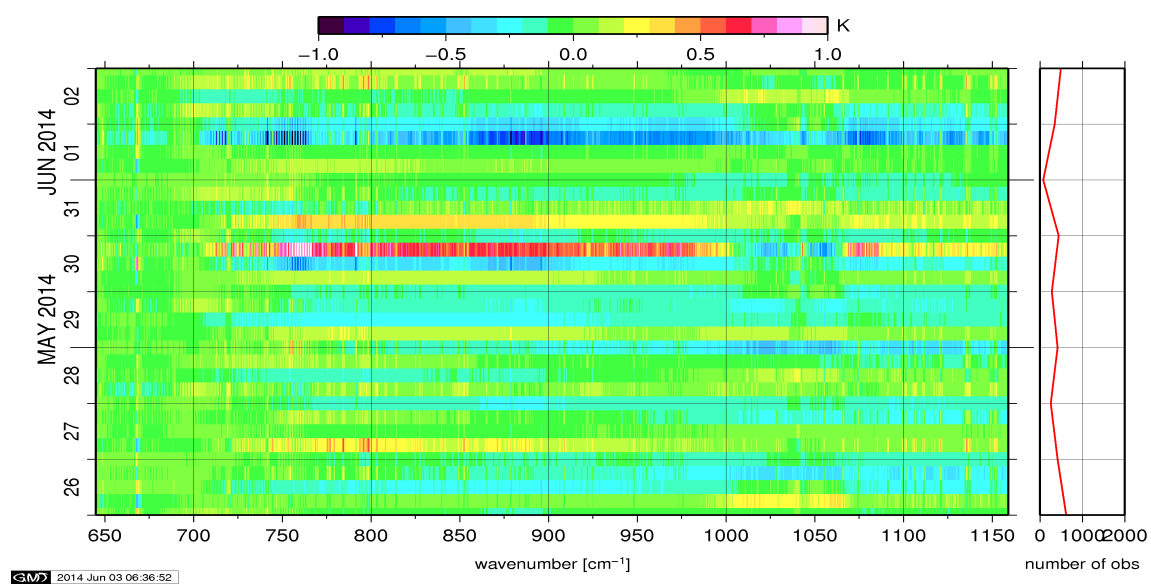


Figure 11: Radiance Anomaly in BRT: IASI Band 1

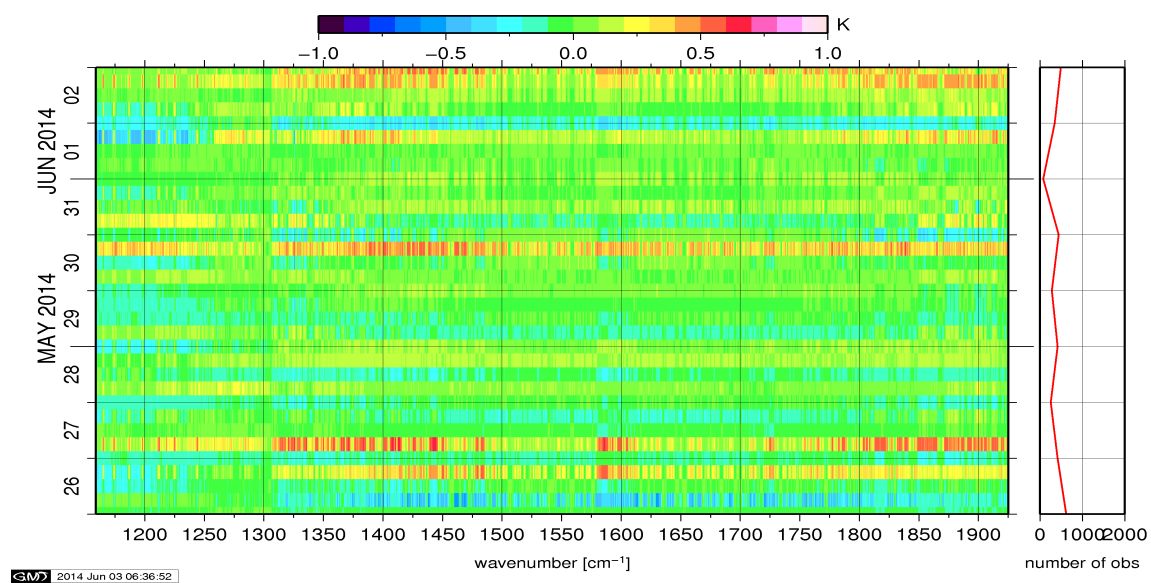


Figure 12: Radiance Anomaly in BRT: IASI Band 2

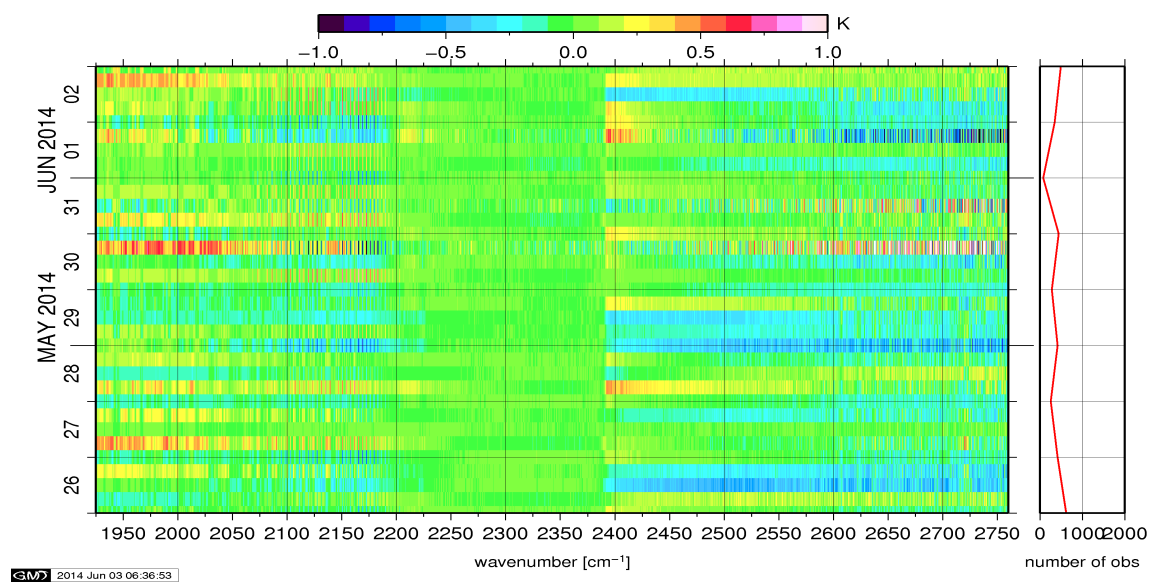


Figure 13: Radiance Anomaly in BRT: IASI Band 3

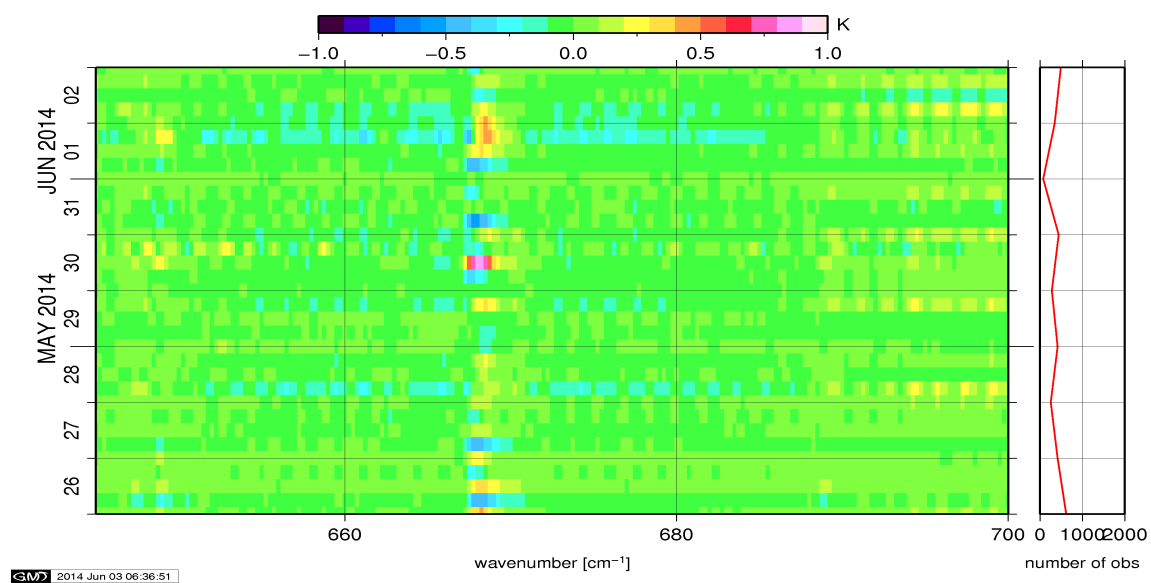


Figure 14: Radiance Anomaly in BRT: CO2 14

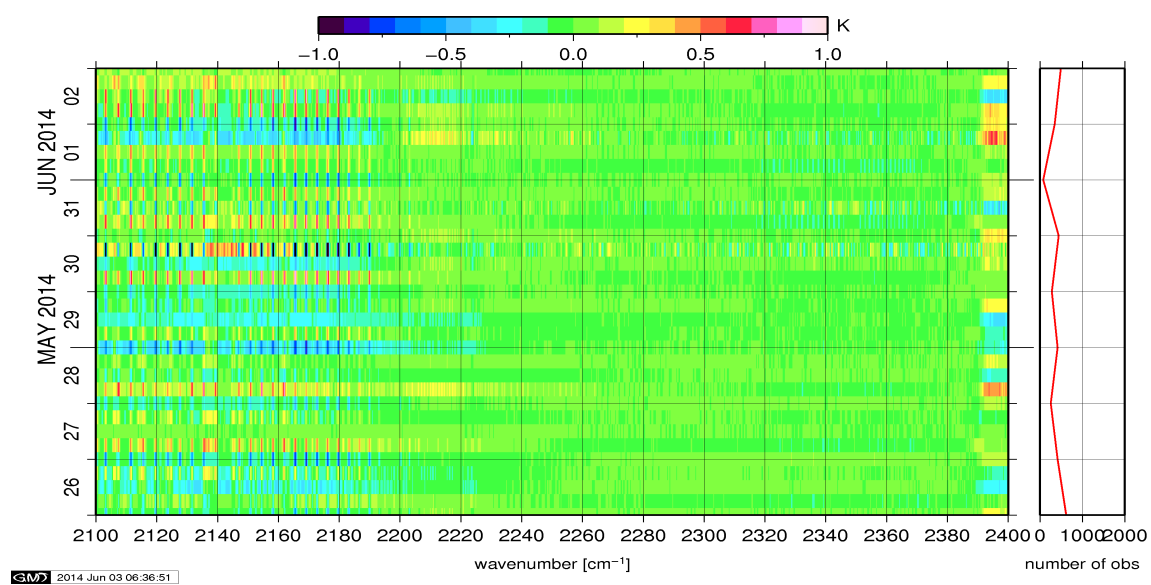


Figure 15: Radiance Anomaly in BRT: CO2 4.3

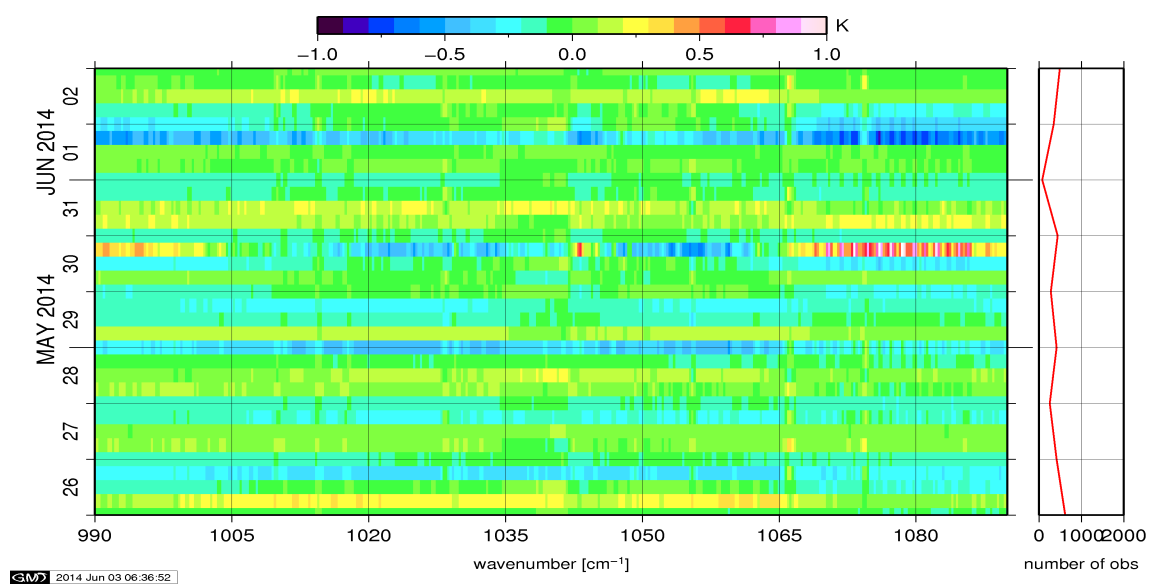


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

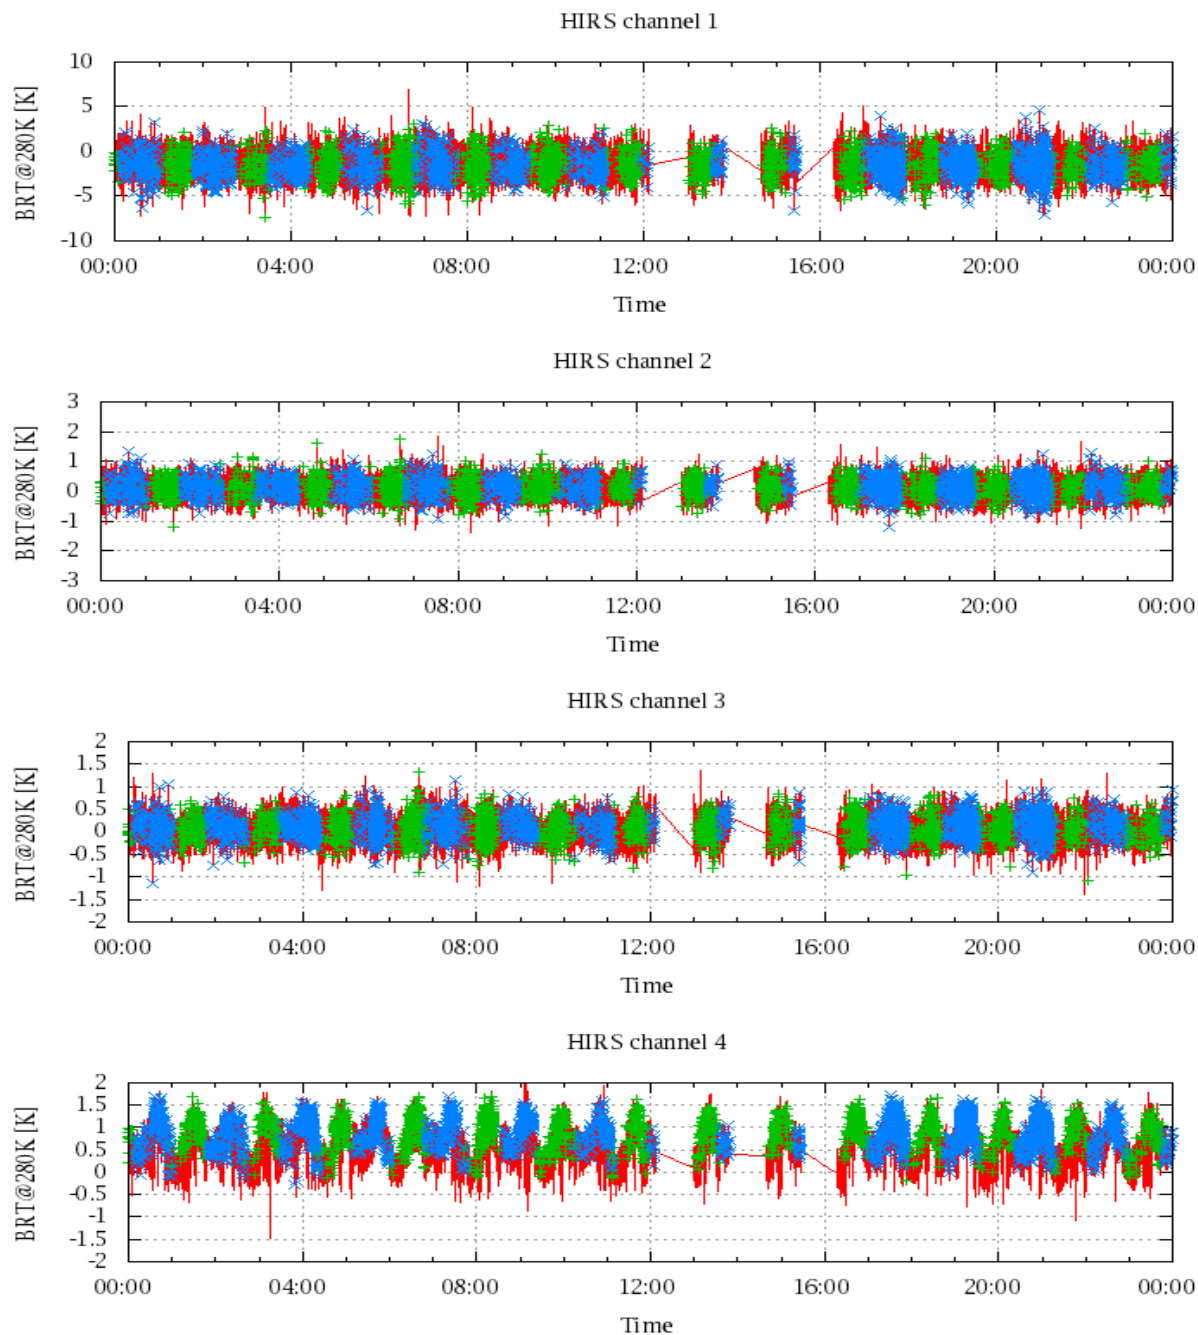


Figure 17: Radiance Differences in BRT

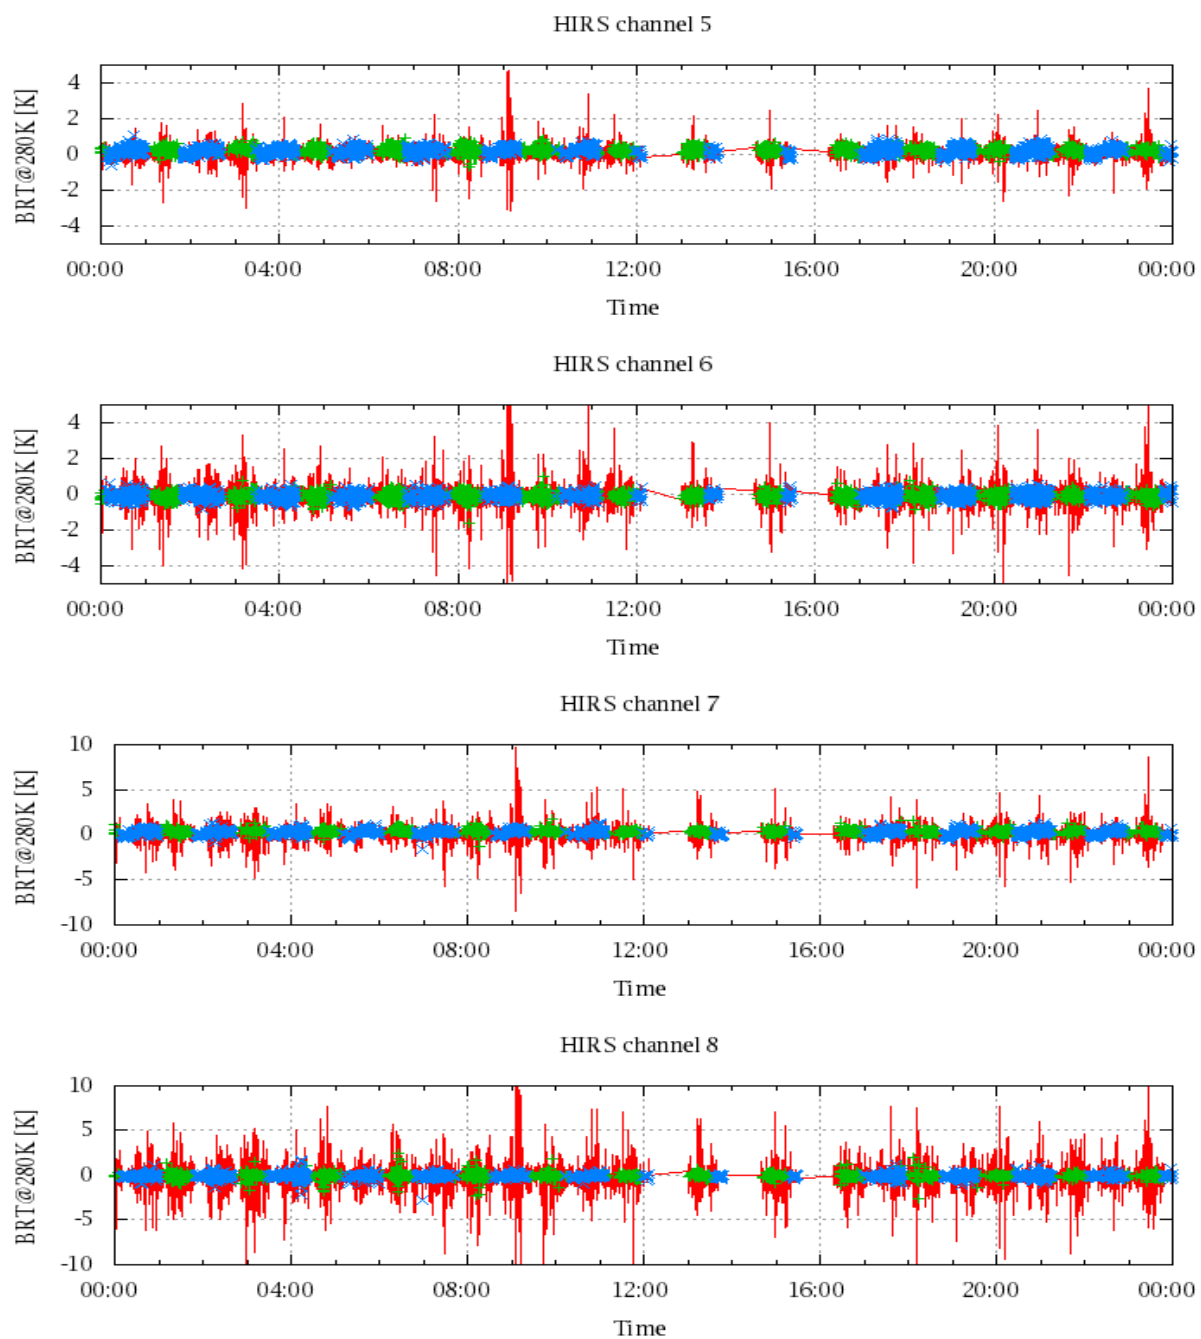


Figure 18: Radiance Differences in BRT

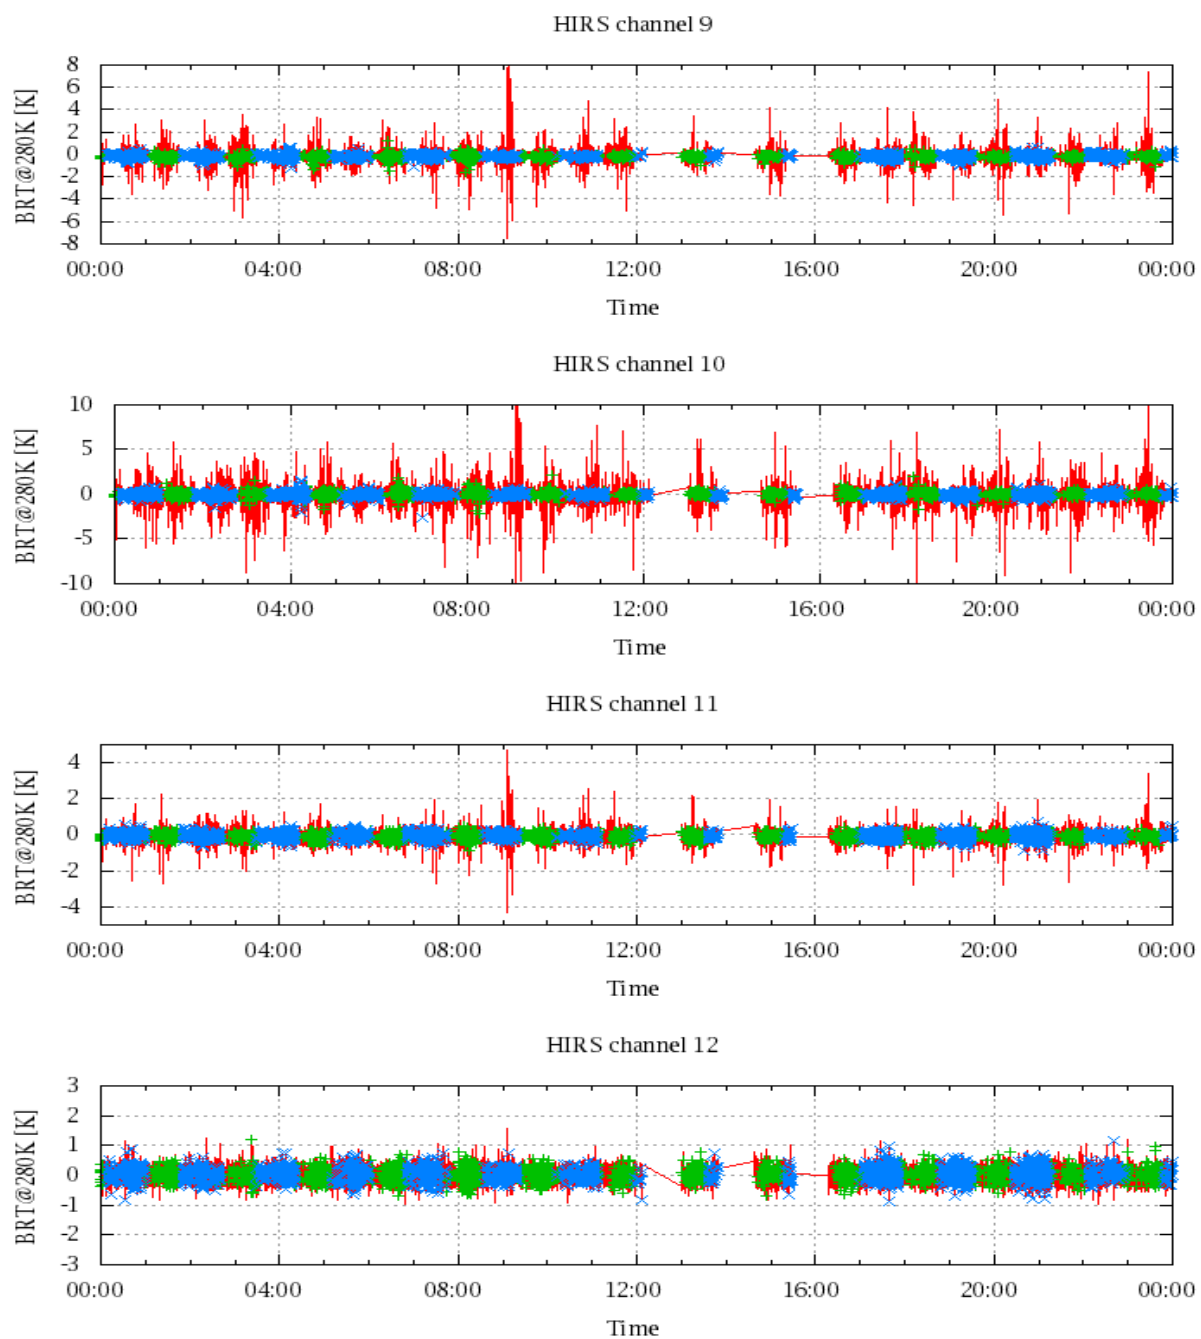


Figure 19: Radiance Differences in BRT

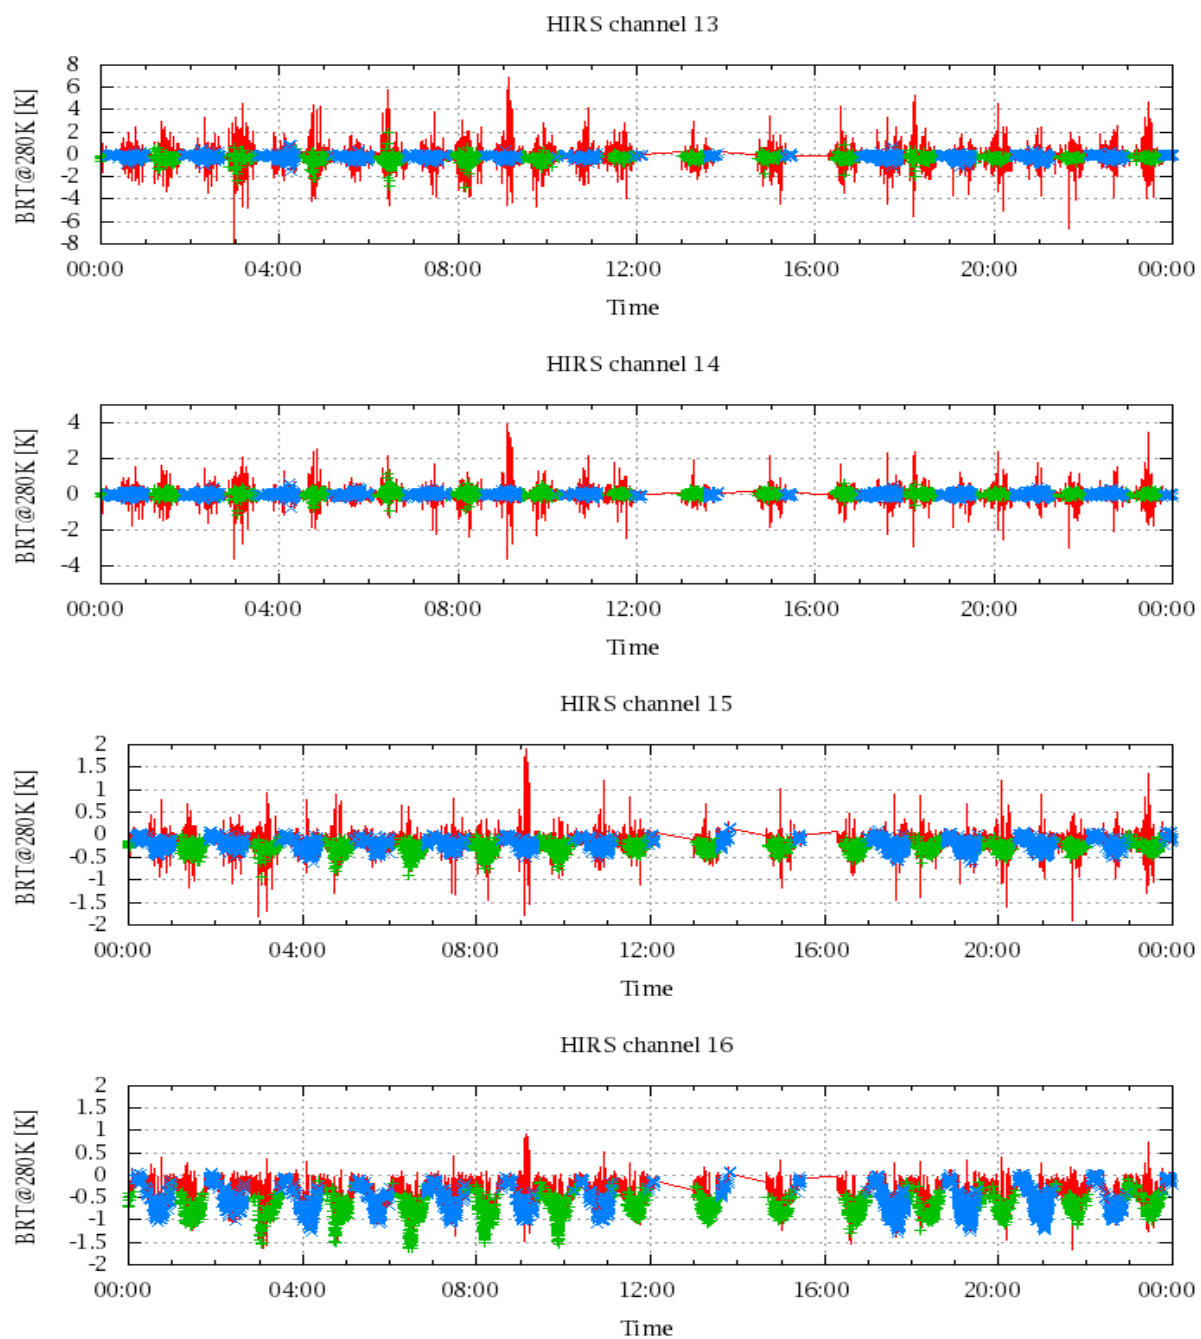


Figure 20: Radiance Differences in BRT

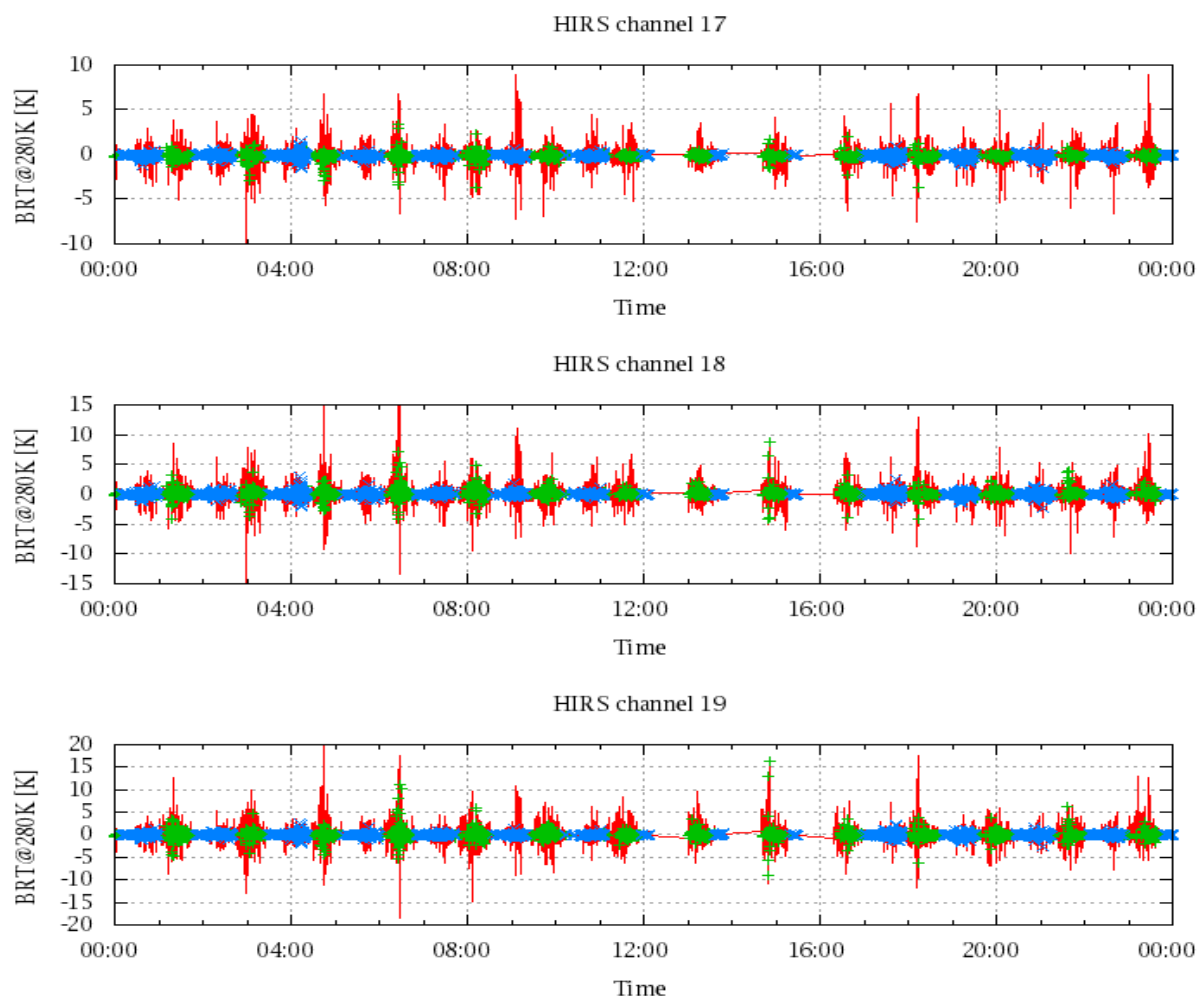


Figure 21: Radinace Differences in BRT