

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

05/06/2014 00:00:00 - 06/06/2014 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-B satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 05/06/2014 00:00:00 - 06/06/2014 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 05/06/2014 00:00:00 - 06/06/2014 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	480	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	4572	4575	20140605033234.720	20140605033235.369
PX1 (130)	4579	4586	20140605033236.232	20140605033237.748
PX1 (130)	4586	4590	20140605033237.748	20140605033240.123
PX2 (135)	4572	4575	20140605033234.720	20140605033235.369
PX2 (135)	4578	4586	20140605033236.017	20140605033237.748
PX2 (135)	4586	4590	20140605033237.748	20140605033240.123
PX3 (140)	4571	4575	20140605033234.502	20140605033235.369
PX3 (140)	4578	4586	20140605033236.017	20140605033237.748
PX3 (140)	4586	4590	20140605033237.748	20140605033240.123
PX4 (145)	4571	4575	20140605033234.502	20140605033235.369
PX4 (145)	4578	4586	20140605033236.017	20140605033237.748
PX4 (145)	4586	4589	20140605033237.748	20140605033239.908
IMG (150)	7259	7263	20140605033234.502	20140605033235.369
IMG (150)	7266	7281	20140605033236.017	20140605033239.908
VER (160)	11558	11562	20140605033221.748	20140605033229.744
VER (160)	11563	11569	20140605033229.744	20140605033245.744
AUX (180)	8863	8865	20140605033230.177	20140605033246.177

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
05/06/2014 00:00:03	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.52 %	-
GQisFlagQual set (PX2)	99.60 %	-
GQisFlagQual set (PX3)	99.62 %	-
GQisFlagQual set (PX4)	99.54 %	-
GQisFlagQual set (all)	99.57 %	-

Table 4: Quality flags

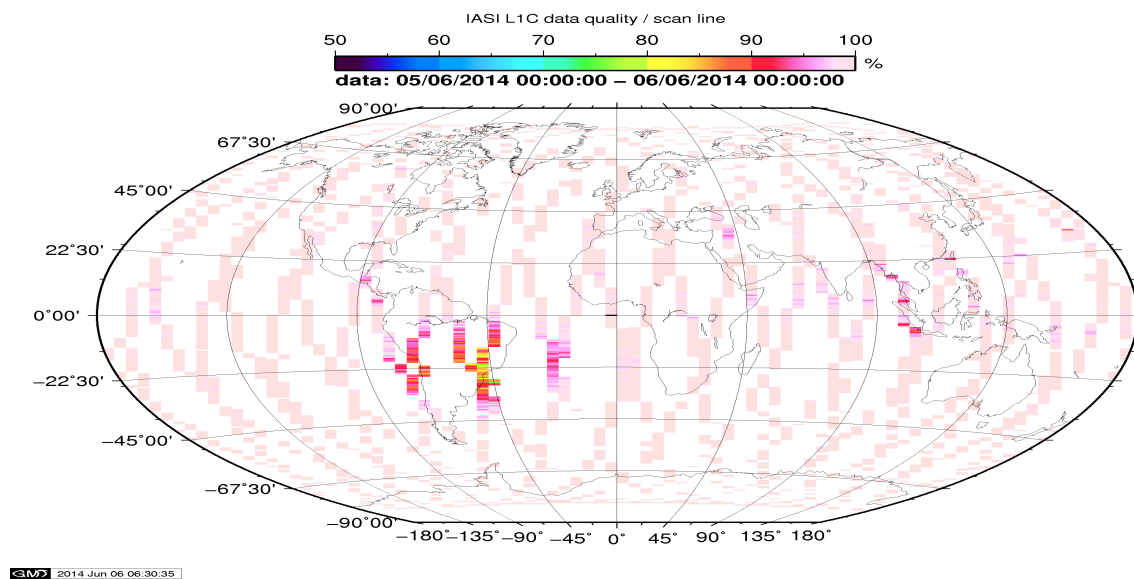


Figure 1: L1C data quality

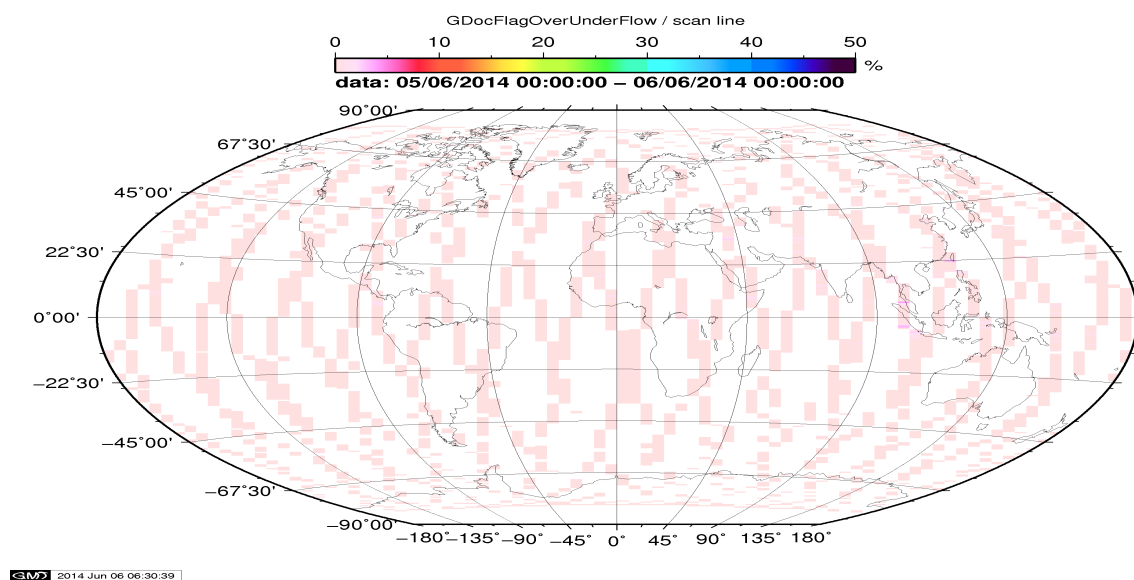


Figure 2: Flag of Over and Under Flows

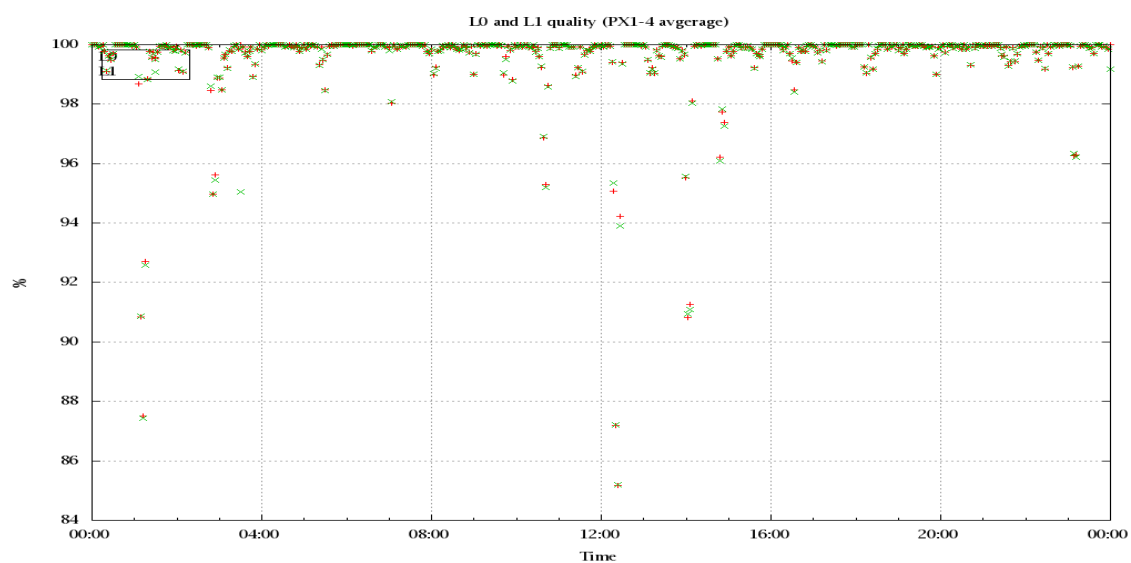


Figure 3: Level 0 and 1C overall quality

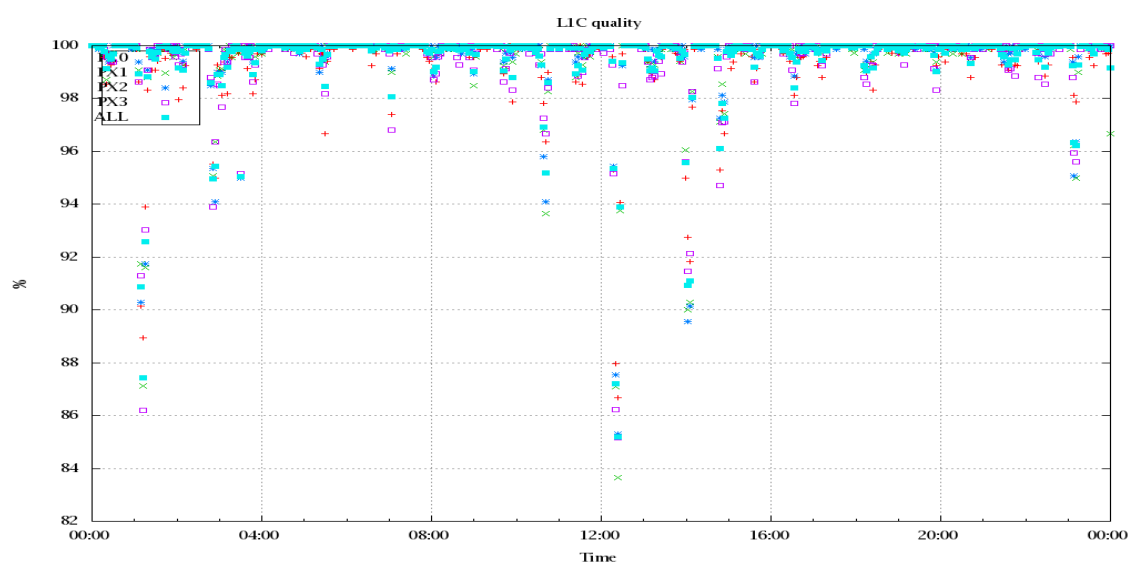


Figure 4: Level 1C quality

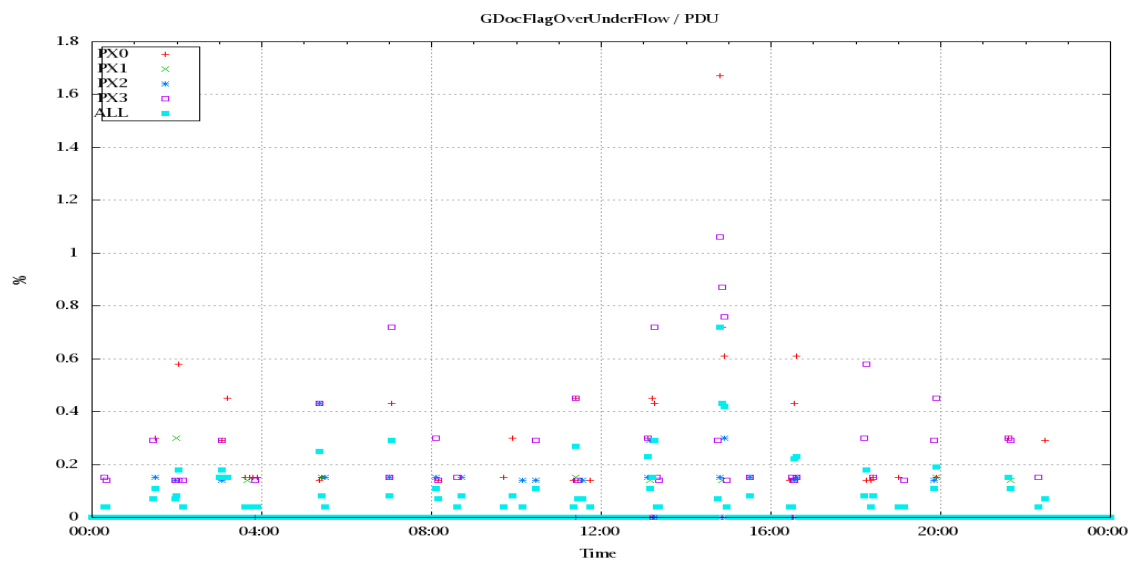


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

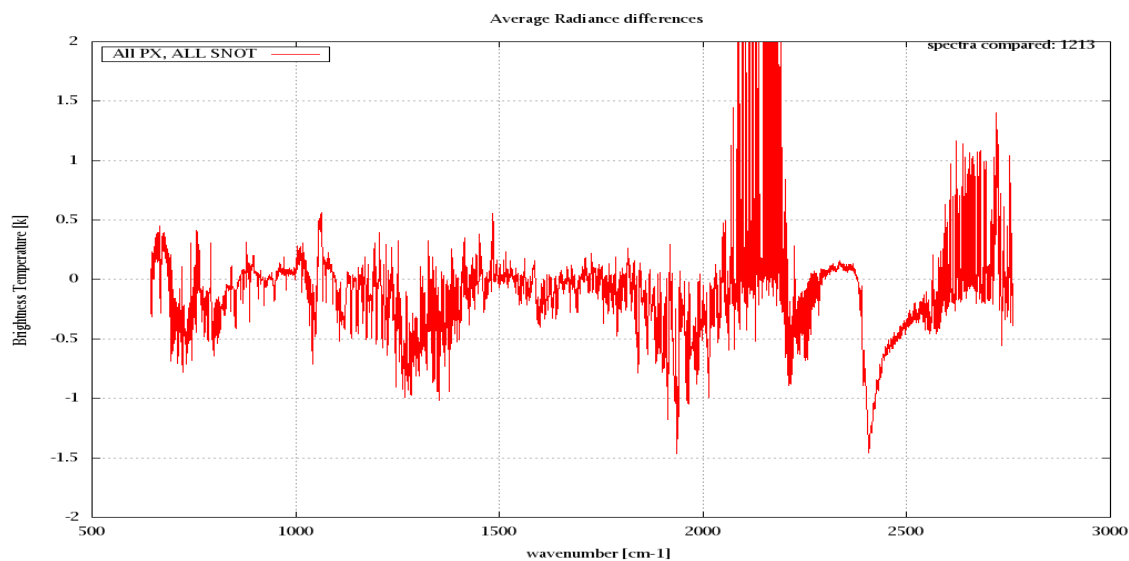


Figure 6: Average Radiance differences: OBS-CAL

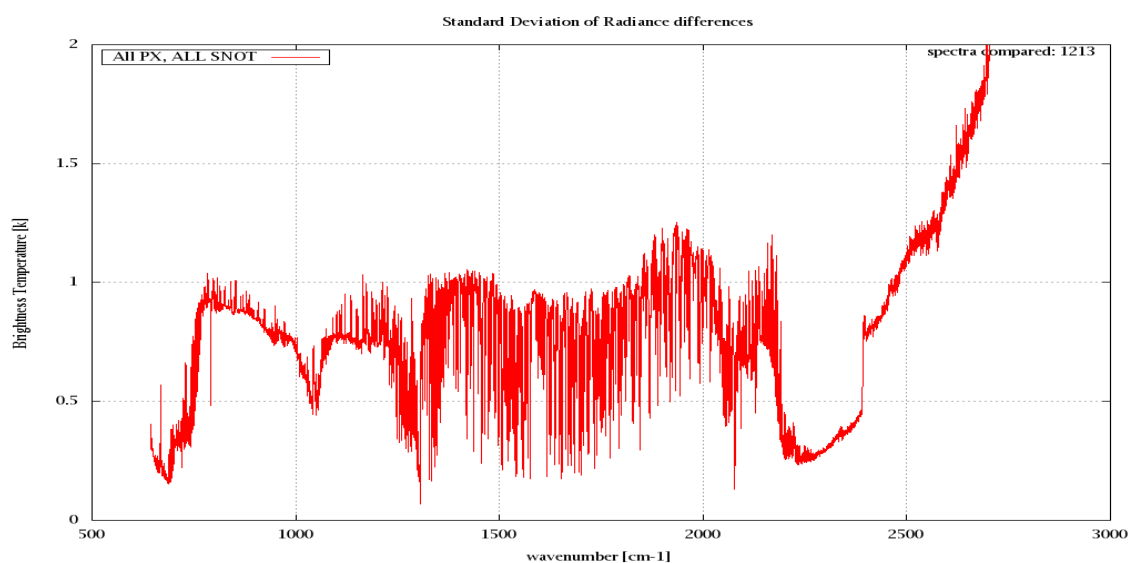


Figure 7: Standard Deviation of Radiance differences

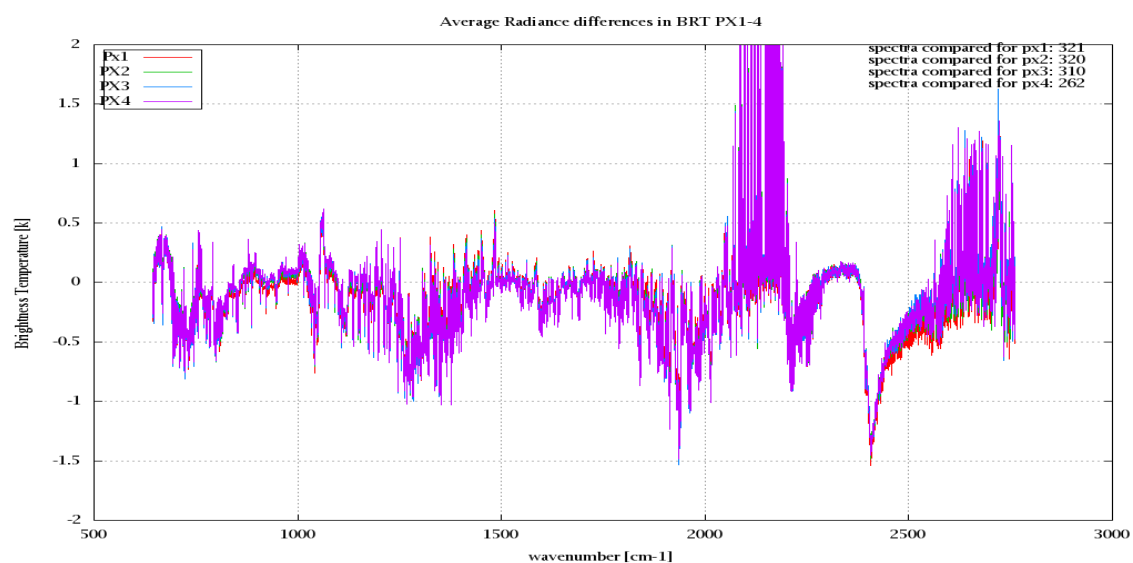


Figure 8: Average Radiance differences: OBS-CAL

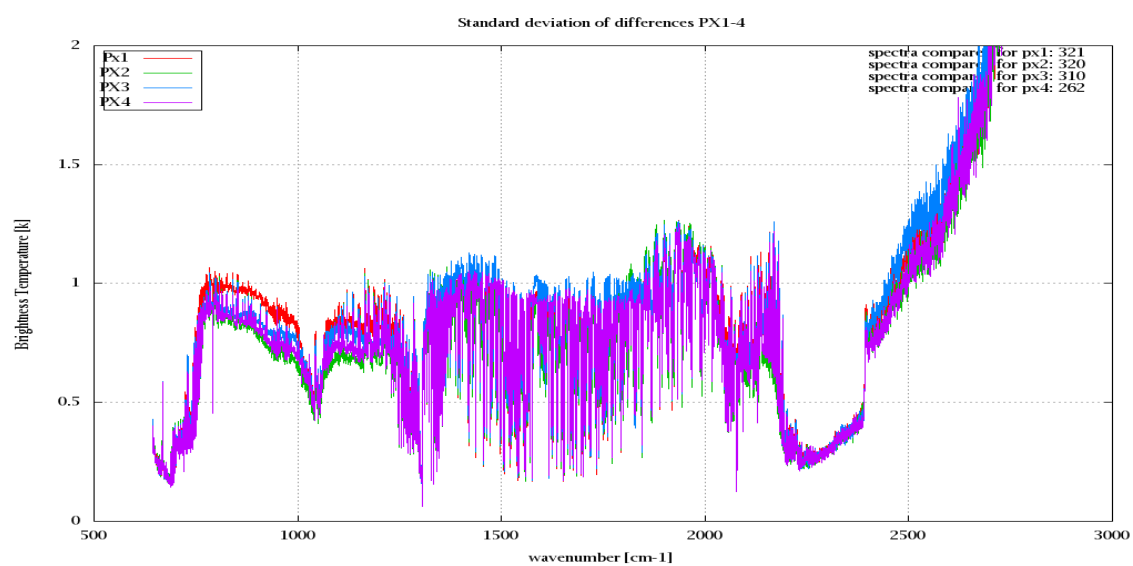


Figure 9: Standard Deviation of Radiance differences

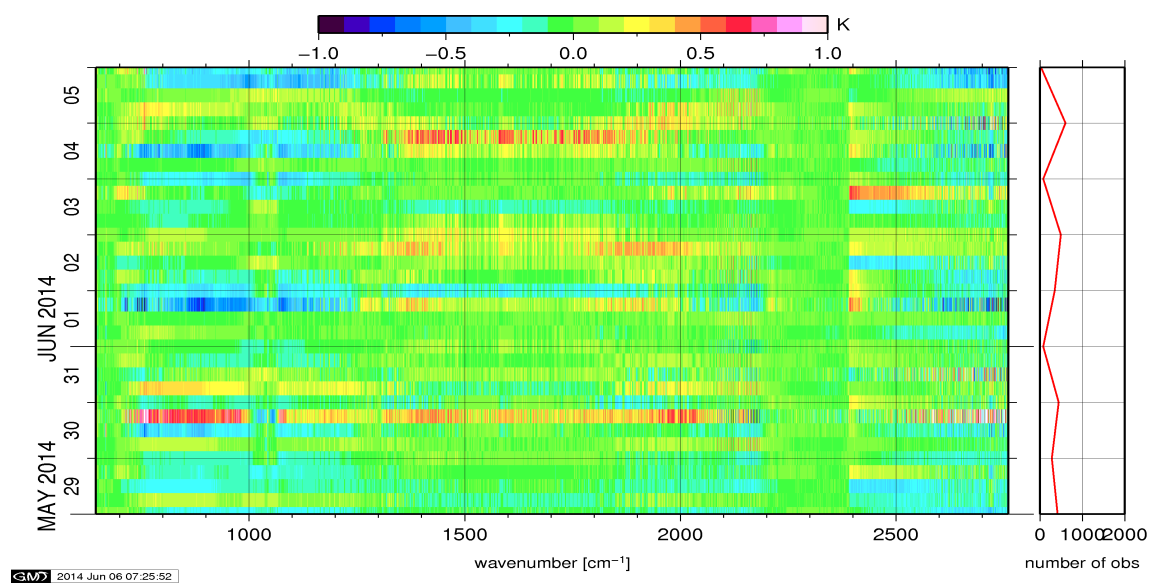


Figure 10: Radiance Anomaly in BRT: All Channels

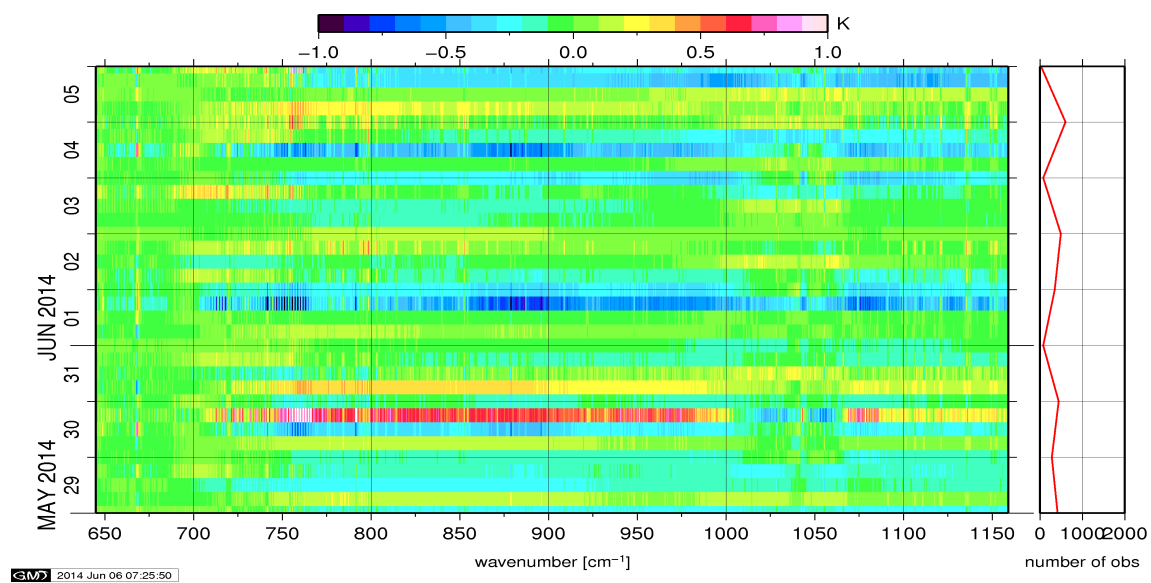


Figure 11: Radiance Anomaly in BRT: IASI Band 1

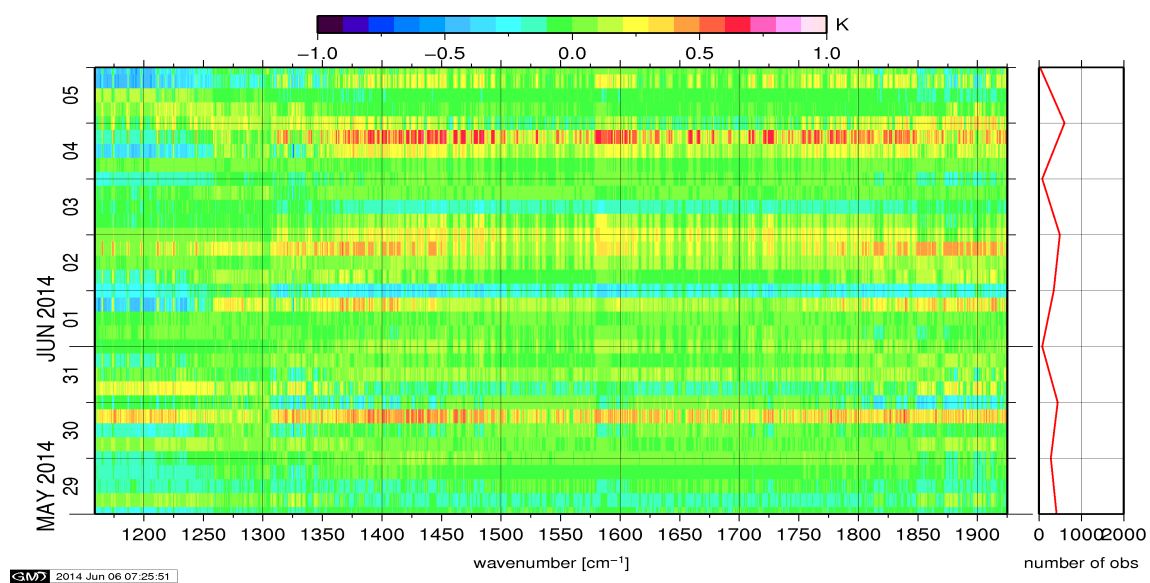


Figure 12: Radiance Anomaly in BRT: IASI Band 2

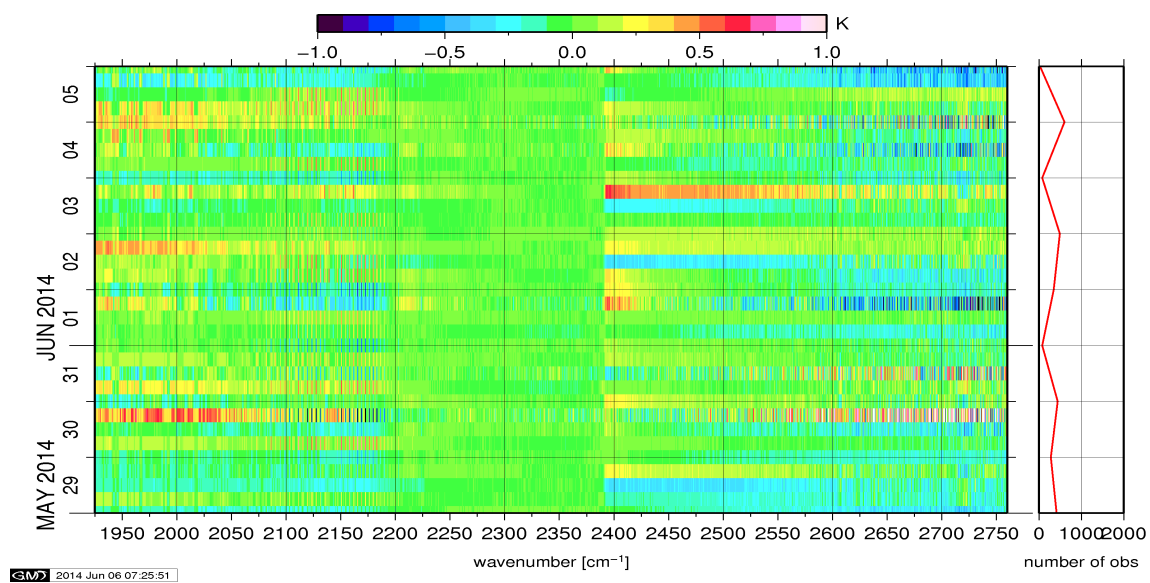


Figure 13: Radiance Anomaly in BRT: IASI Band 3

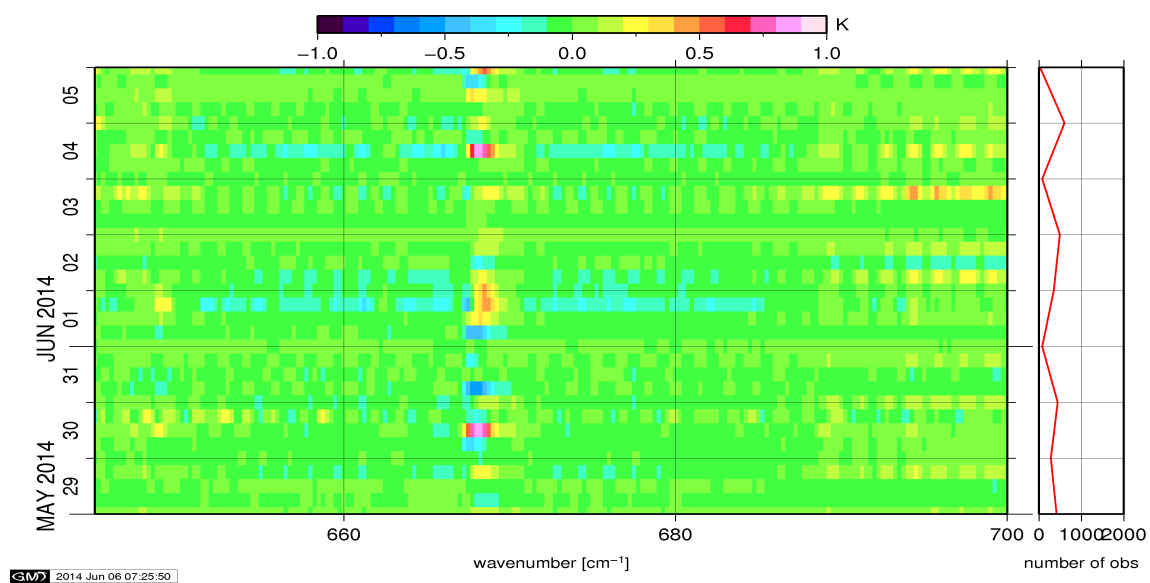


Figure 14: Radiance Anomaly in BRT: CO2 14

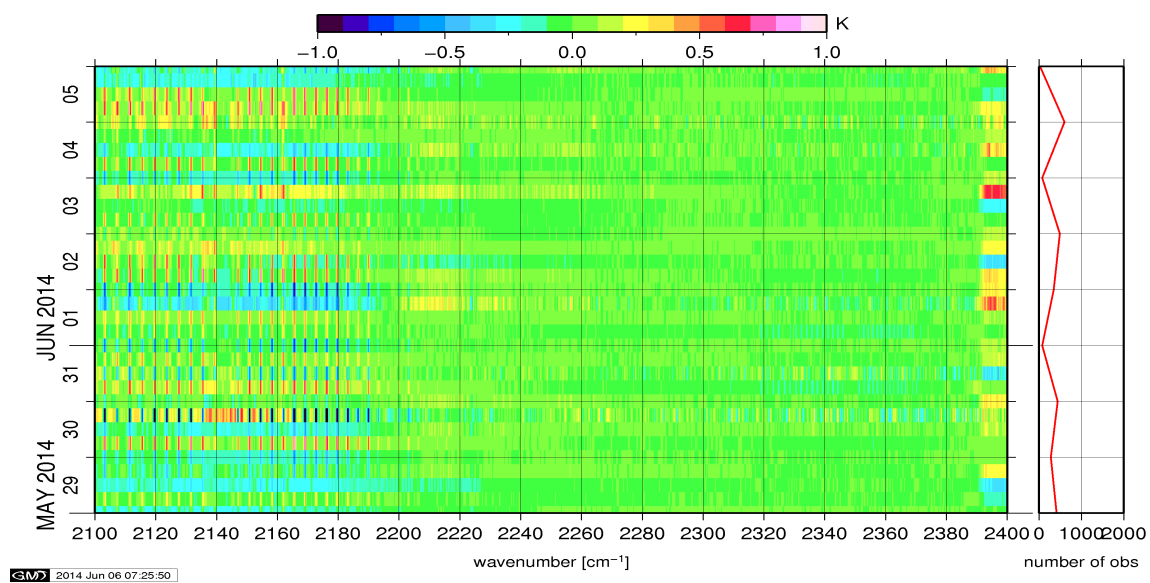


Figure 15: Radiance Anomaly in BRT: CO2 4.3

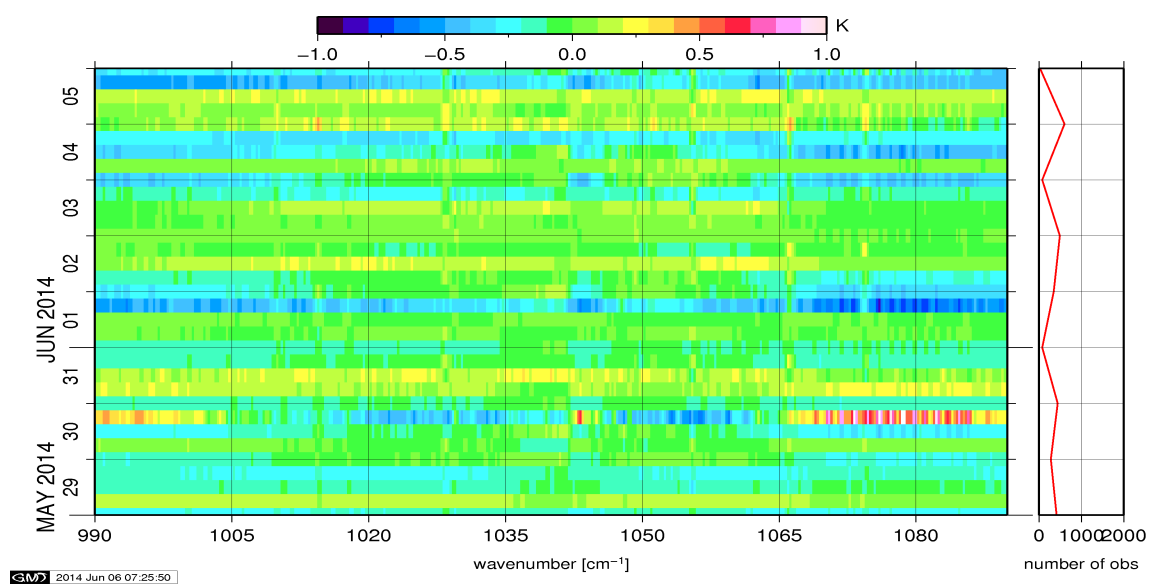


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

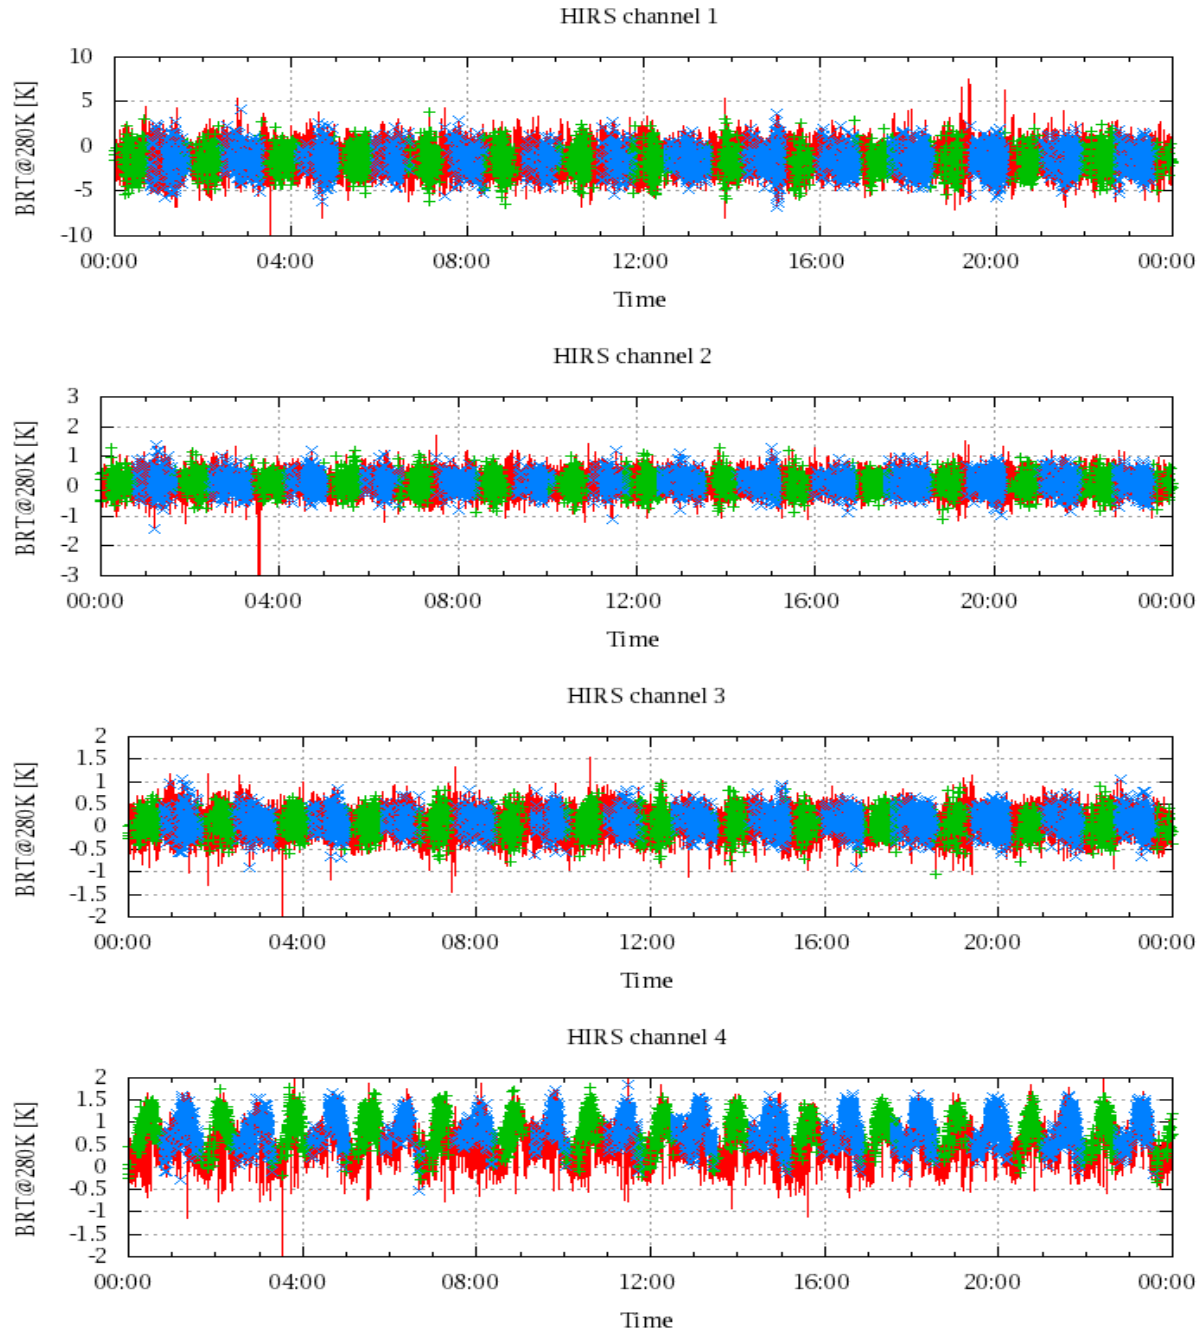


Figure 17: Radiance Differences in BRT

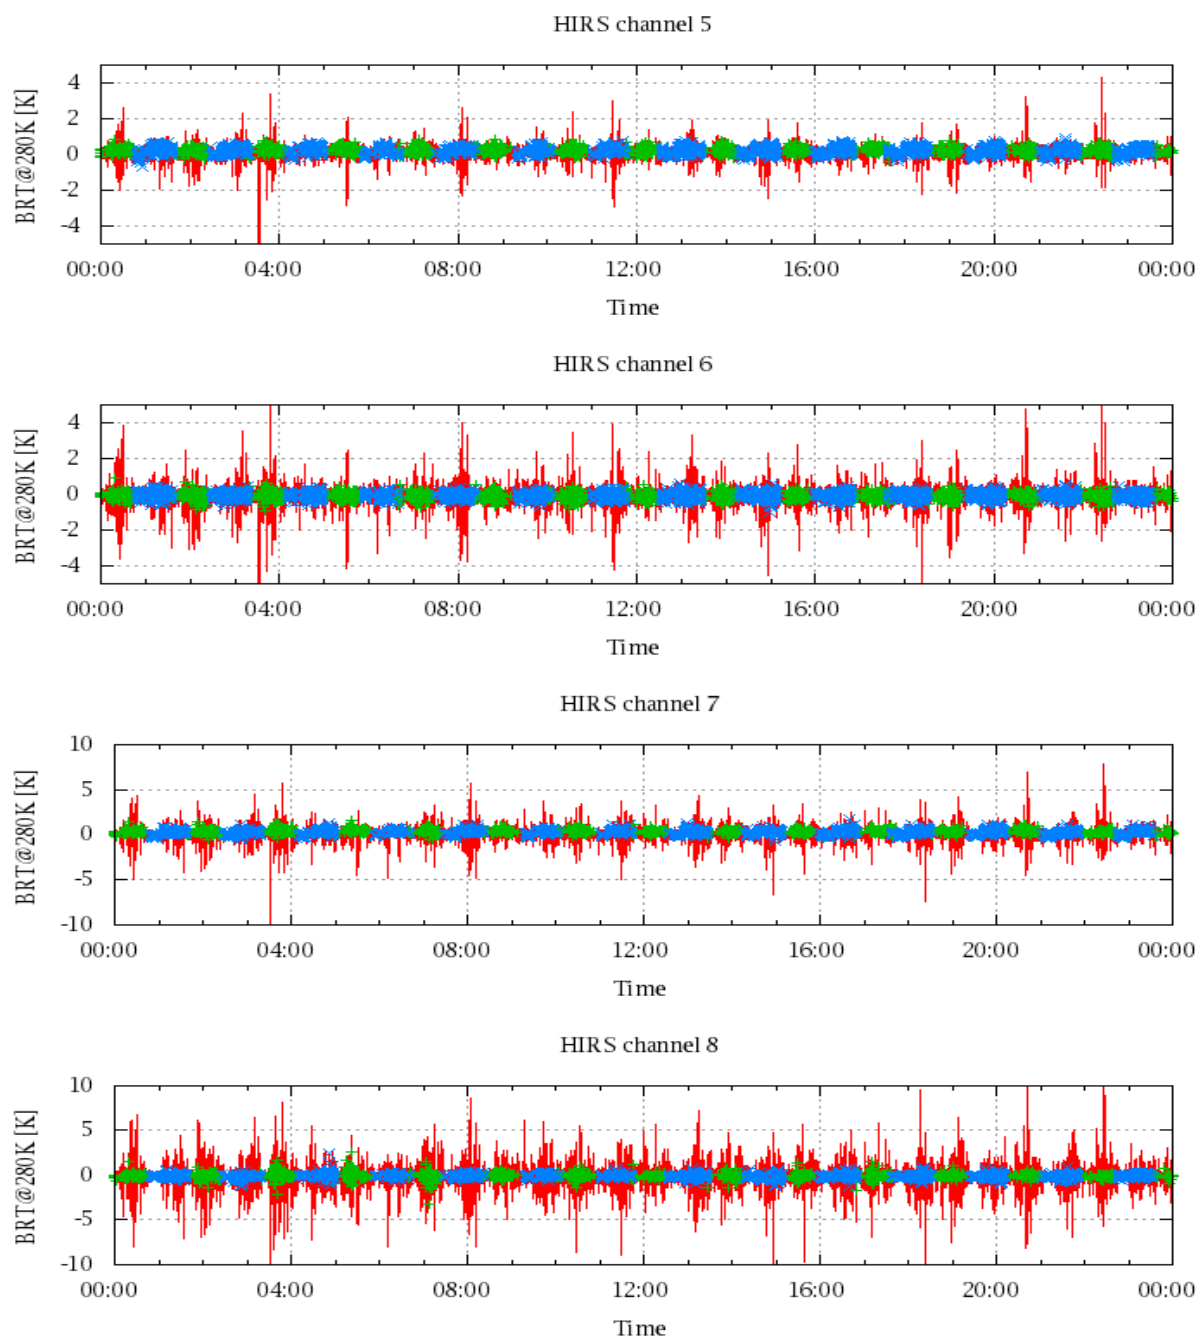


Figure 18: Radiance Differences in BRT

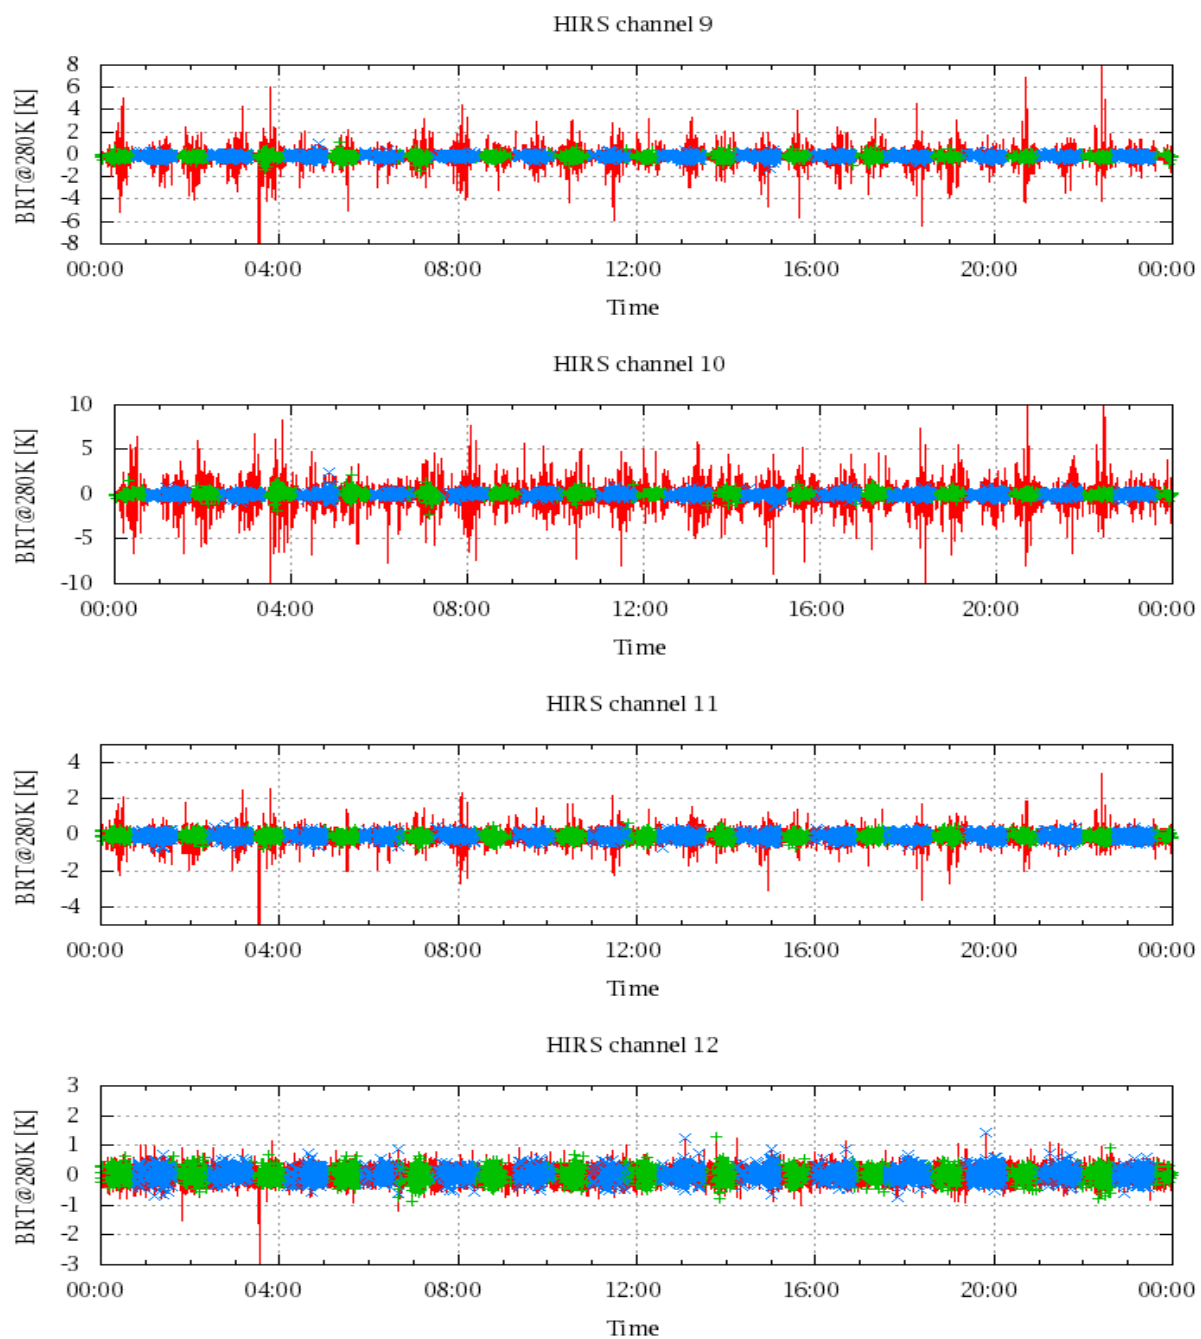


Figure 19: Radiance Differences in BRT

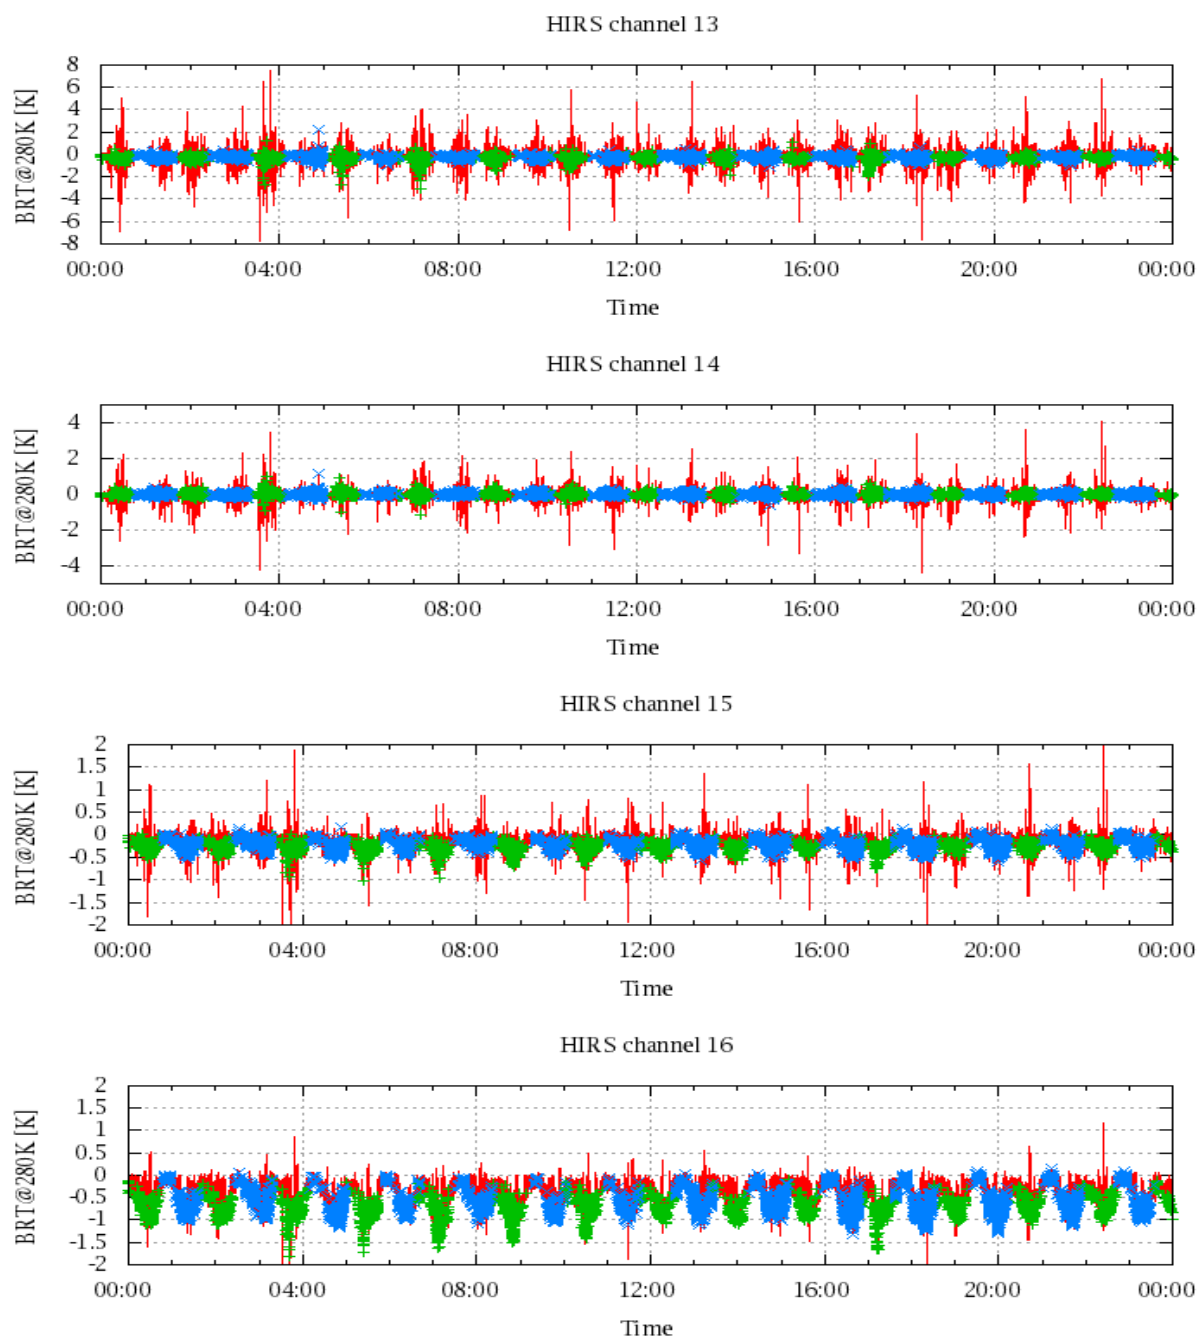


Figure 20: Radiance Differences in BRT

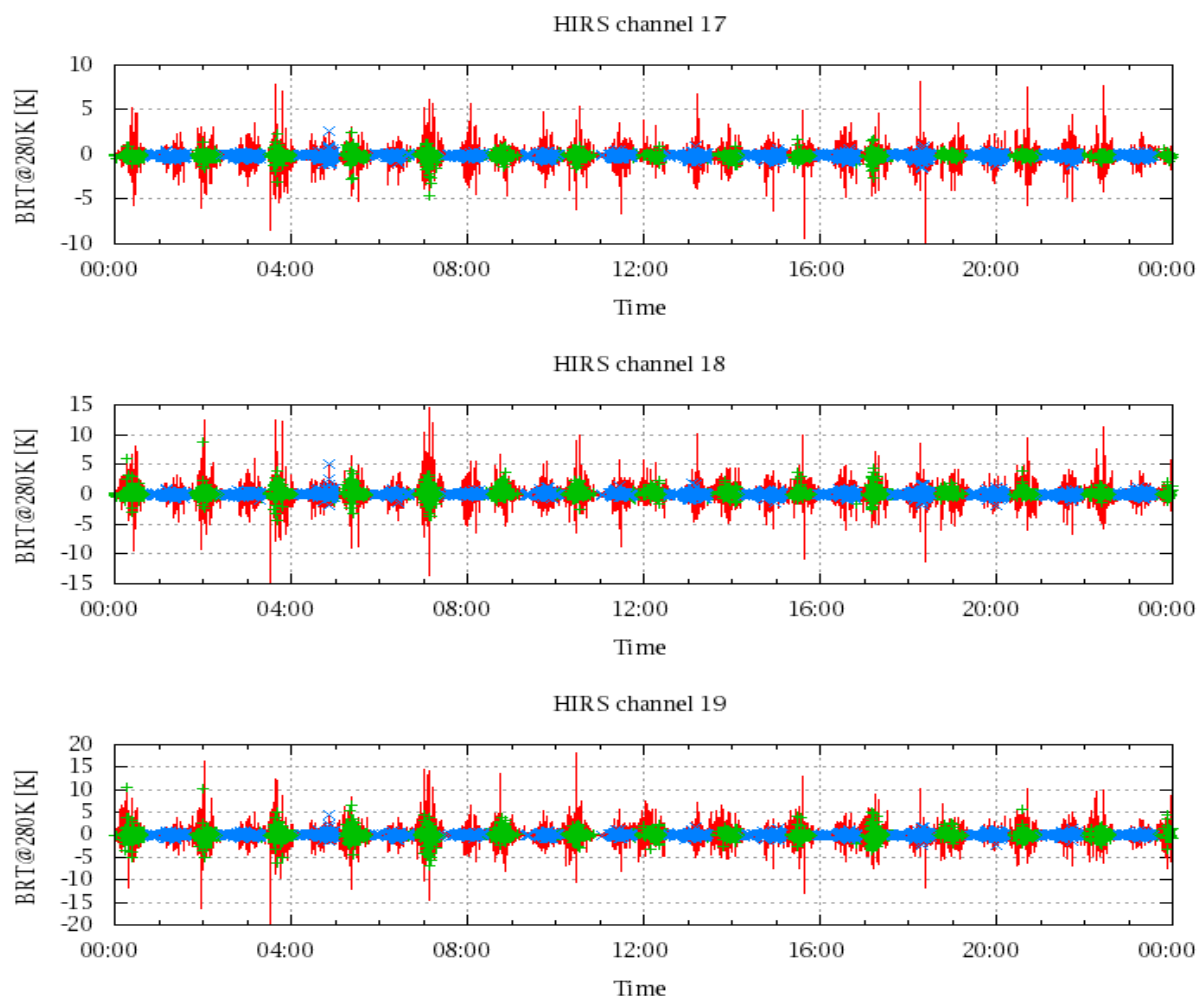


Figure 21: Radinace Differences in BRT