

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

01/10/2011 00:00:00 - 02/10/2011 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-A satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 01/10/2011 00:00:00 - 02/10/2011 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 01/10/2011 00:00:00 - 02/10/2011 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	480	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	9371	9387	20111001014620.747	20111001014624.208
PX1 (130)	9388	9399	20111001014624.426	20111001014628.317
PX1 (130)	4802	4808	20111001171239.425	20111001171240.726
PX1 (130)	4839	4866	20111001171248.941	20111001171256.293
PX2 (135)	9371	9387	20111001014620.747	20111001014624.208
PX2 (135)	9388	9399	20111001014624.426	20111001014628.317
PX2 (135)	4802	4808	20111001171239.425	20111001171240.726
PX2 (135)	4839	4866	20111001171248.941	20111001171256.293
PX3 (140)	9370	9386	20111001014620.532	20111001014623.993
PX3 (140)	9388	9399	20111001014624.426	20111001014628.317
PX3 (140)	4802	4808	20111001171239.425	20111001171240.726
PX3 (140)	4839	4866	20111001171248.941	20111001171256.293
PX4 (145)	9370	9386	20111001014620.532	20111001014623.993
PX4 (145)	9388	9399	20111001014624.426	20111001014628.317
PX4 (145)	4802	4807	20111001171239.425	20111001171240.507
PX4 (145)	4839	4866	20111001171248.941	20111001171256.293
IMG (150)	2146	2162	20111001014620.532	20111001014623.993
IMG (150)	2164	2179	20111001014624.426	20111001014628.317

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
IMG (150)	8981	8987	20111001171239.211	20111001171240.507
IMG (150)	9022	9054	20111001171248.726	20111001171256.293
VER (160)	7399	7405	20111001014617.723	20111001014633.719
VER (160)	9371	9377	20111001171241.589	20111001171257.589
AUX (180)	14577	14579	20111001014618.153	20111001014634.153
AUX (180)	5141	5143	20111001171242.023	20111001171258.023

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
01/10/2011 00:00:13	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.34 %	-
GQisFlagQual set (PX2)	99.18 %	-
GQisFlagQual set (PX3)	99.29 %	-
GQisFlagQual set (PX4)	99.36 %	-
GQisFlagQual set (all)	99.29 %	-

Table 4: Quality flags

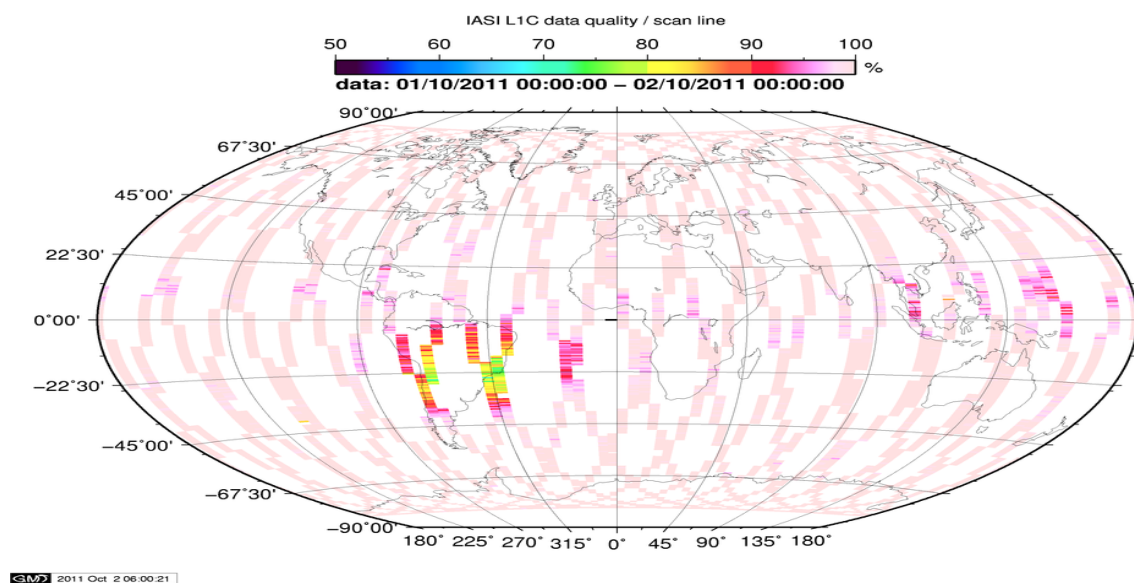


Figure 1: L1C data quality

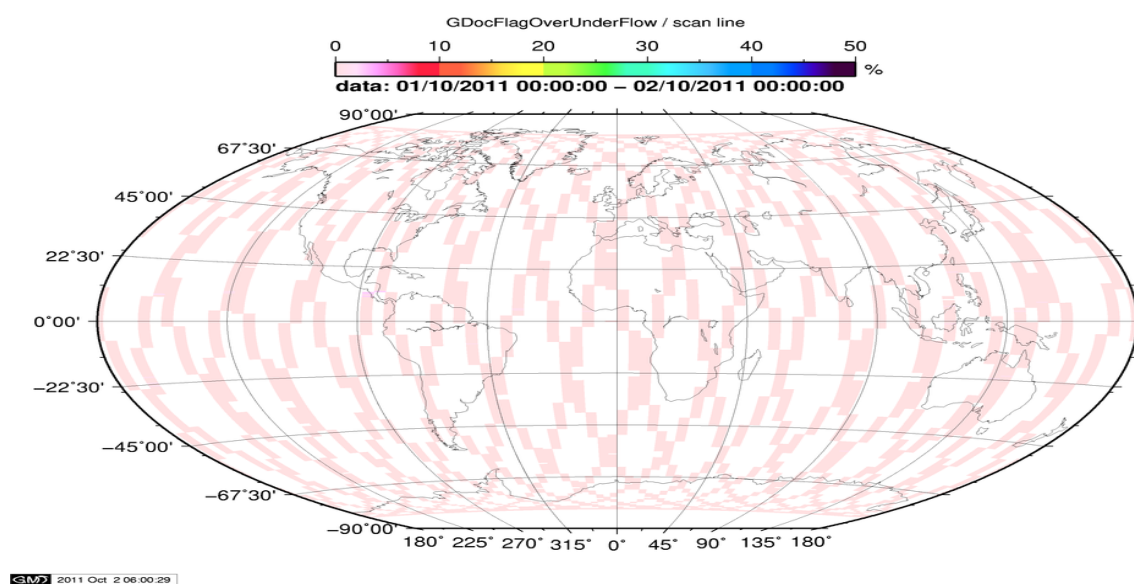


Figure 2: Flag of Over and Under Flows

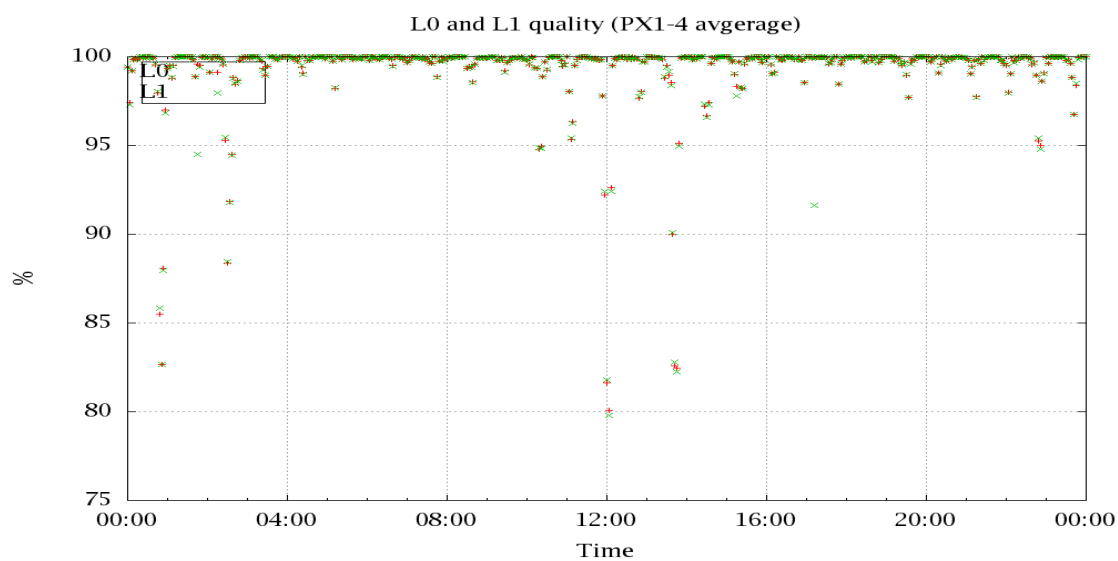


Figure 3: Level 0 and 1C overall quality

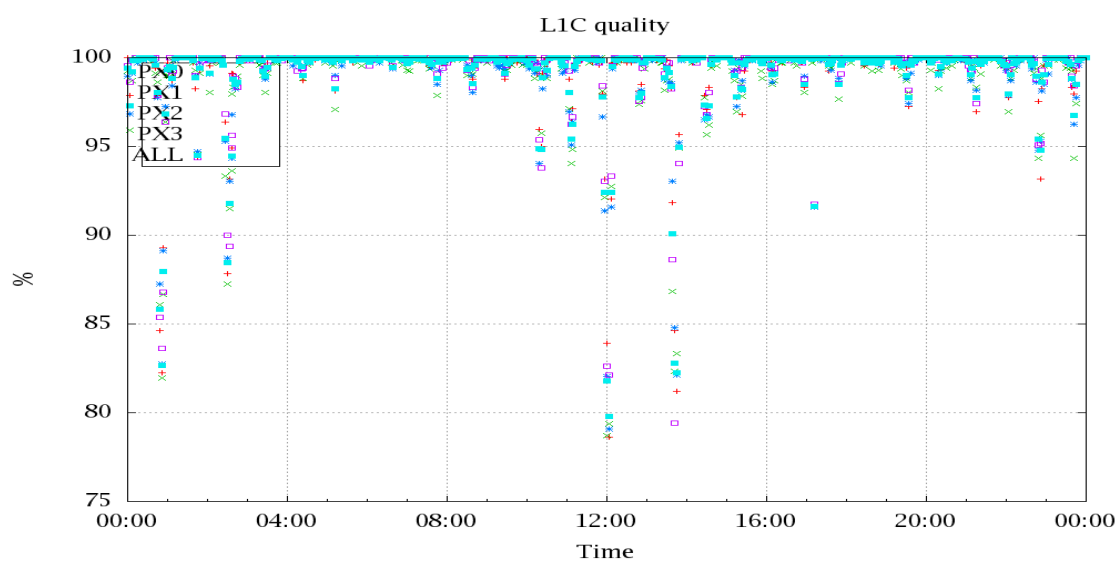


Figure 4: Level 1C quality

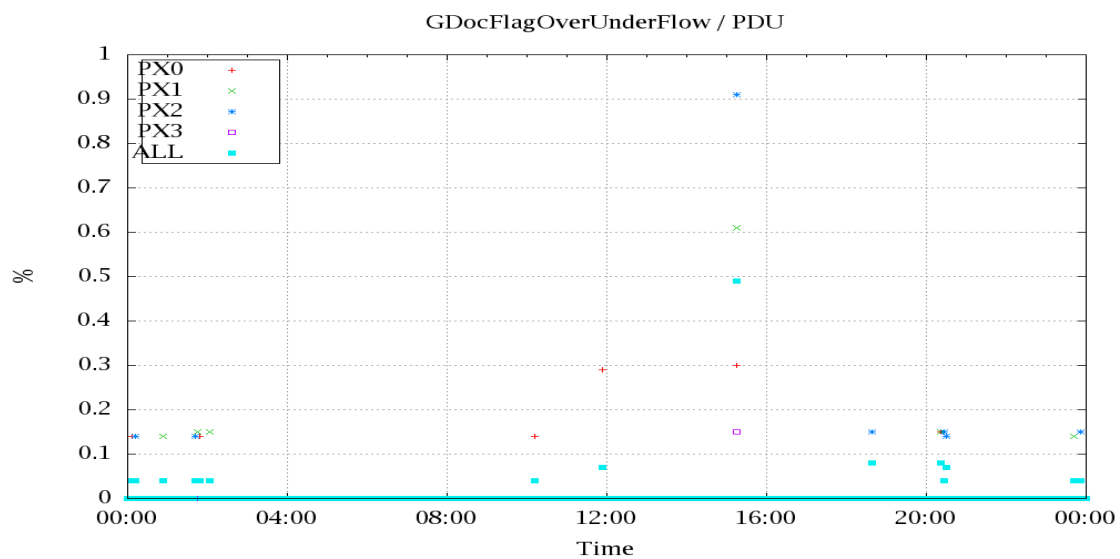


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

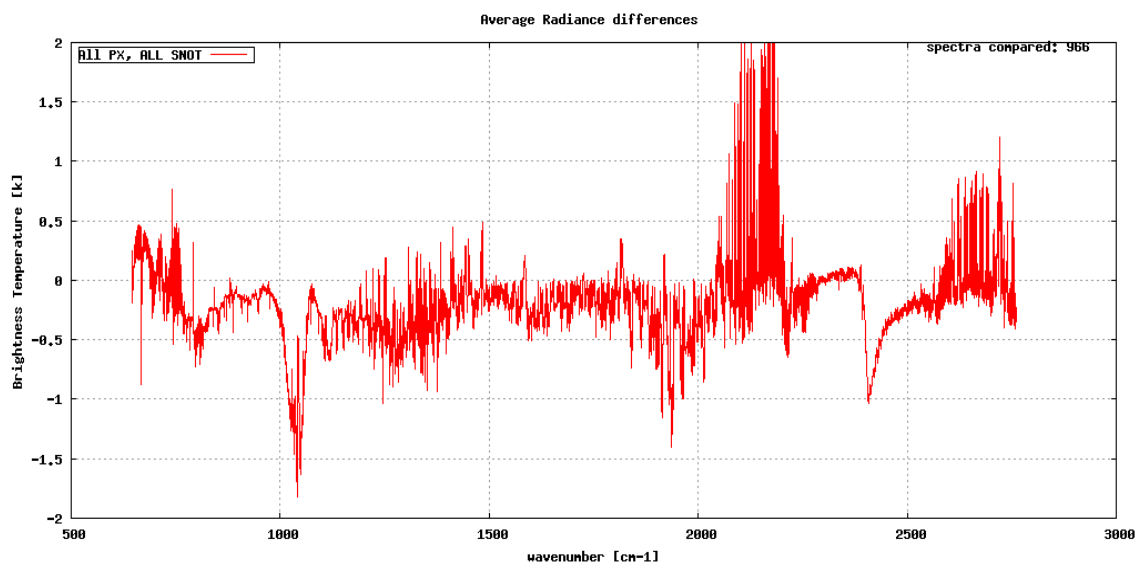


Figure 6: Average Radiance differences: OBS-CAL

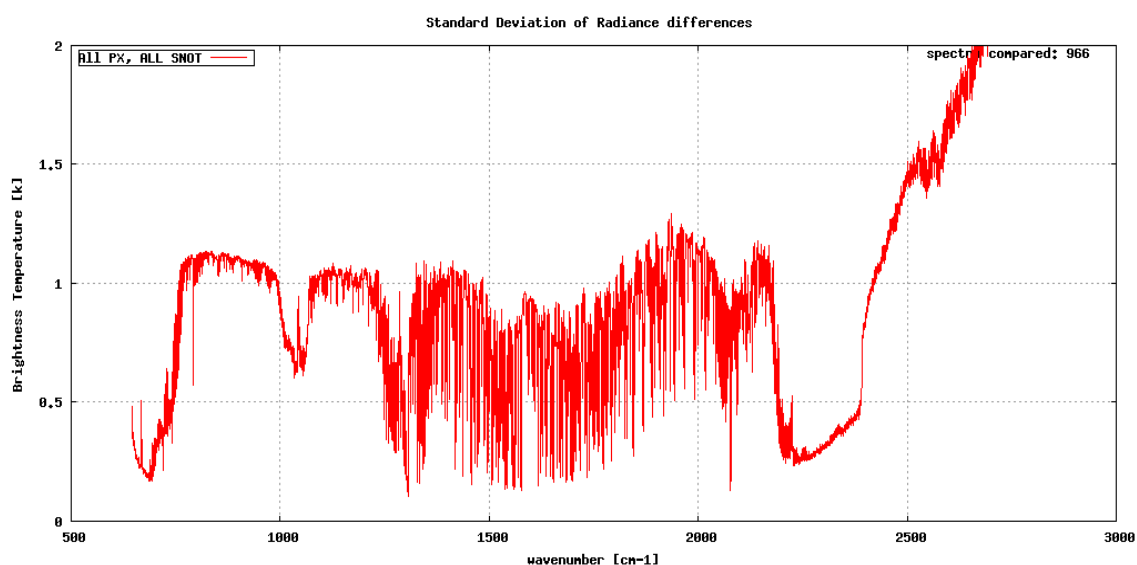


Figure 7: Standard Deviation of Radiance differences

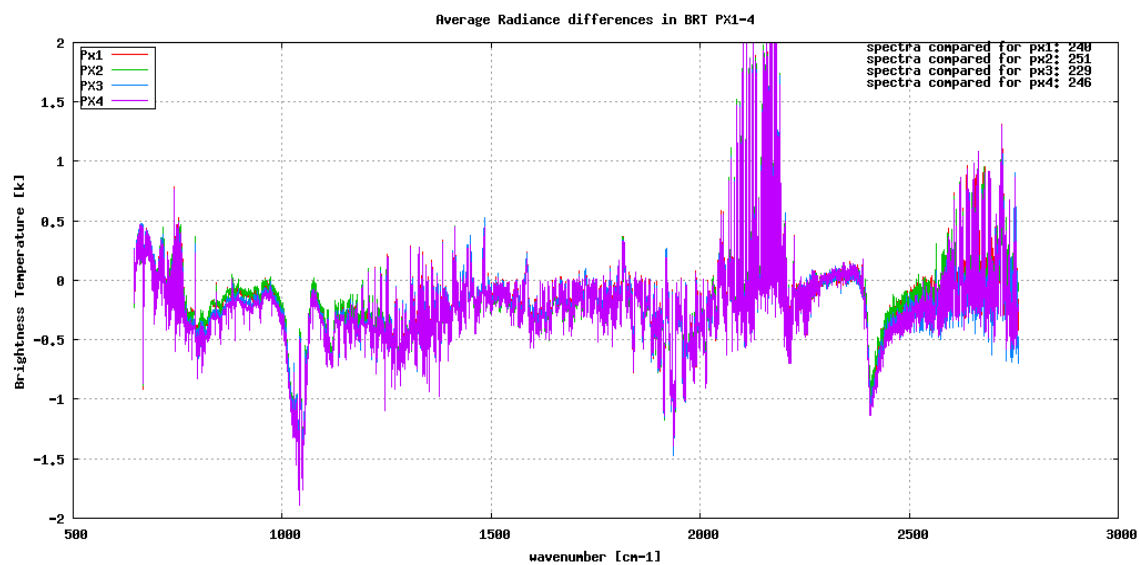


Figure 8: Average Radiance differences: OBS-CAL

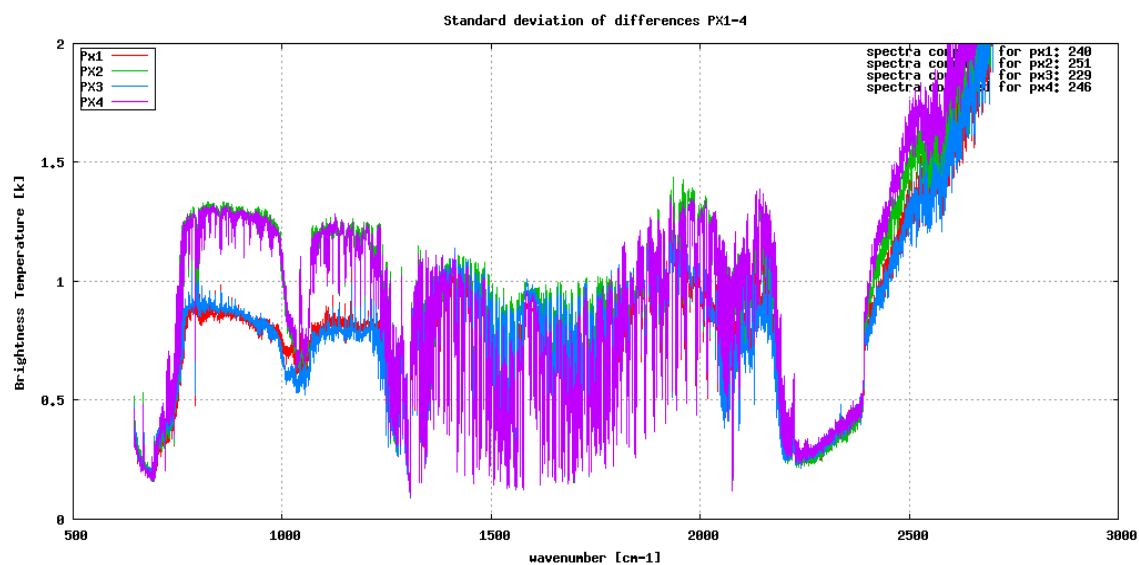


Figure 9: Standard Deviation of Radiance differences

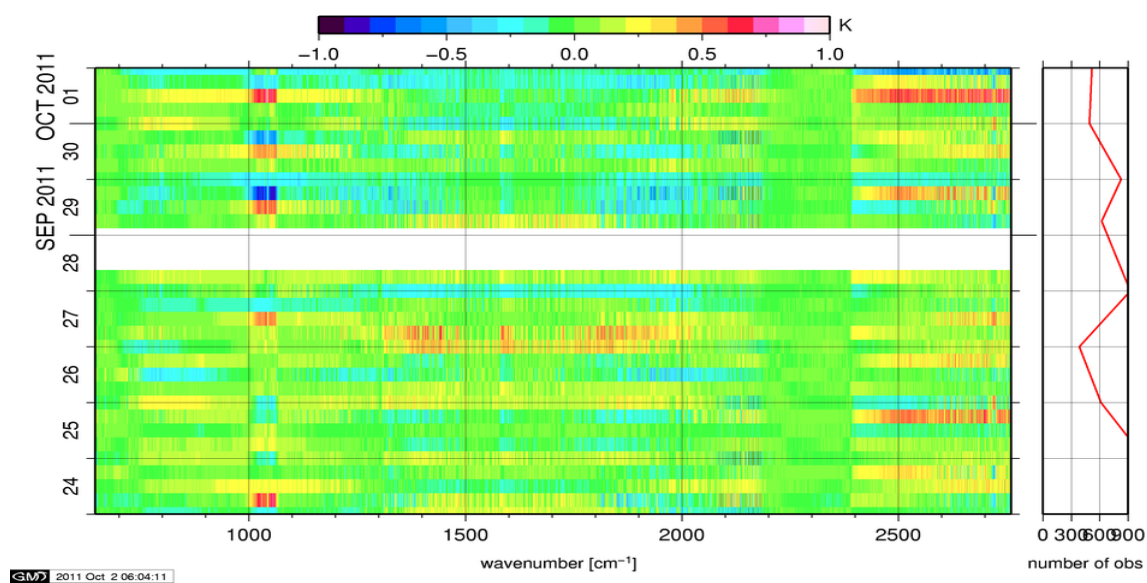


Figure 10: Radiance Anomaly in BRT: All Channels

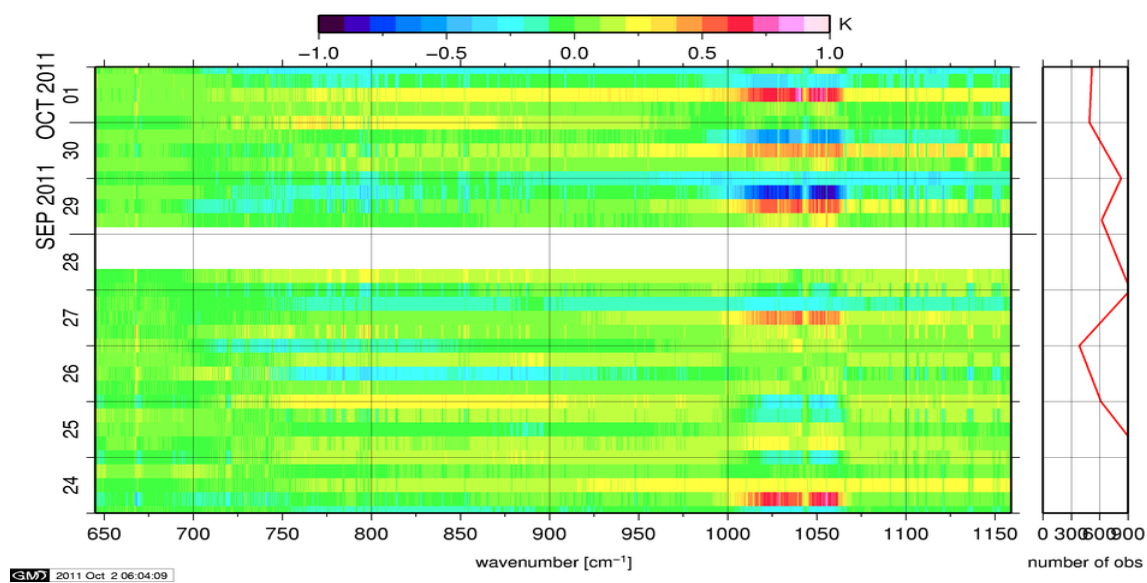


Figure 11: Radiance Anomaly in BRT: IASI Band 1

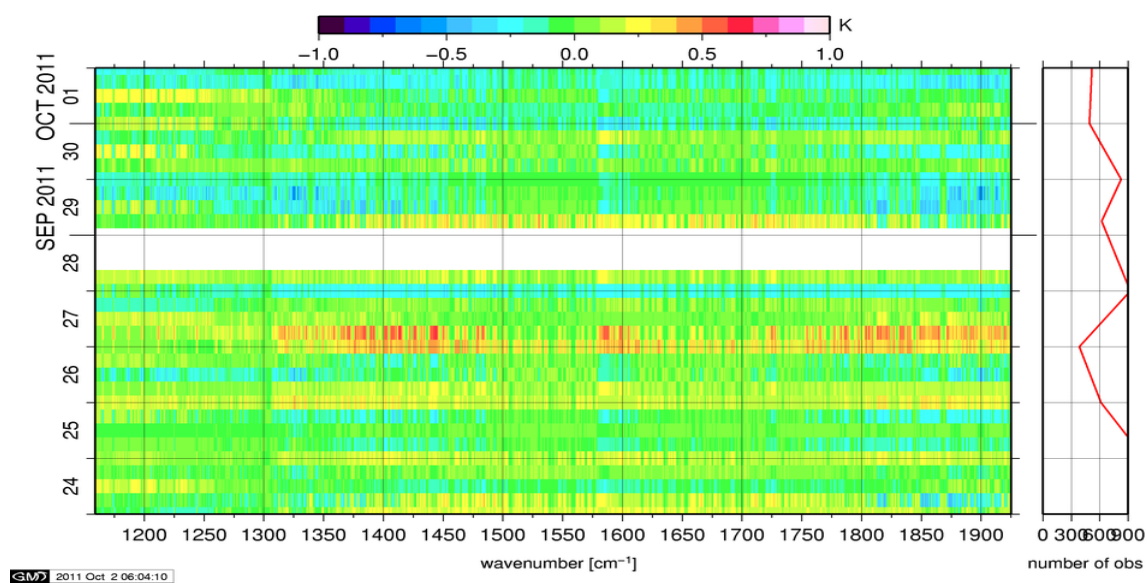


Figure 12: Radiance Anomaly in BRT: IASI Band 2

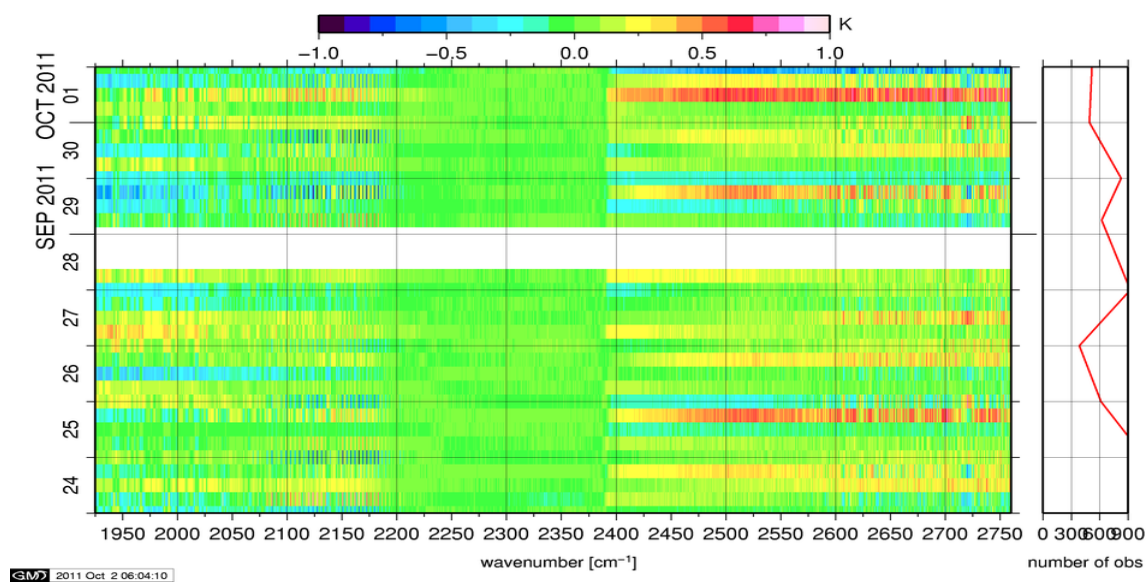


Figure 13: Radiance Anomaly in BRT: IASI Band 3

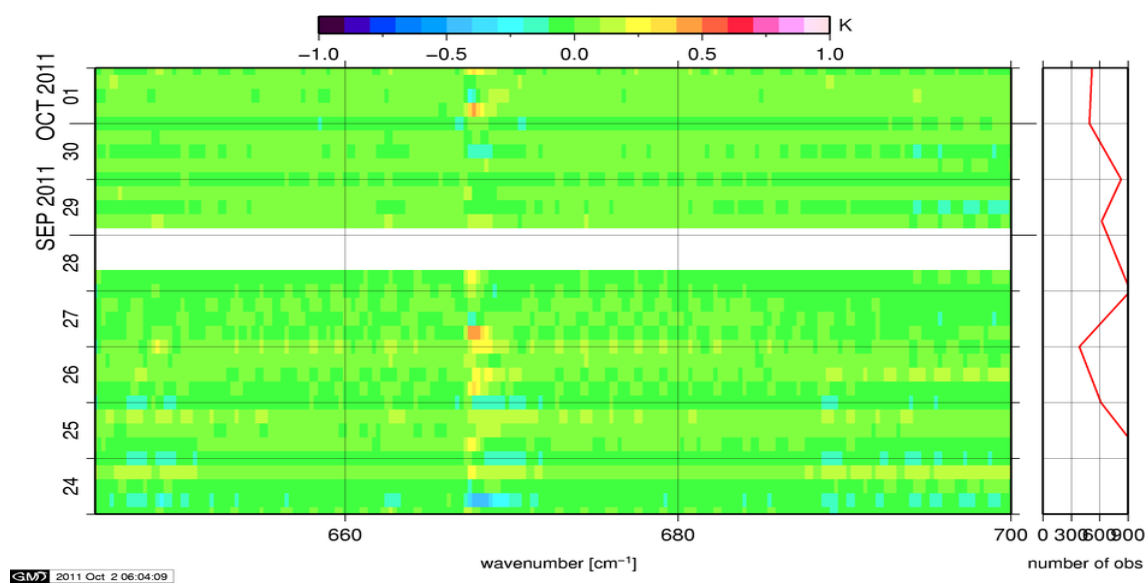


Figure 14: Radiance Anomaly in BRT: CO2 14

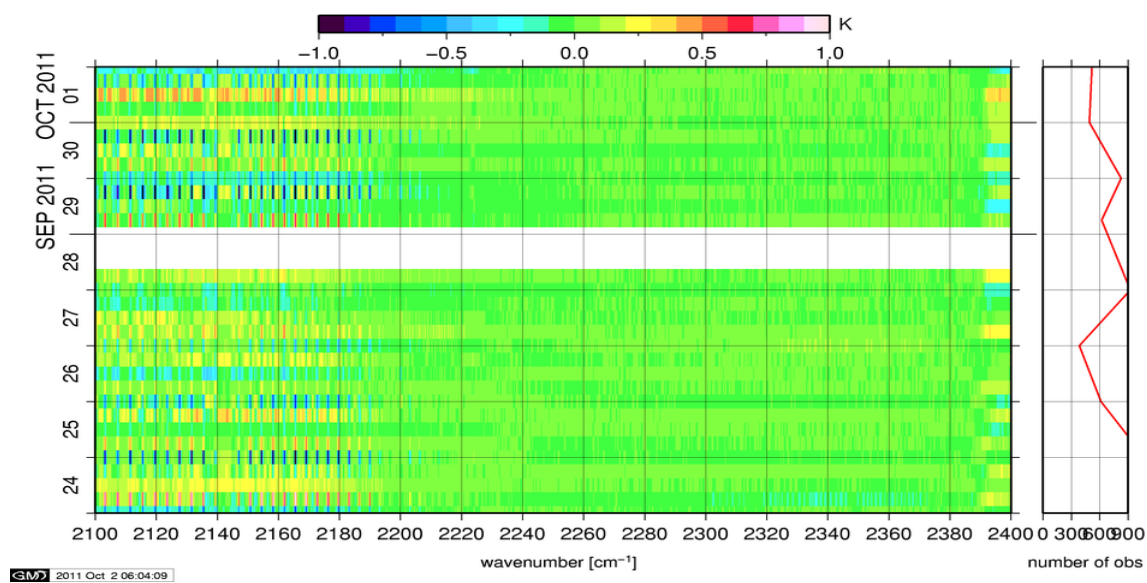


Figure 15: Radiance Anomaly in BRT: CO2 4.3

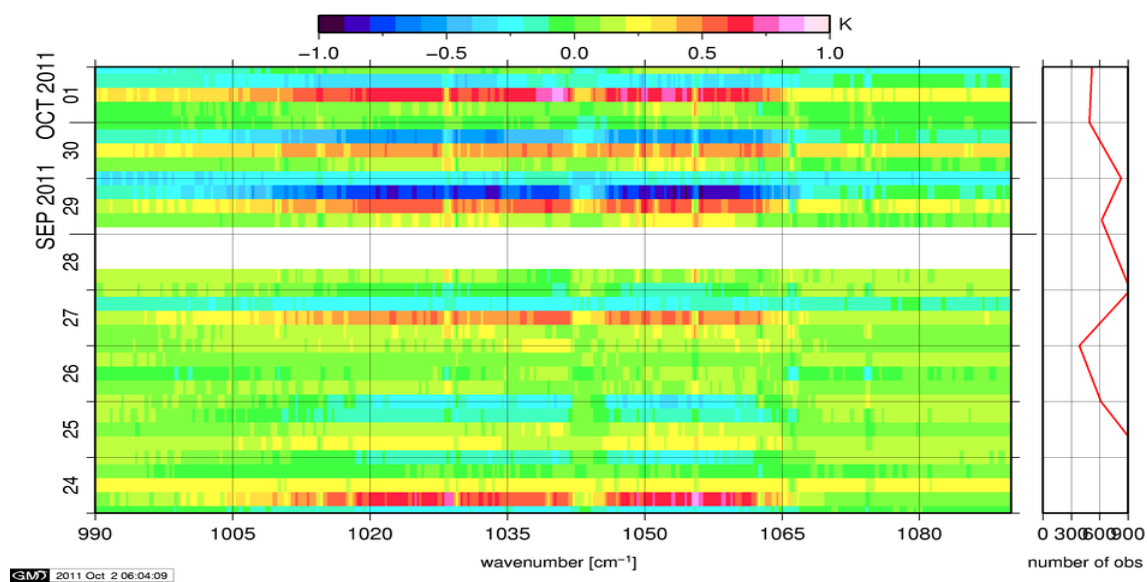


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

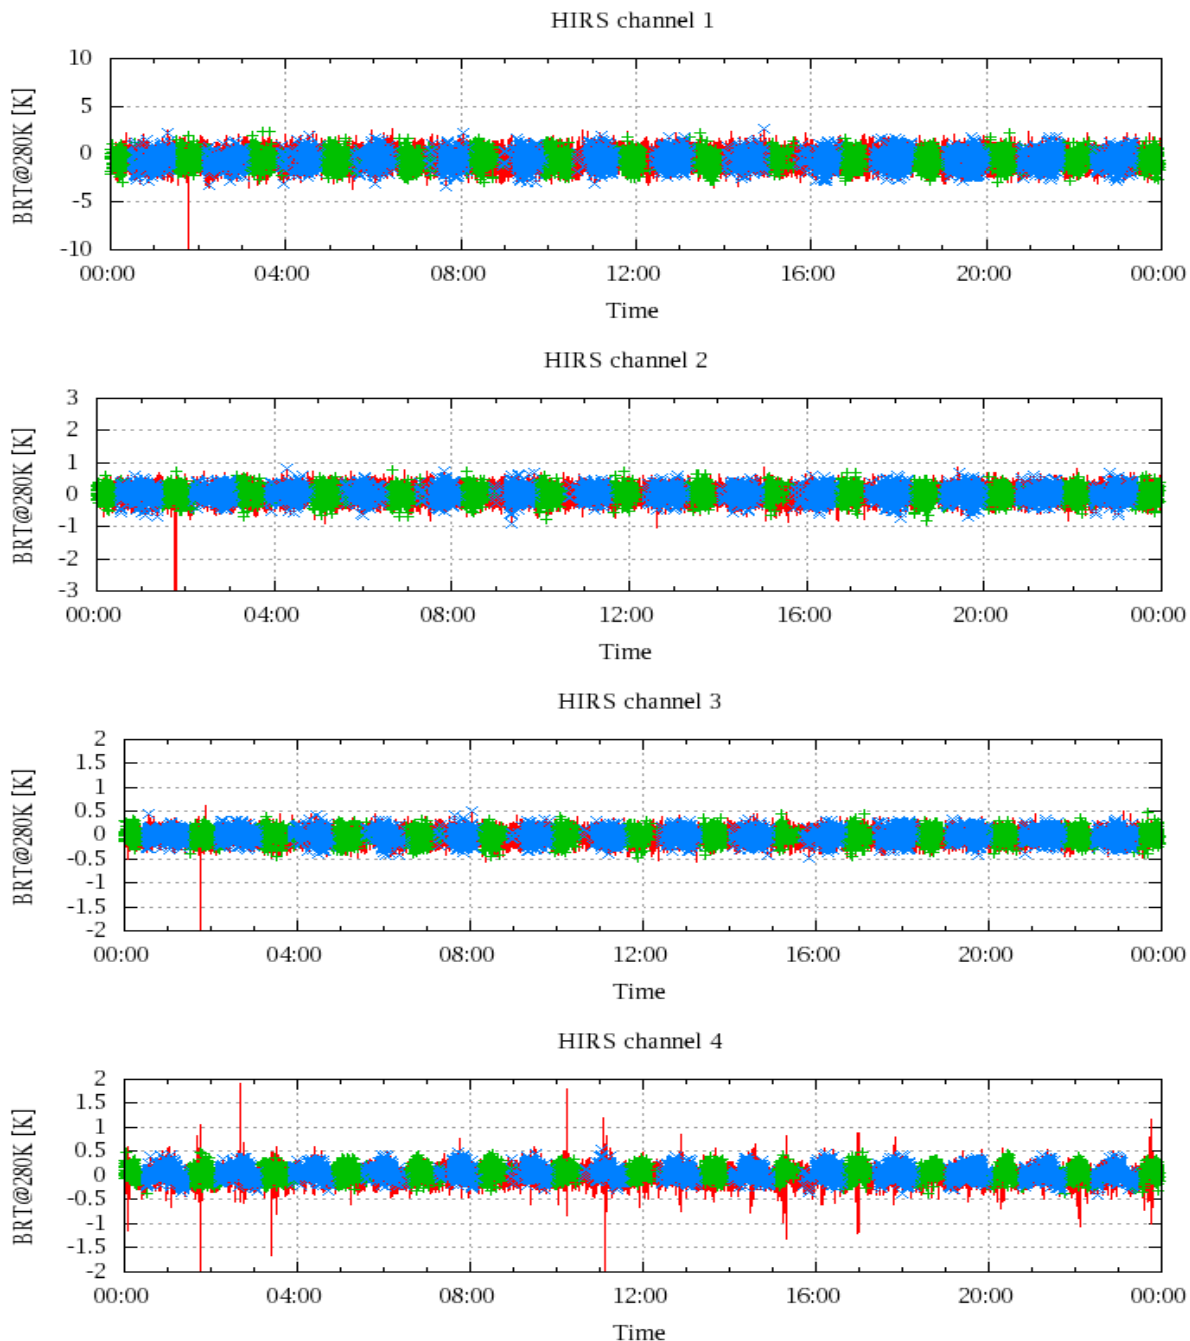


Figure 17: Radiance Differences in BRT

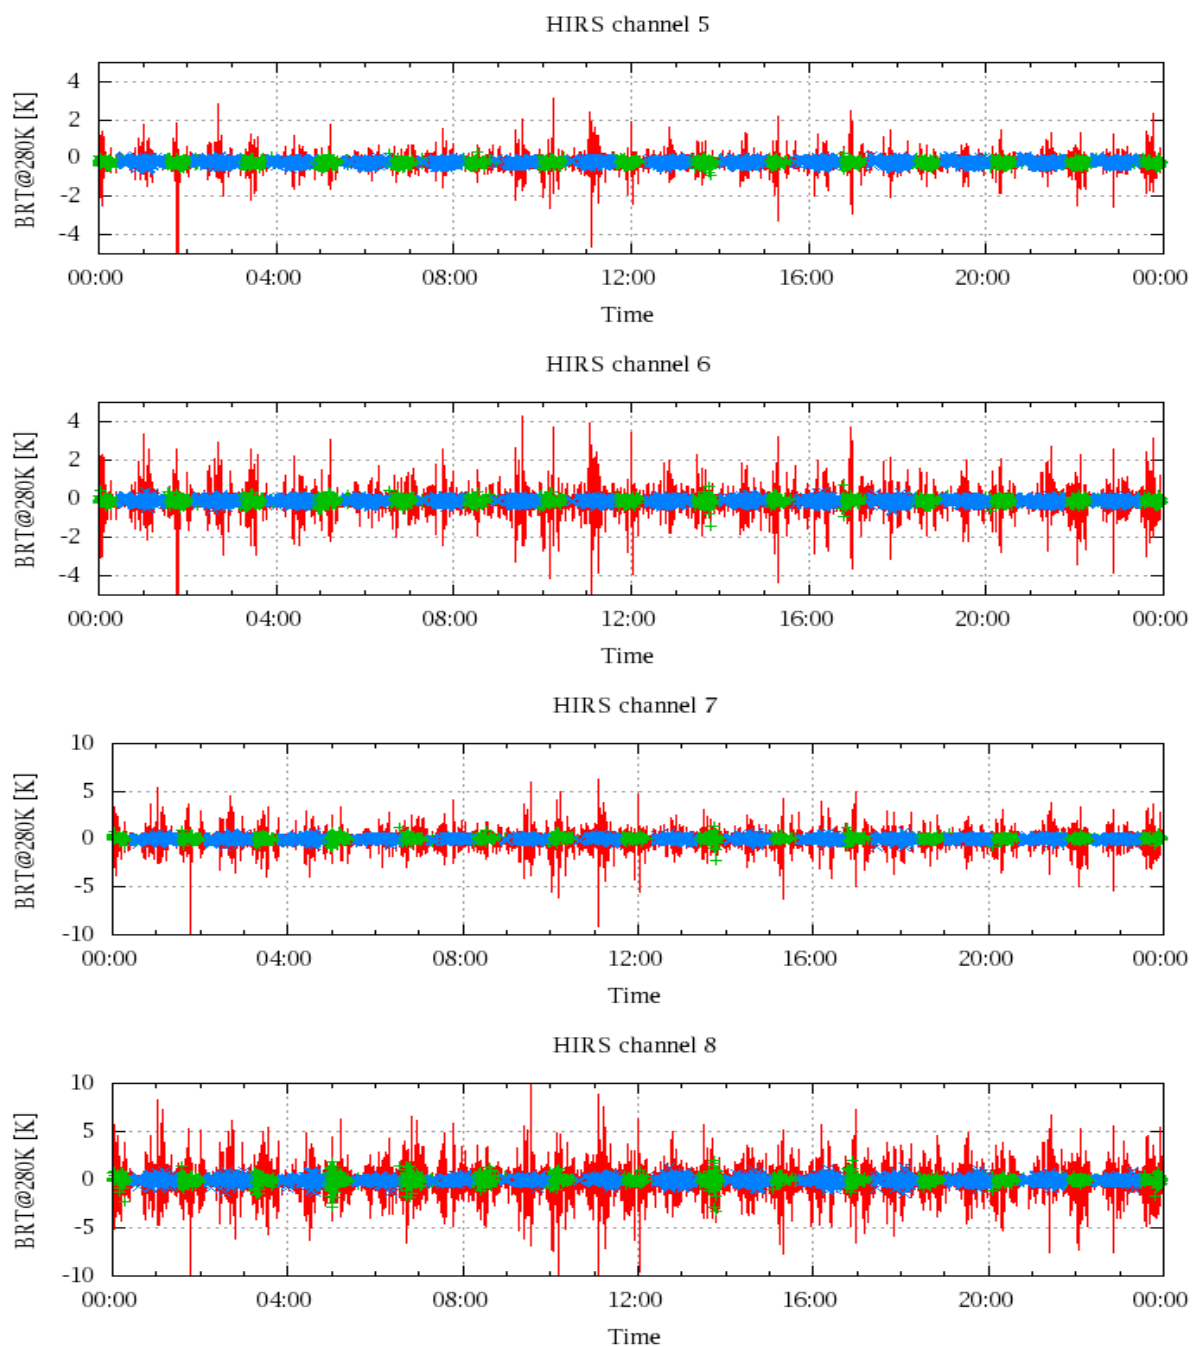


Figure 18: Radiance Differences in BRT

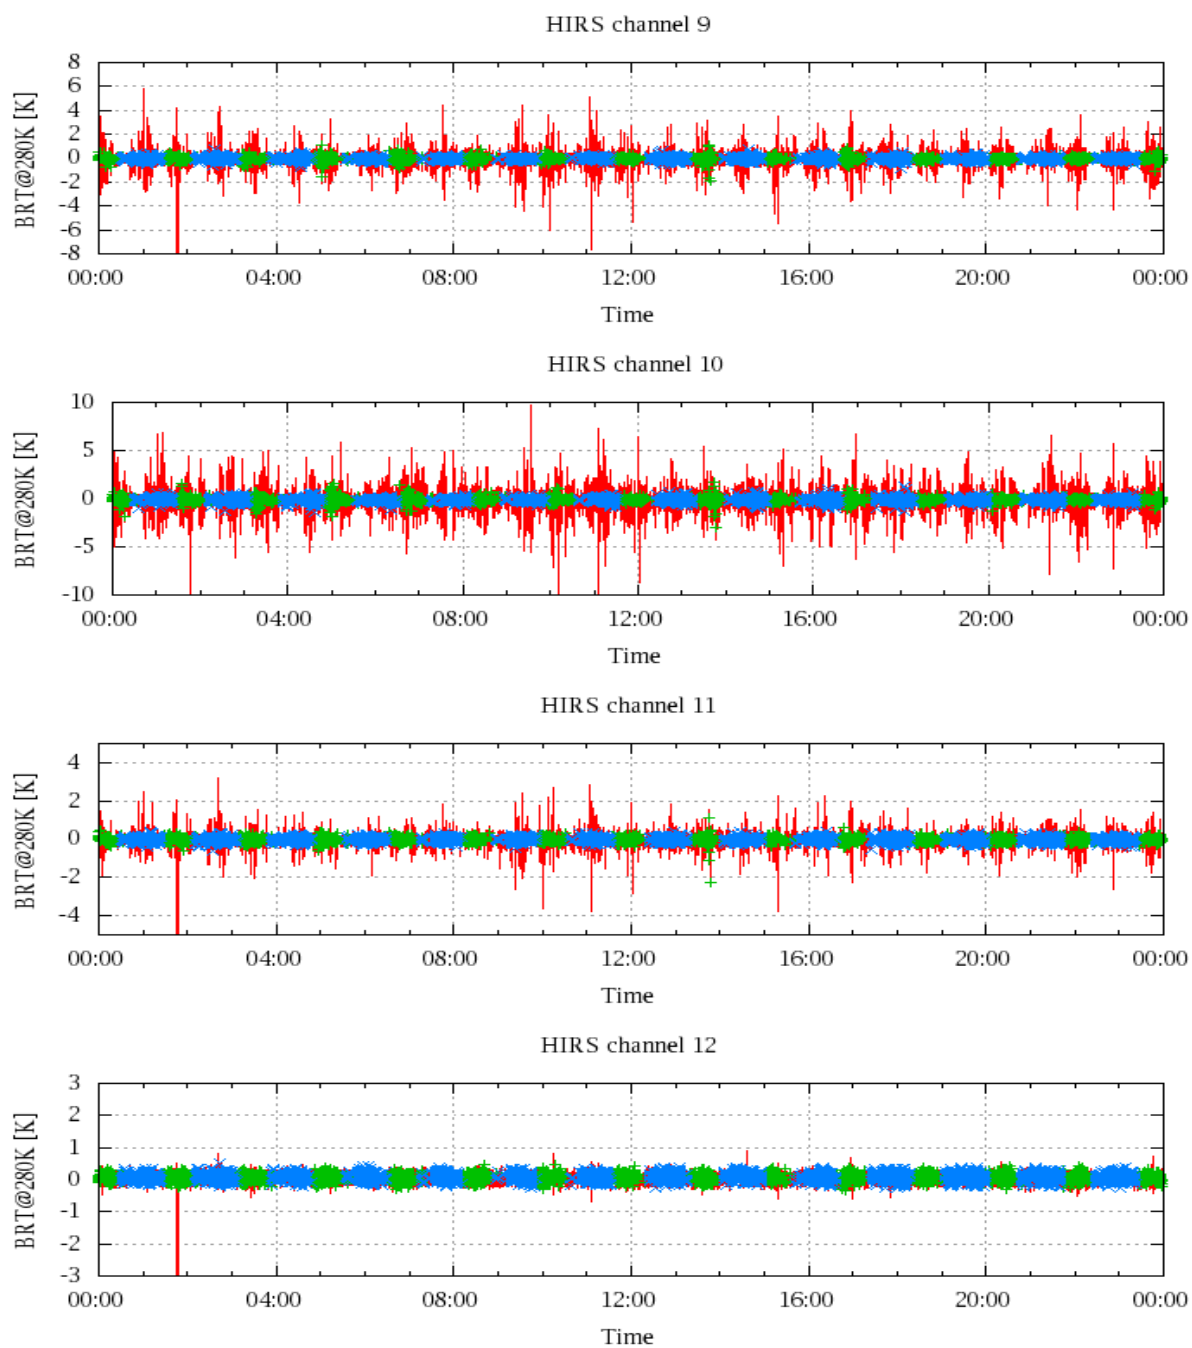


Figure 19: Radiance Differences in BRT

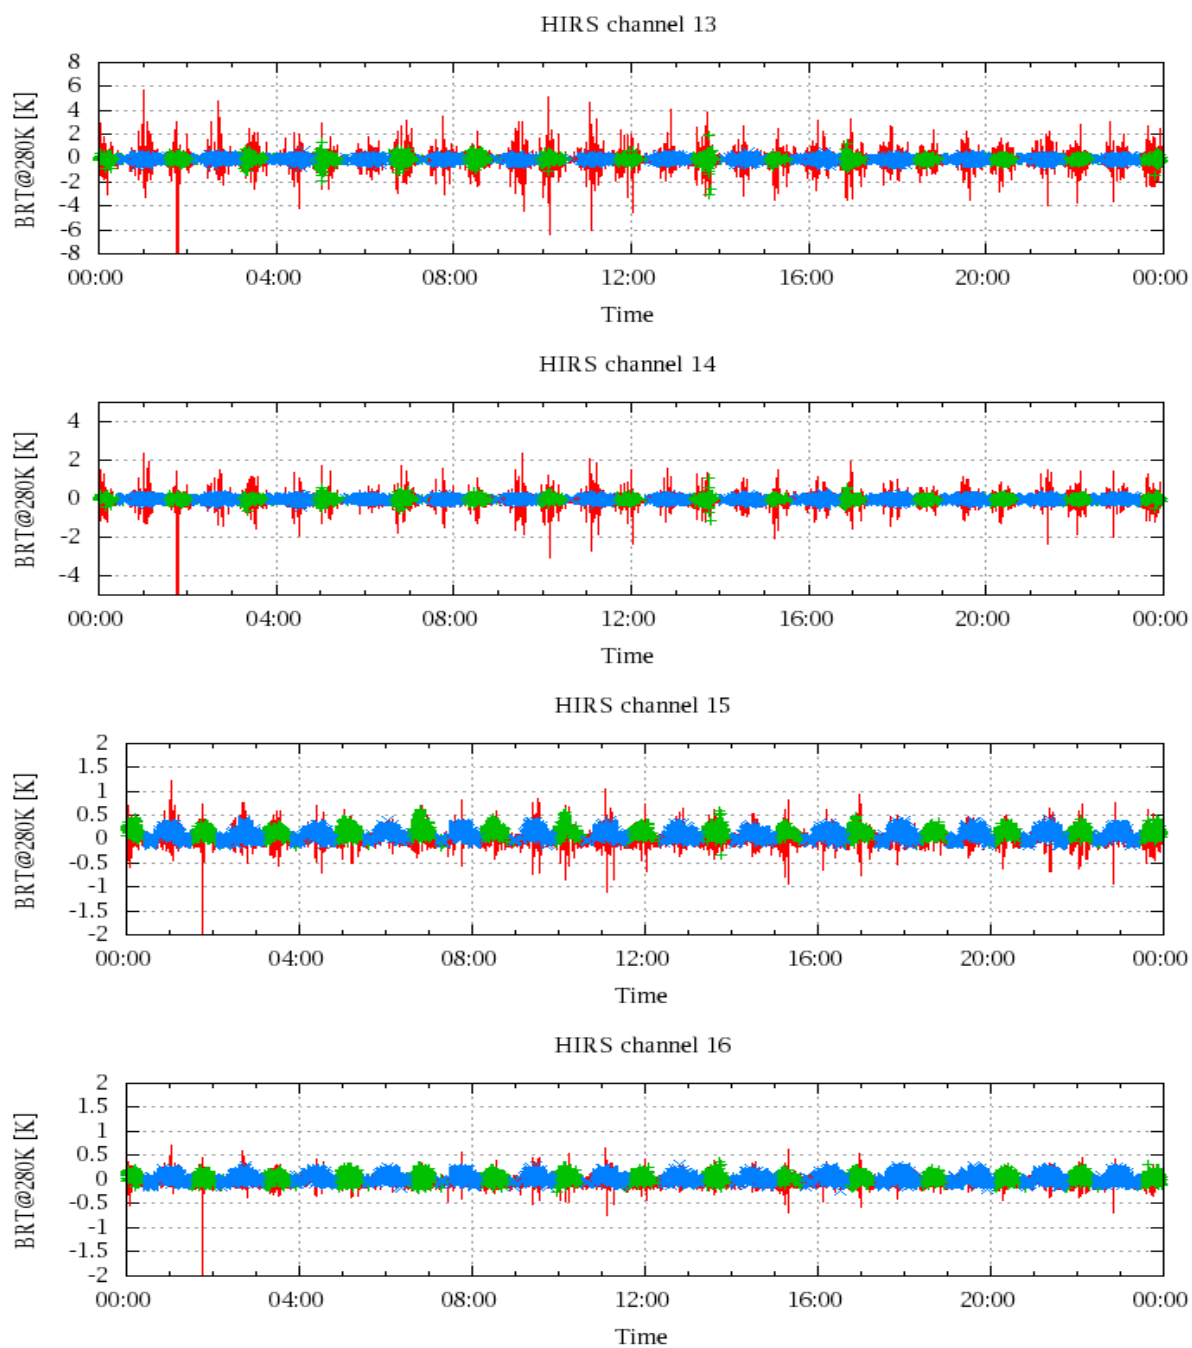


Figure 20: Radiance Differences in BRT

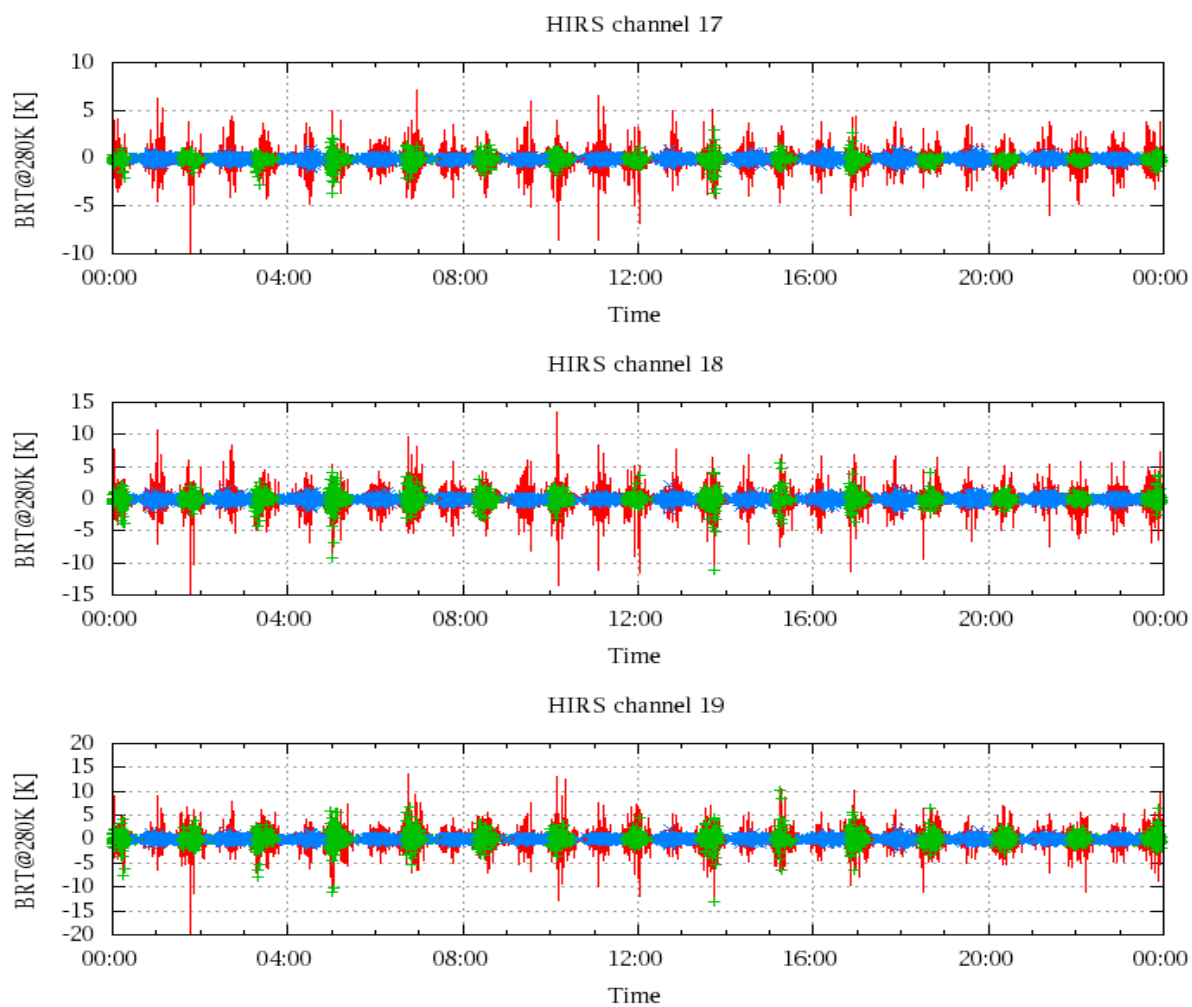


Figure 21: Radinace Differences in BRT