

IASI L0 and L1 Daily Monitoring Report **Metop-B**

IASI monitoring team

13/02/2026 00:00:00 - 14/02/2026 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the Metop-B satellite retrieved from the IASI L0 and L1 ENG product (3 minutes data packet) for 13/02/2026 00:00:00 - 14/02/2026 00:00:00 .

The monitoring data are extracted on PDU basis.

2 Data quantity 13/02/2026 00:00:00 - 14/02/2026 00:00:00

Product Type	Number	Action
L0 HKTМ PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSTGranule	474	-
L1 DPX PDUs (RM: IASI-HIRS)	0	e
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	8554	8558	20260213172000.484	20260213172001.352
PX1 (130)	8559	8580	20260213172001.566	20260213172007.621
PX2 (135)	8554	8558	20260213172000.484	20260213172001.352
PX2 (135)	8560	8580	20260213172001.781	20260213172007.621
PX3 (140)	8549	8551	20260213171957.891	20260213171959.836
PX3 (140)	8552	8554	20260213172000.055	20260213172000.484
PX3 (140)	8557	8560	20260213172001.137	20260213172001.781
PX3 (140)	8561	8580	20260213172002.000	20260213172007.621
PX4 (145)	8549	8551	20260213171957.891	20260213171959.836
PX4 (145)	8552	8554	20260213172000.055	20260213172000.484
PX4 (145)	8555	8557	20260213172000.703	20260213172001.137
PX4 (145)	8561	8580	20260213172002.000	20260213172007.621
IMG (150)	3826	3828	20260213171959.621	20260213172000.055
IMG (150)	3828	3830	20260213172000.055	20260213172000.484
IMG (150)	3834	3837	20260213172001.352	20260213172002.000
IMG (150)	3837	3856	20260213172002.000	20260213172006.324
VER (160)	10479	10482	20260213171949.891	20260213171957.891
VER (160)	10482	10484	20260213171957.891	20260213171957.891
VER (160)	10484	10486	20260213171957.891	20260213172002.000

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
VER (160)	10487	10489	20260213172002.000	20260213172002.000
AUX (180)	-	-	-	-

Table 2: L0 data gaps

3 Instrument modes


Time	Transition from	Transition to
13/02/2026 00:00:04	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality


Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	474	-
GQisFlagQual set (PX1)	99.67 %	-
GQisFlagQual set (PX2)	99.74 %	-
GQisFlagQual set (PX3)	99.74 %	-
GQisFlagQual set (PX4)	99.68 %	-
GQisFlagQual set (all)	99.71 %	-

Table 4: Quality flags

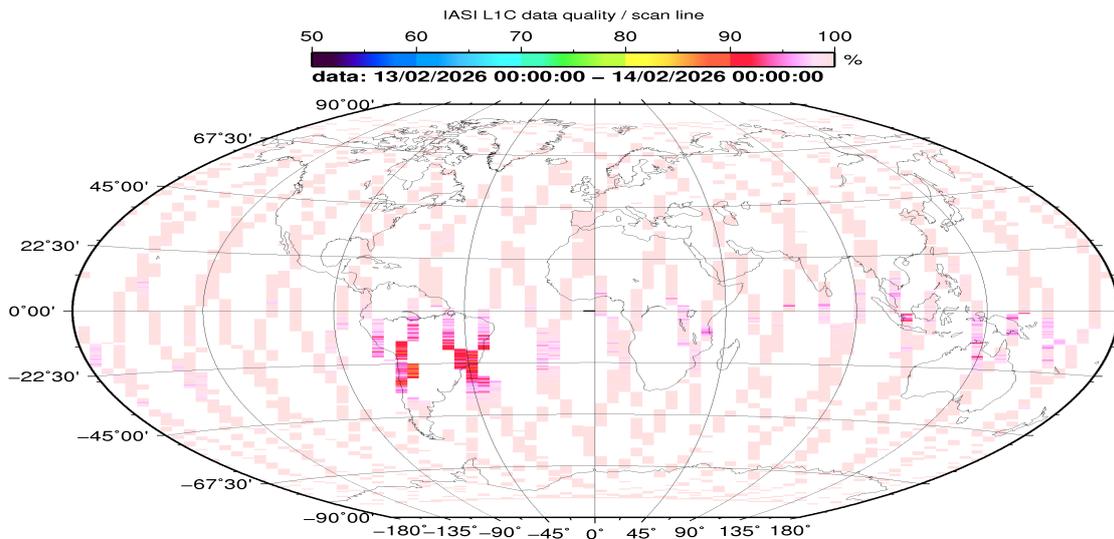

CM 2026 Feb 14 07:40:45

Figure 1: L1C data quality

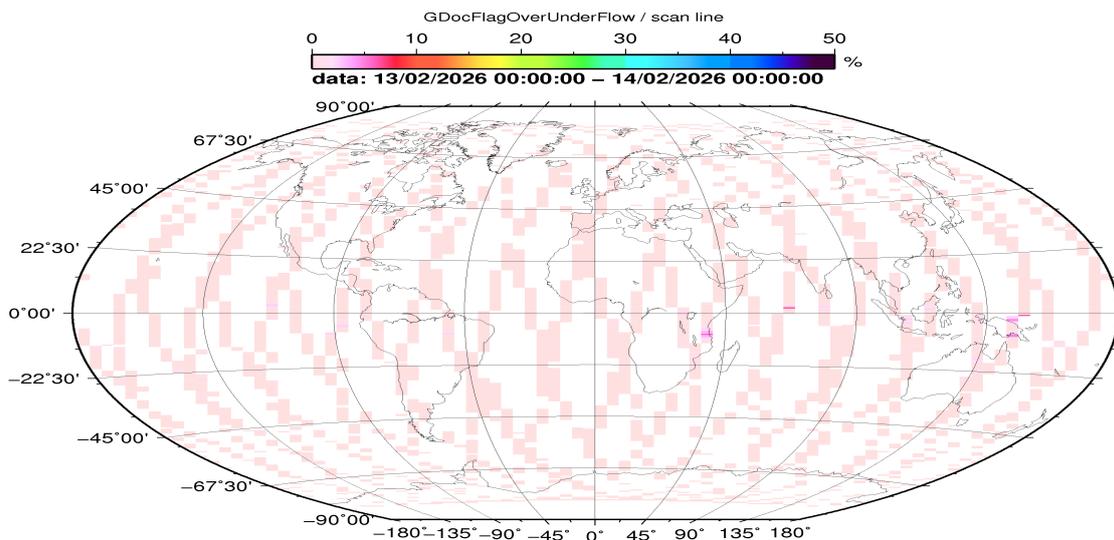

CM 2026 Feb 14 07:40:49

Figure 2: Flag of Over and Under Flows

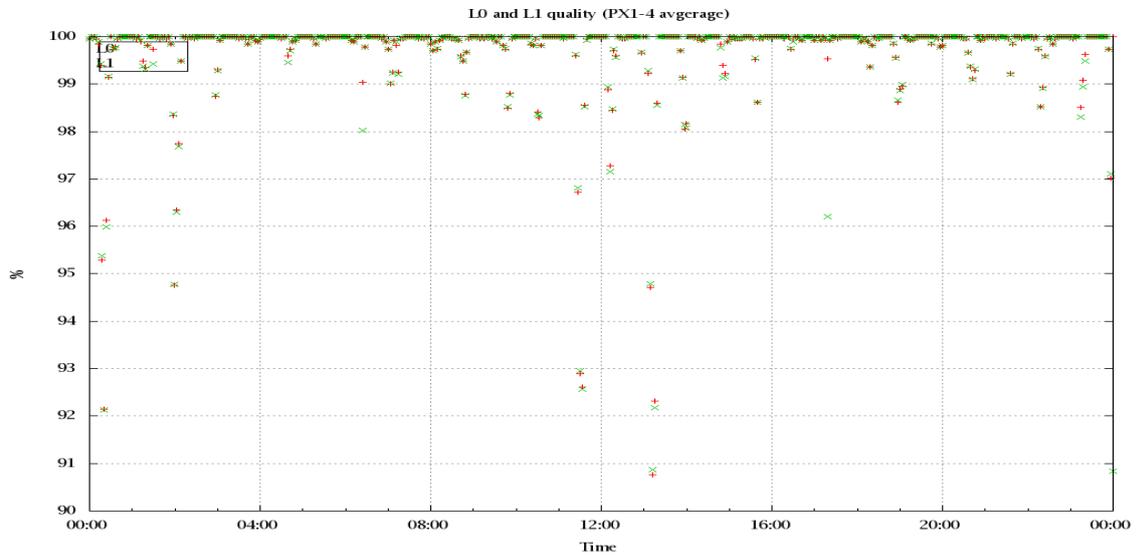


Figure 3: Level 0 and 1C overall quality

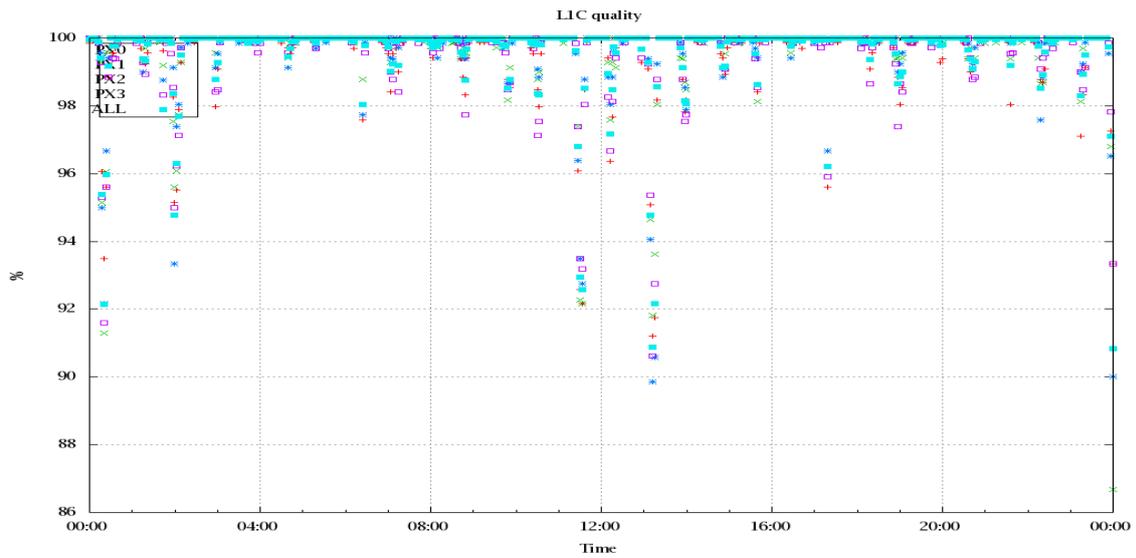


Figure 4: Level 1C quality

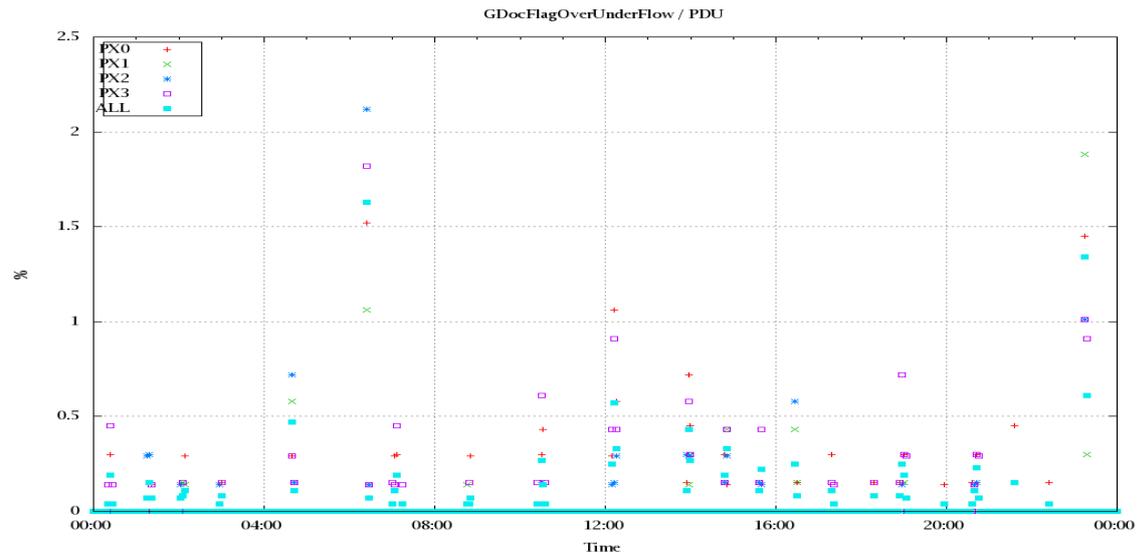


Figure 5: Timeseries of flag of Over and Under Flows

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class).

A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T, water vapor and Ozone. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used.

Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 28 to 34, the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixels and scan positions 10 to 20) and the average bias OBS-CAL (over all pixels and scan positions 10 to 20) of the last 30 days.

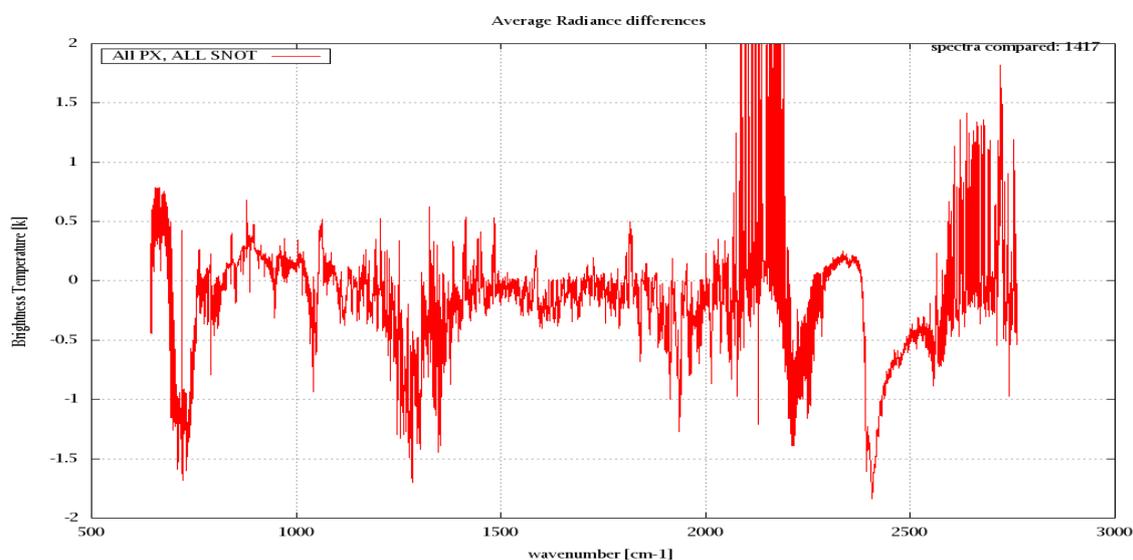


Figure 6: Average Radiance differences: OBS-CAL

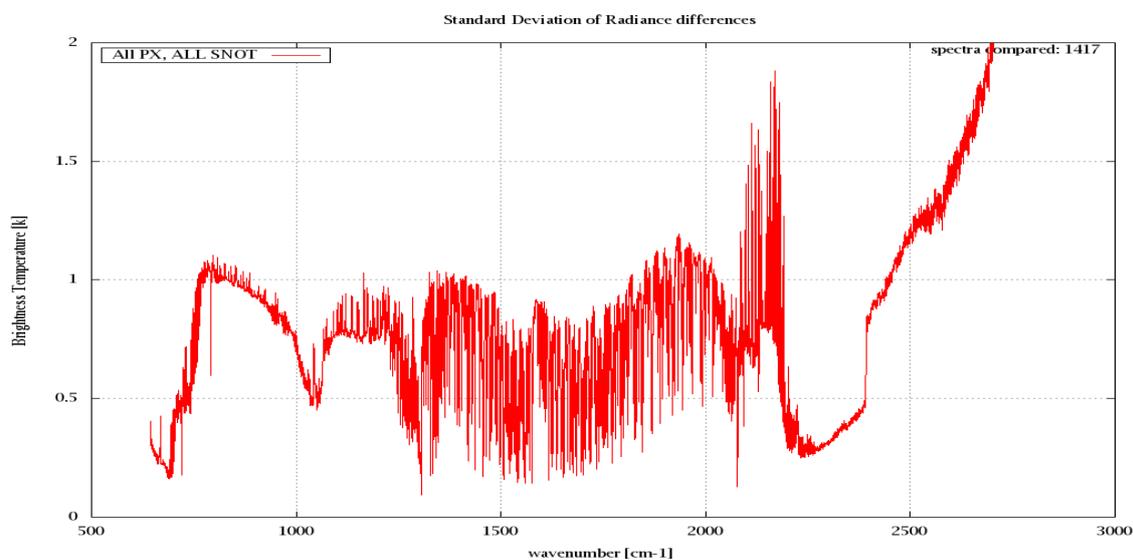


Figure 7: Standard Deviation of Radiance differences

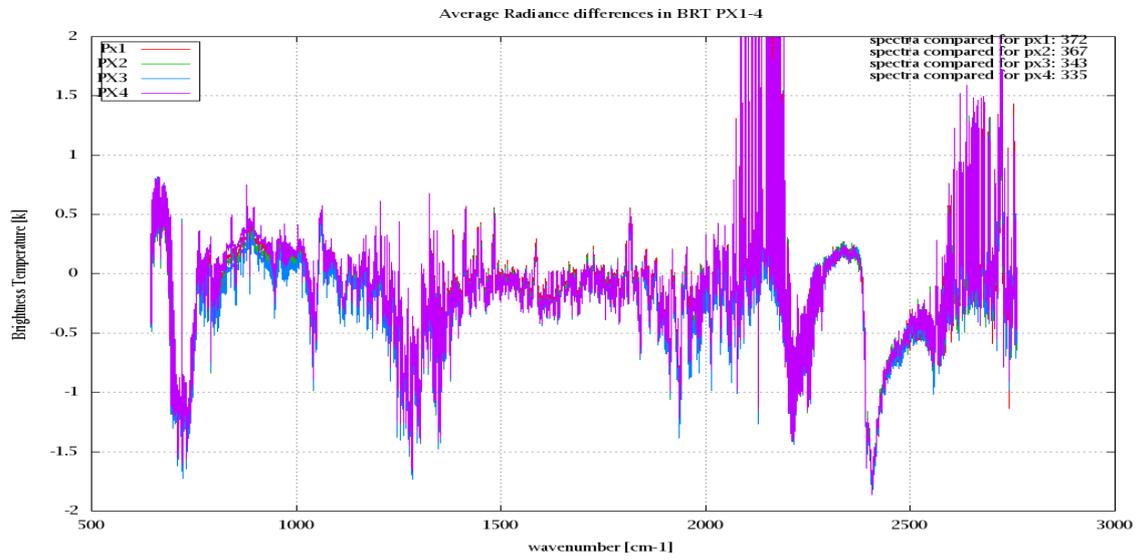


Figure 8: Average Radiance differences: OBS-CAL

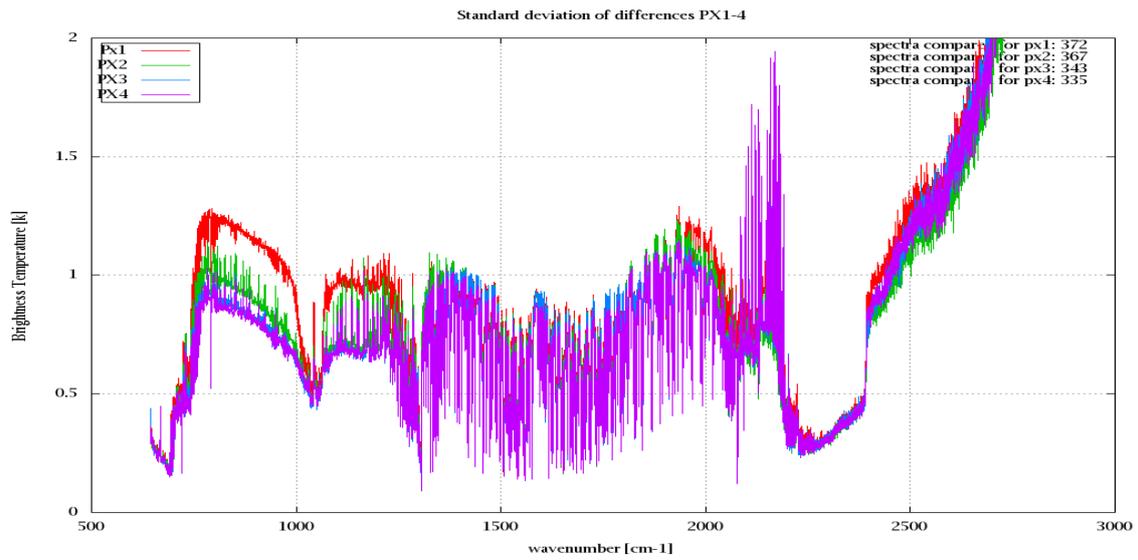


Figure 9: Standard Deviation of Radiance differences

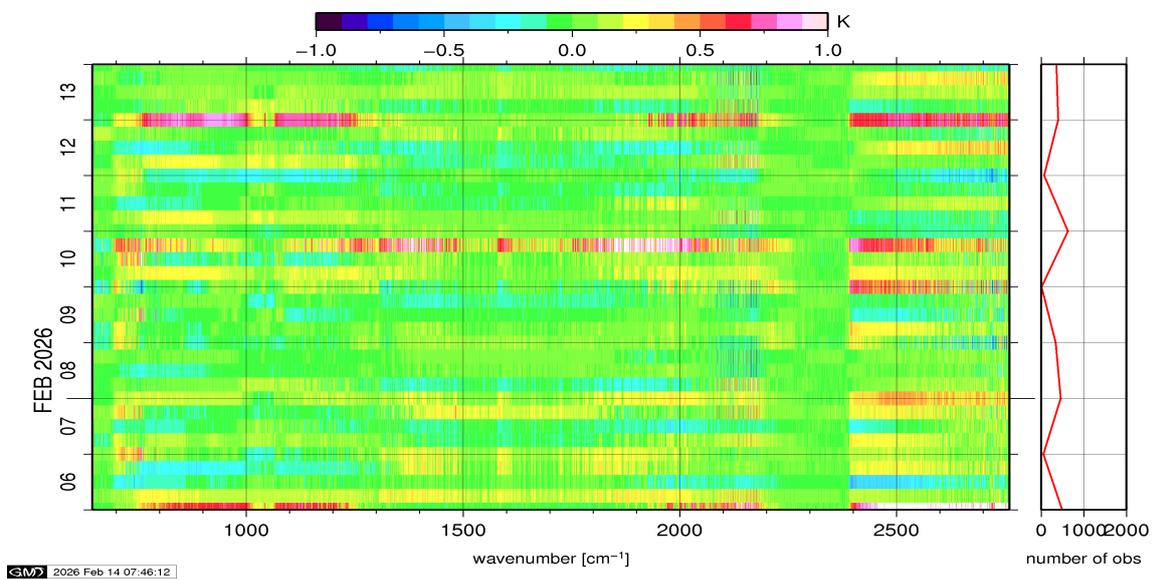


Figure 10: Radiance Anomaly in BT: All Channels

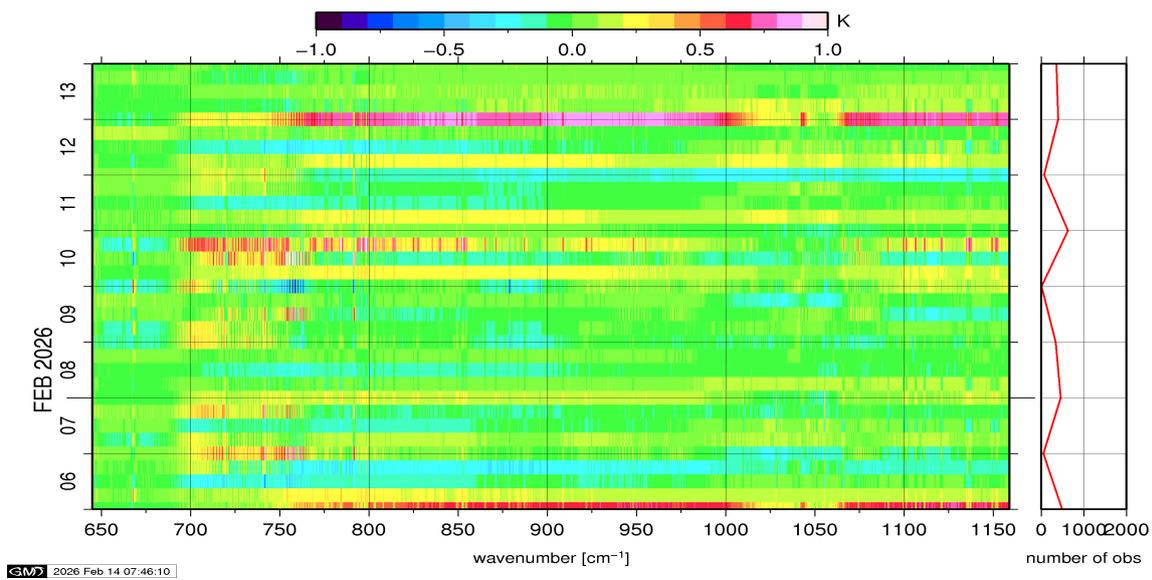


Figure 11: Radiance Anomaly in BT: IASI Band 1

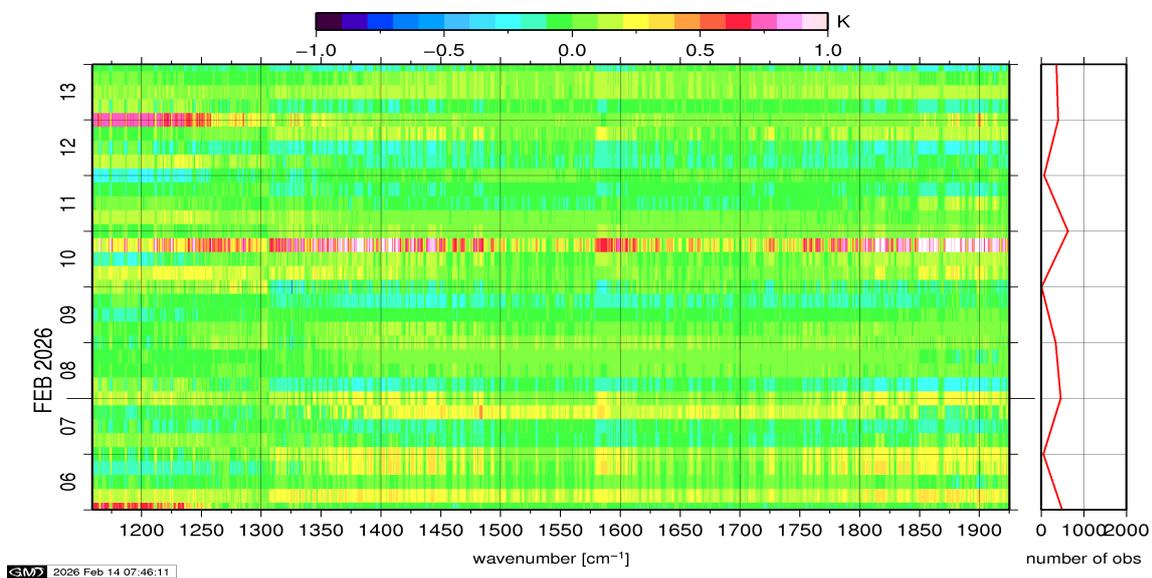


Figure 12: Radiance Anomaly in BT: IASI Band 2

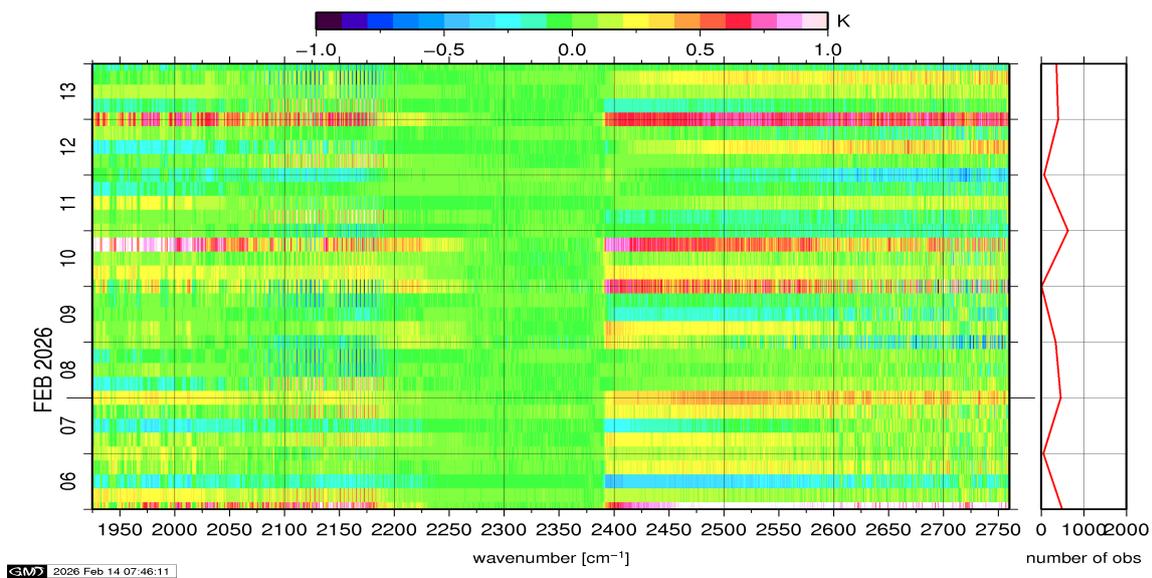


Figure 13: Radiance Anomaly in BT: IASI Band 3

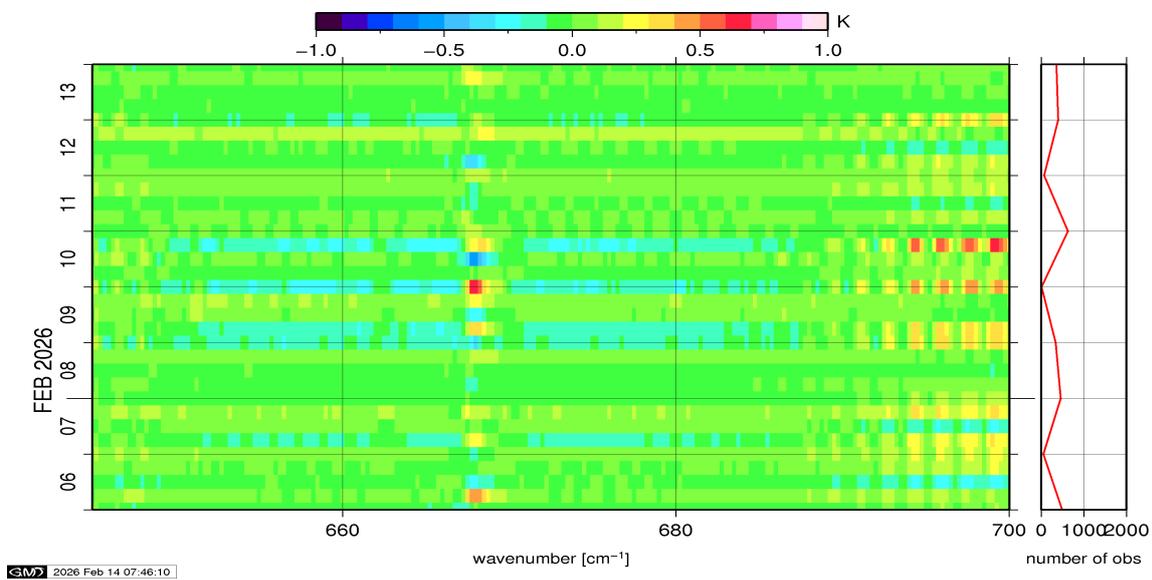


Figure 14: Radiance Anomaly in BT: CO2 14

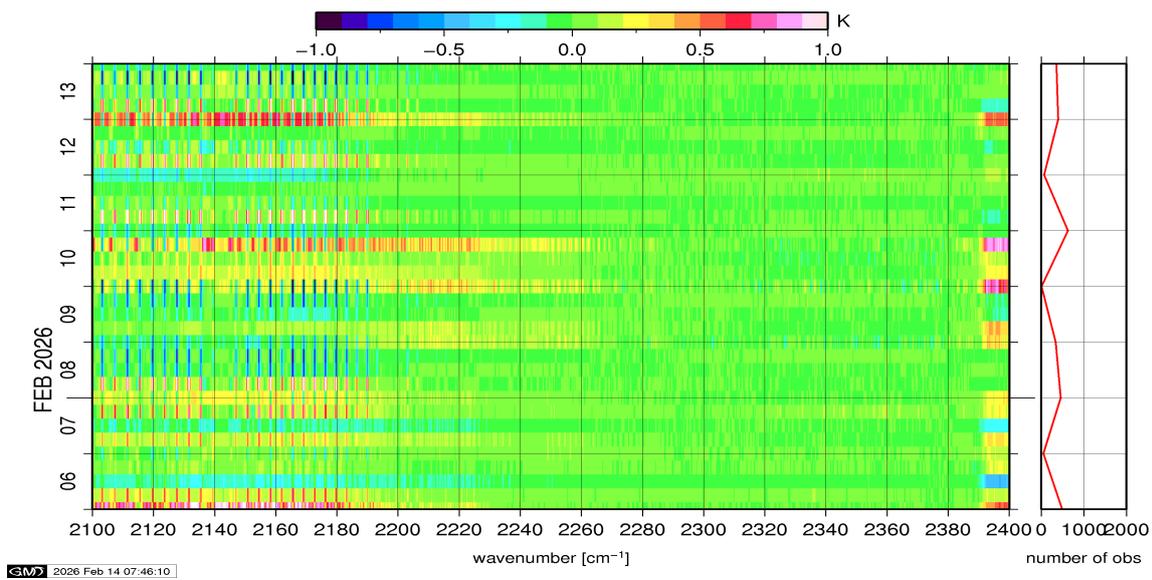


Figure 15: Radiance Anomaly in BT: CO2 4.3

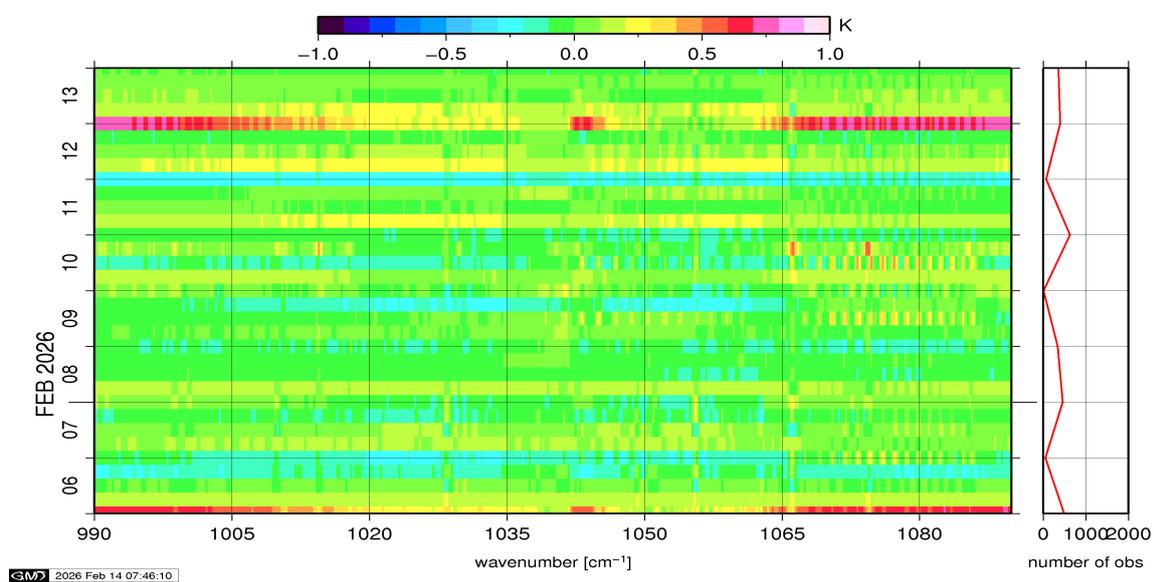


Figure 16: Radiance Anomaly in BT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board Metop is performed on all pixels with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference NeDT. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

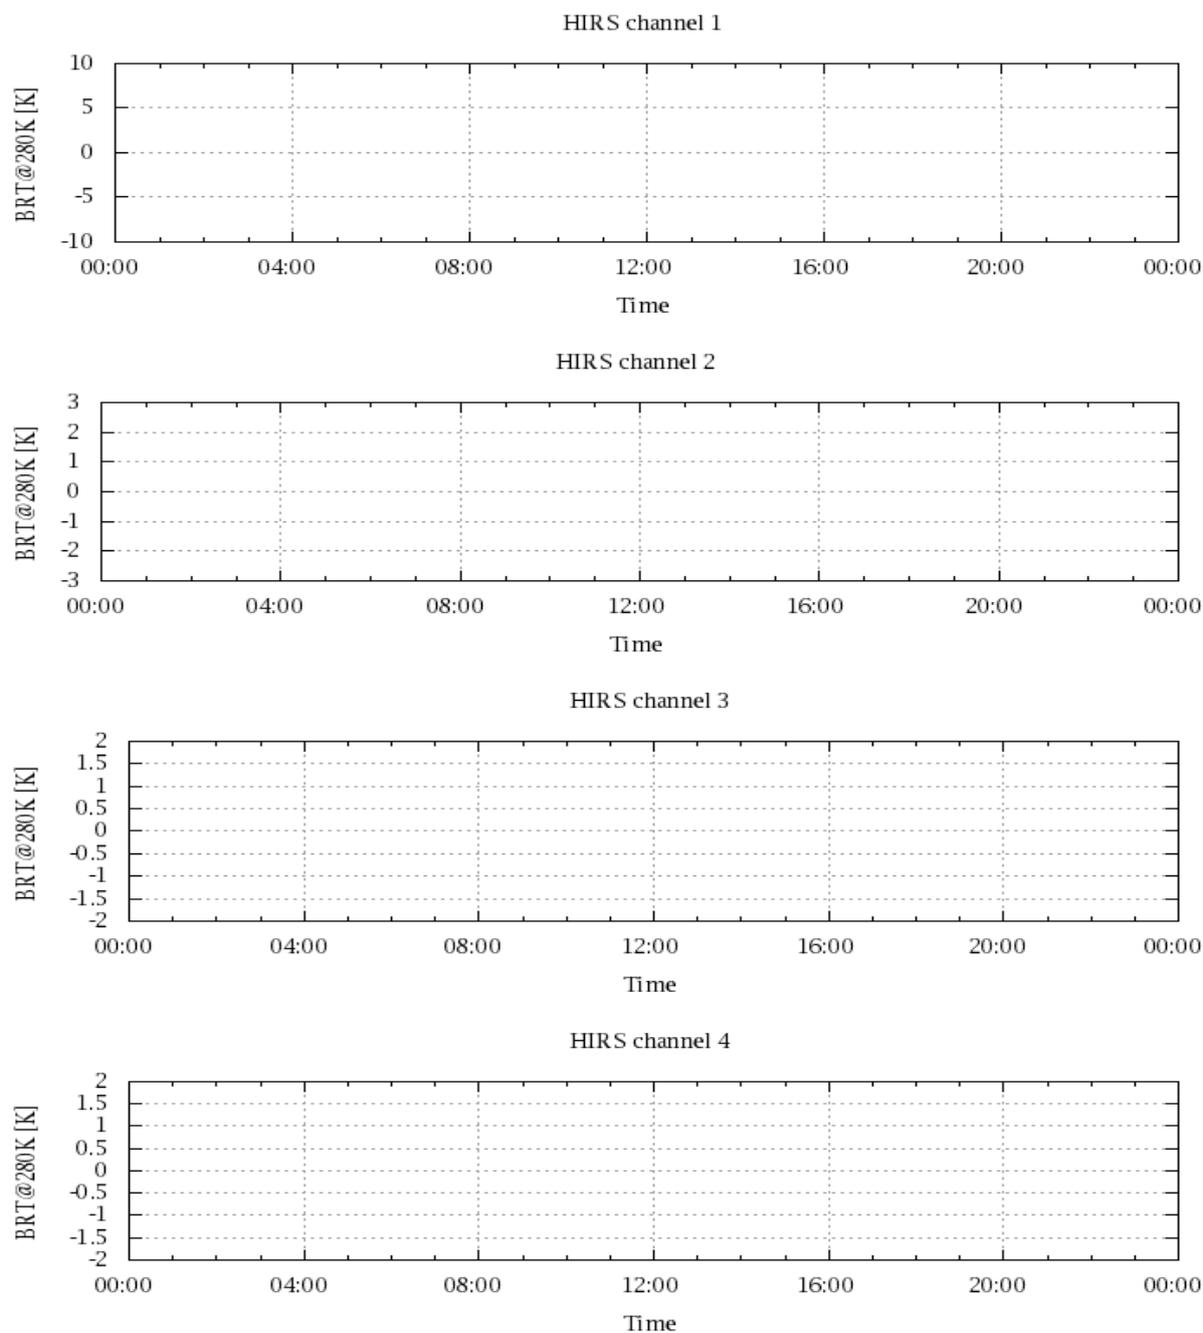


Figure 17: Radiance Differences in BT

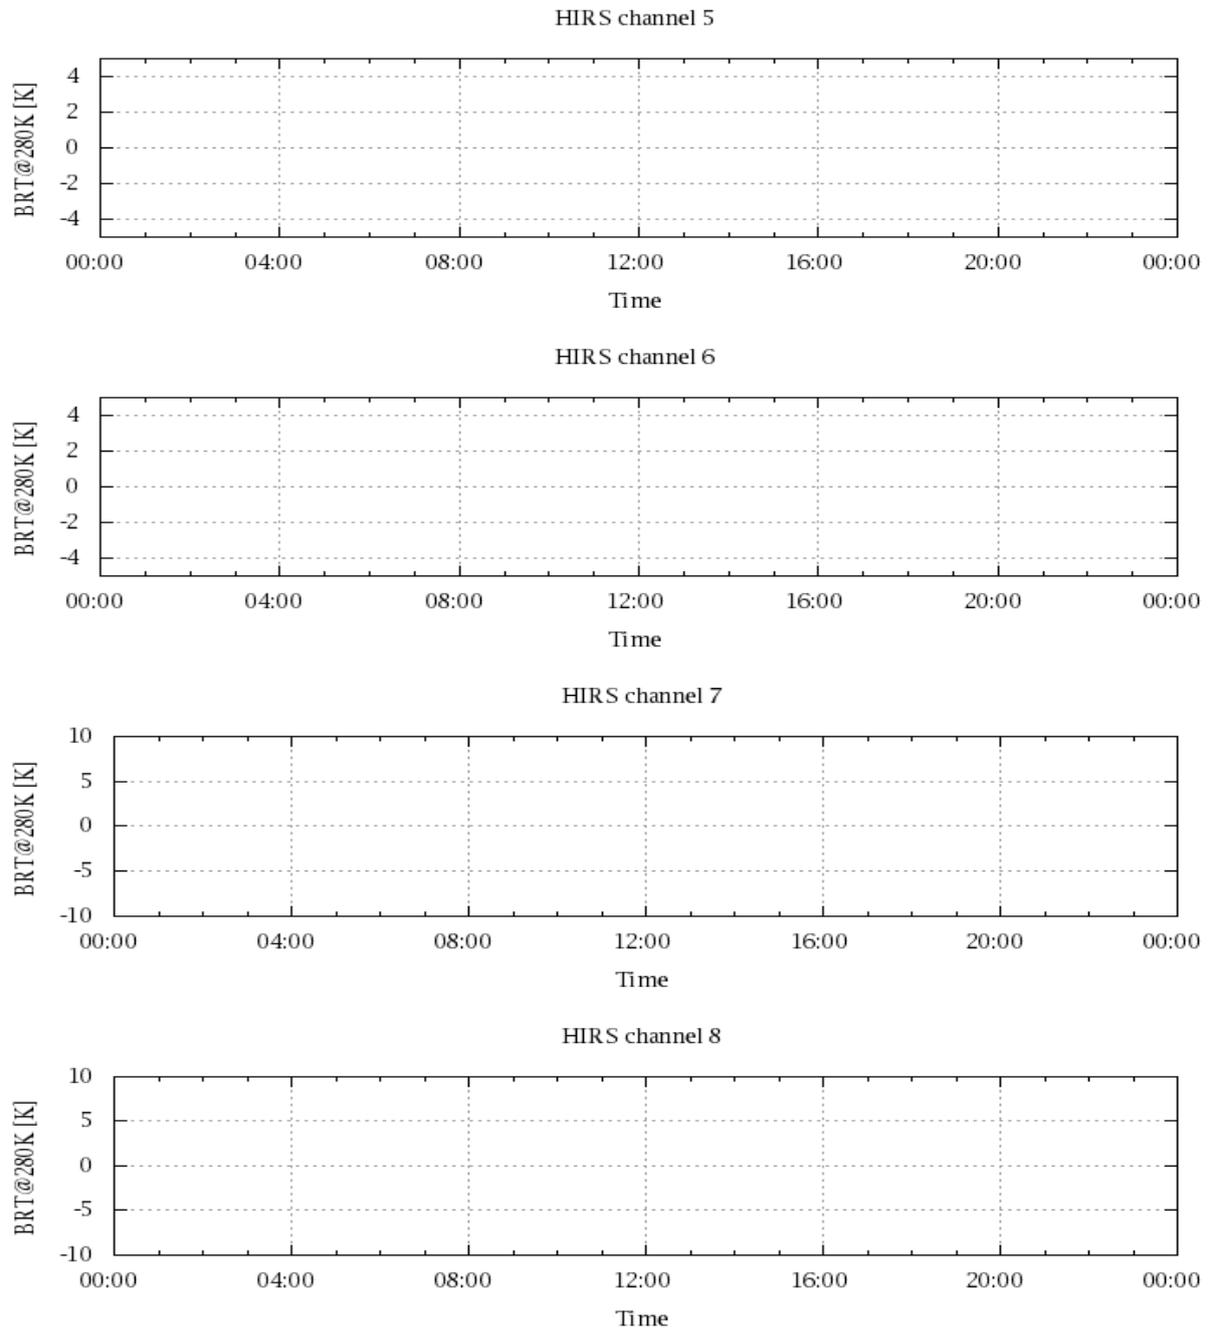


Figure 18: Radiance Differences in BT

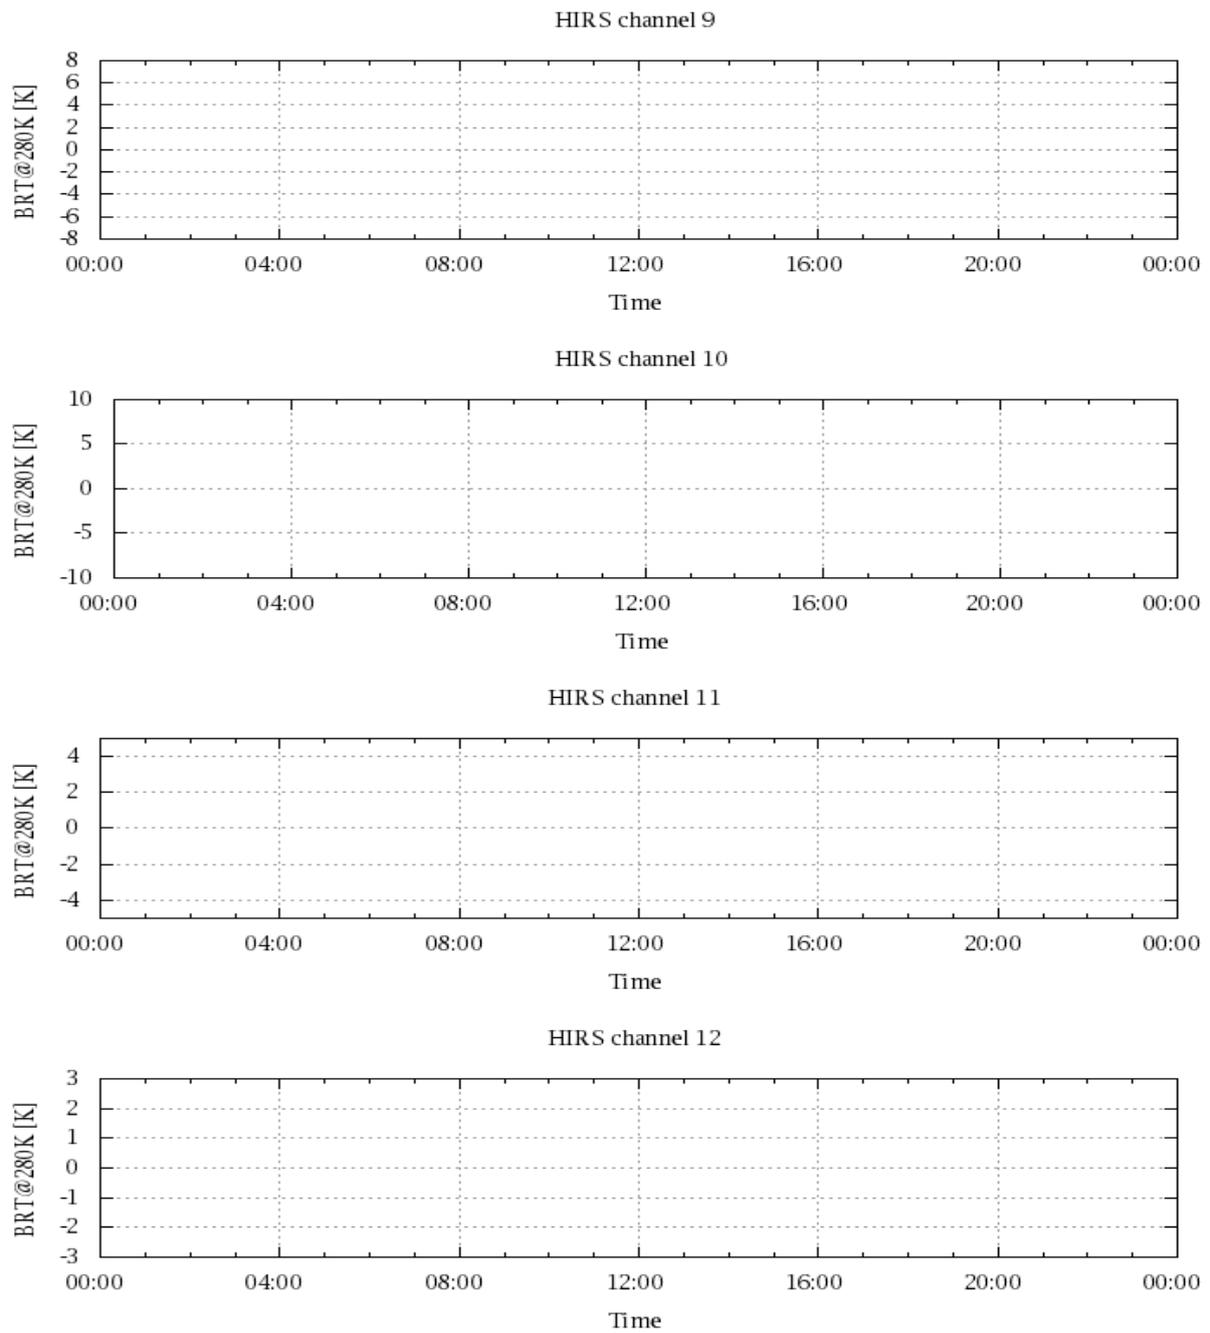


Figure 19: Radiance Differences in BT

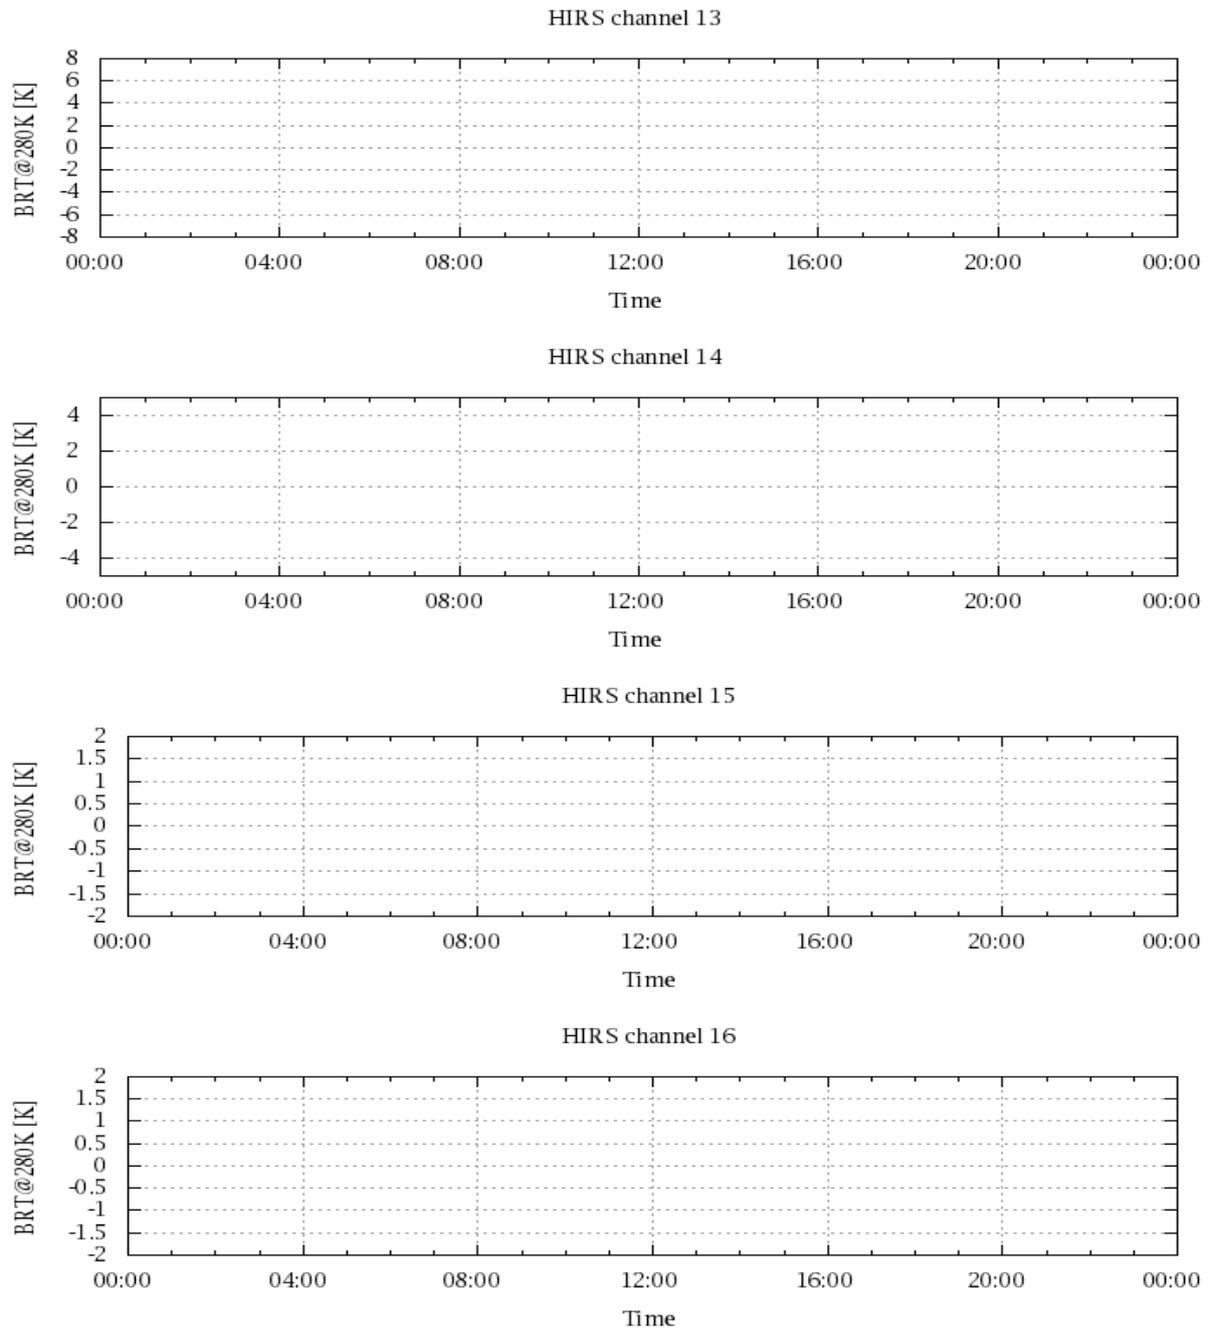


Figure 20: Radiance Differences in BT

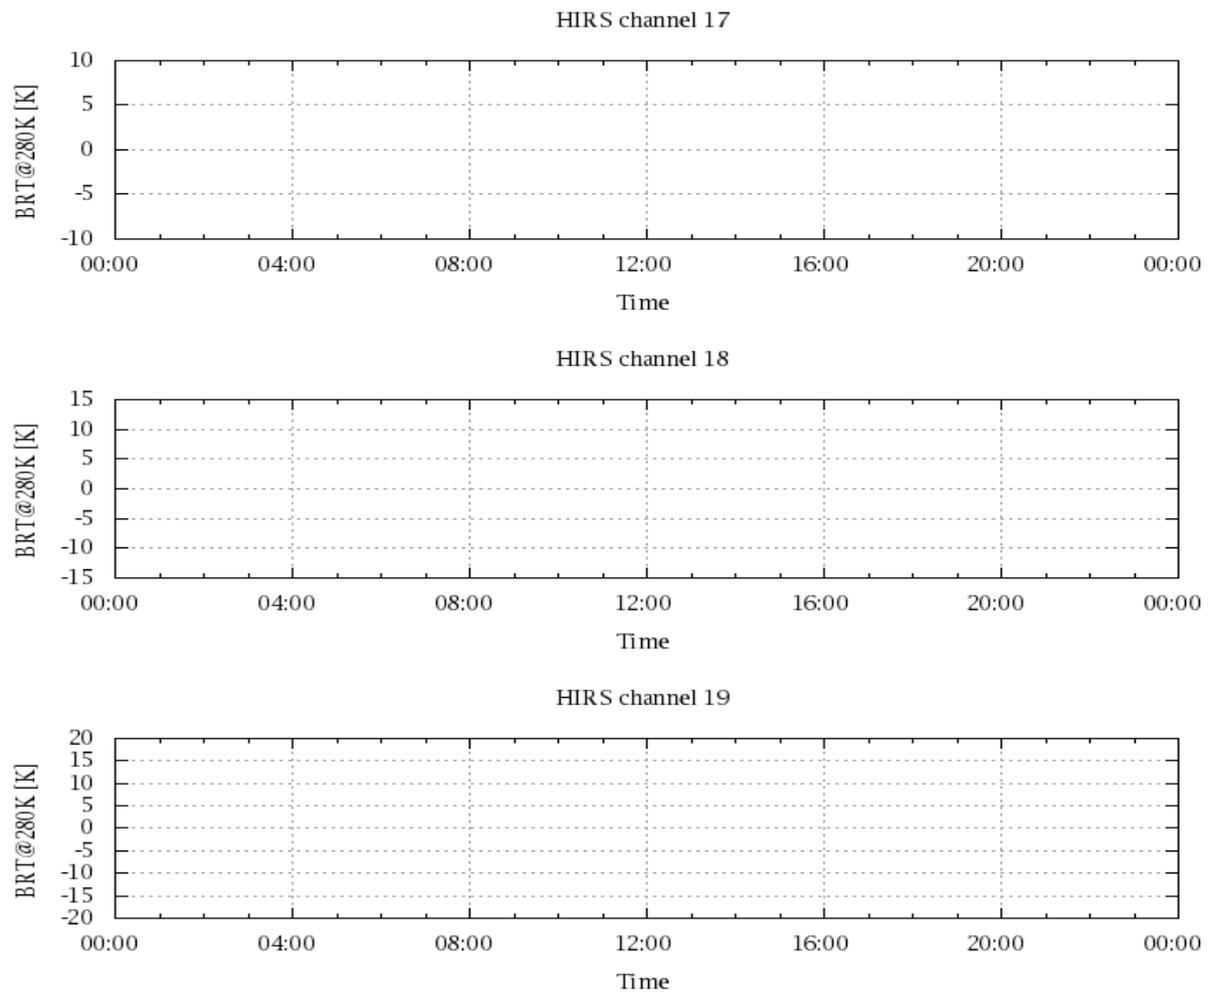


Figure 21: Radinace Differences in BT