

IASI L0 and L1 Daily Monitoring Report **Metop-C**

IASI monitoring team

17/07/2026 00:00:00 - 18/07/2026 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the Metop-C satellite retrieved from the IASI L0 and L1 ENG product (3 minutes data packet) for 17/07/2026 00:00:00 - 18/07/2026 00:00:00 .

The monitoring data are extracted on PDU basis.

2 Data quantity 17/07/2026 00:00:00 - 18/07/2026 00:00:00

Product Type	Number	Action
L0 HKTU PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	0	e
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	29	31	20260717002022.445	20260717002022.879
PX1 (130)	4358	4360	20260717003937.874	20260717003938.307
PX2 (135)	-	-	-	-
PX3 (140)	-	-	-	-
PX4 (145)	1066	1068	20260717002459.629	20260717002500.058
IMG (150)	1462	1464	20260717003851.604	20260717003852.038
IMG (150)	1657	1659	20260717003937.659	20260717003938.092
VER (160)	16381	0	20260717002015.742	20260717002023.742
VER (160)	2	16382	20260717002023.742	20260717002023.742
VER (160)	-1	3	20260717002023.742	20260717002031.742
VER (160)	16382	0	20260717073711.686	20260717073719.686
VER (160)	3	16383	20260717073719.686	20260717073719.686
VER (160)	-1	4	20260717073719.686	20260717073727.686
VER (160)	16379	0	20260717221055.611	20260717221103.611
VER (160)	0	16380	20260717221103.611	20260717221103.611
VER (160)	-1	1	20260717221103.611	20260717221111.611
VER (160)	883	885	20260717223439.613	20260717223439.613
AUX (180)	-	-	-	-

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
17/07/2026 00:00:01	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.64 %	-
GQisFlagQual set (PX2)	99.69 %	-
GQisFlagQual set (PX3)	99.70 %	-
GQisFlagQual set (PX4)	99.63 %	-
GQisFlagQual set (all)	99.67 %	-

Table 4: Quality flags

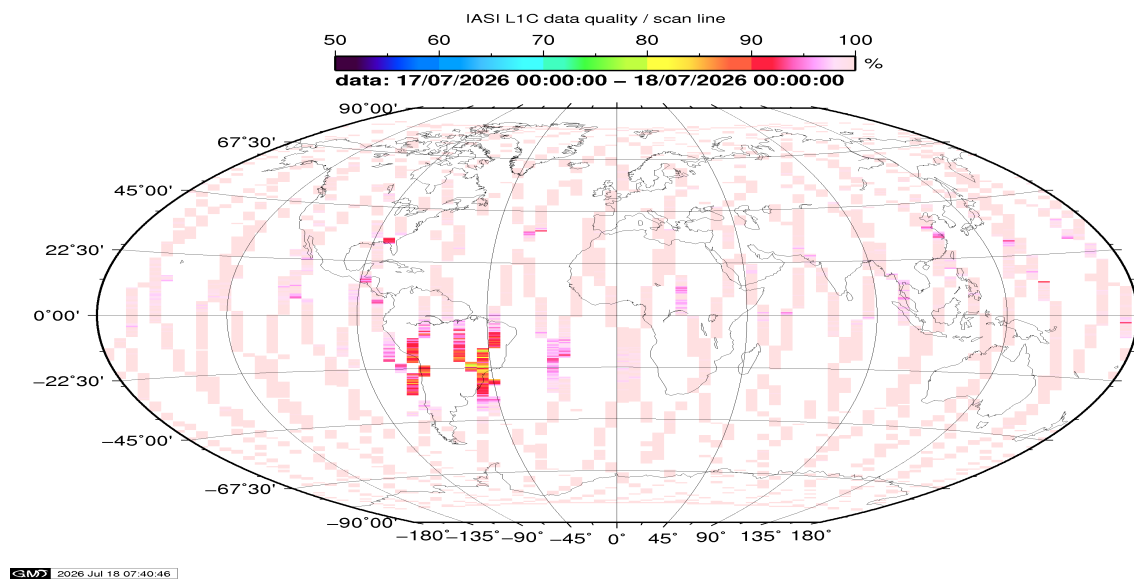


Figure 1: L1C data quality

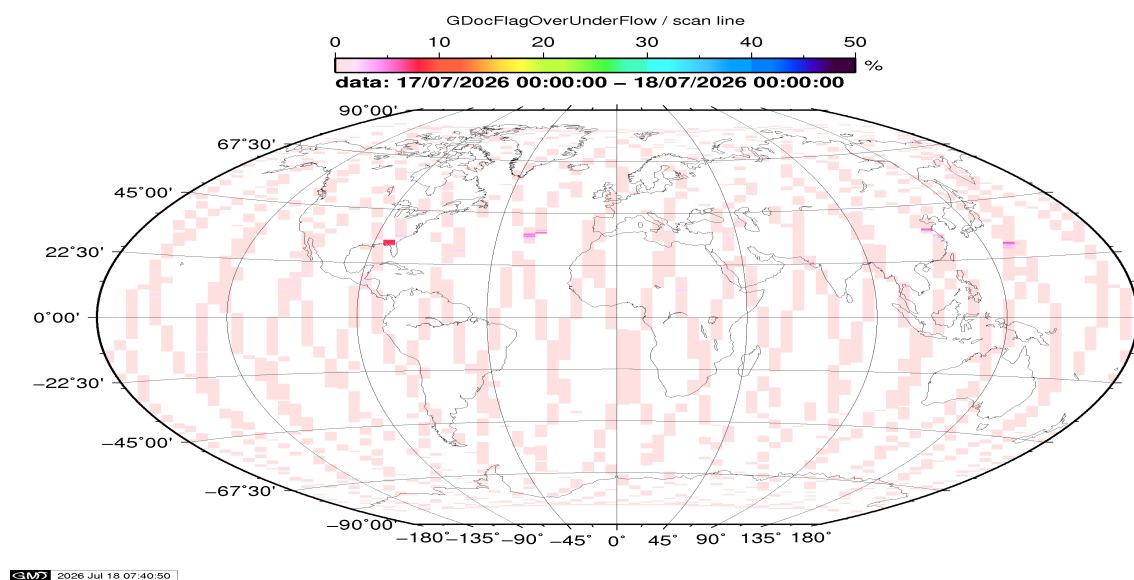


Figure 2: Flag of Over and Under Flows

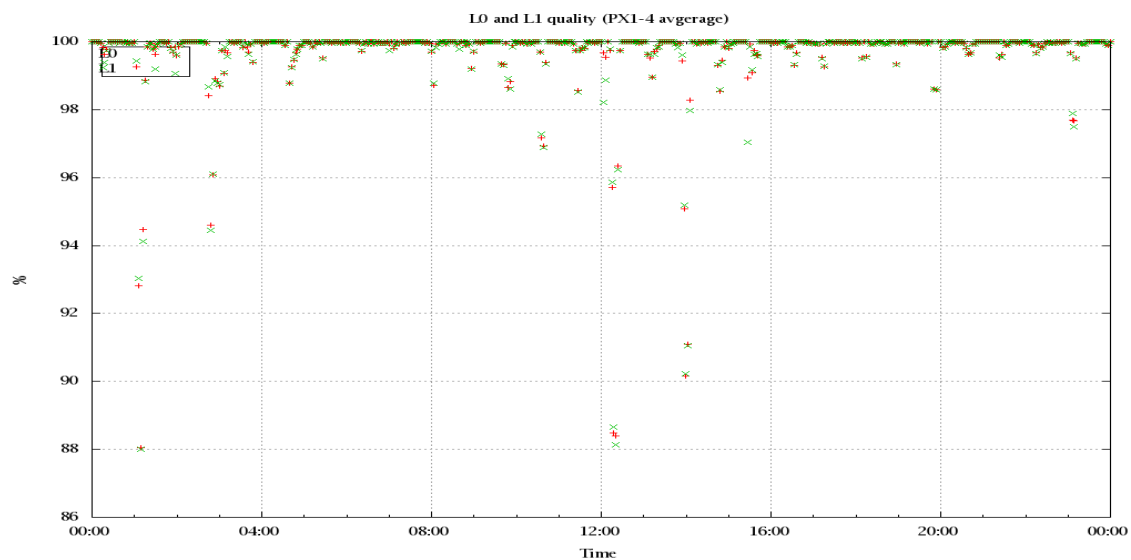


Figure 3: Level 0 and 1C overall quality

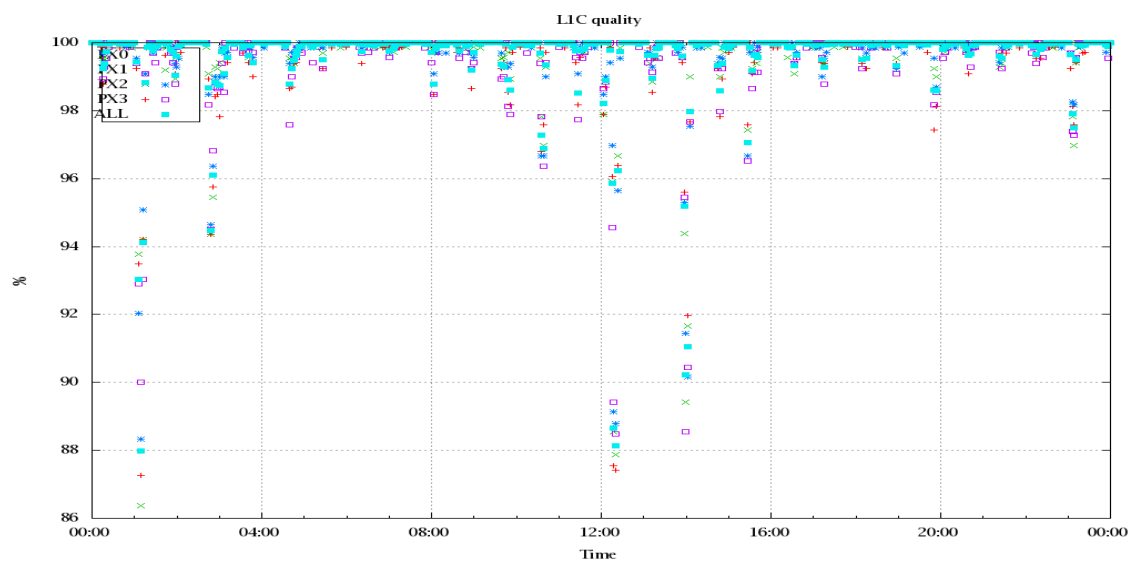


Figure 4: Level 1C quality

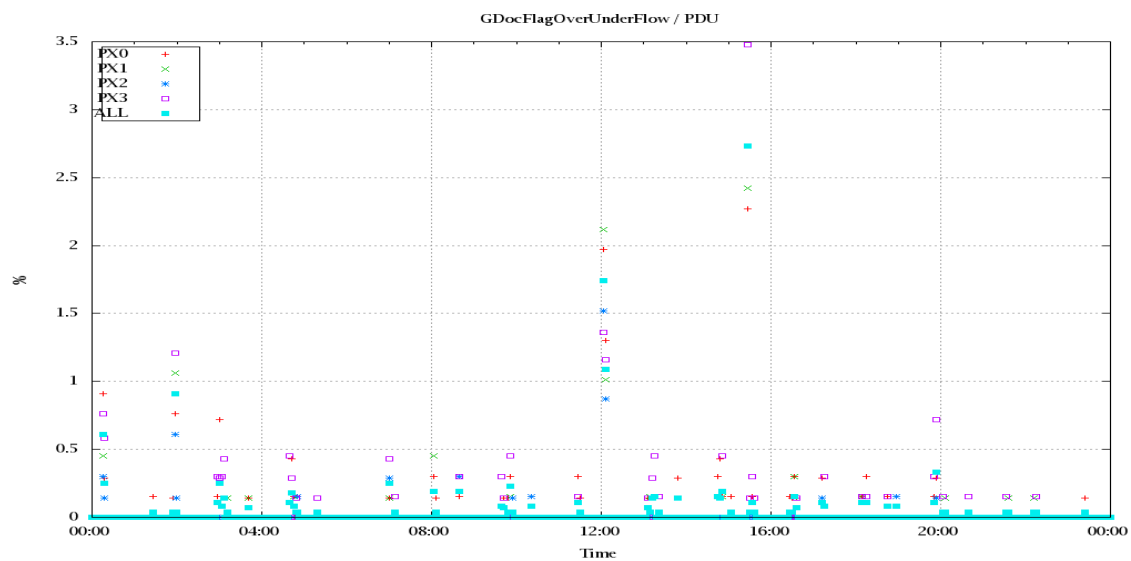


Figure 5: Timeseries of flag of Over and Under Flows

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class).

A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T, water vapor and Ozone. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used.

Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 28 to 34, the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixels and scan positions 10 to 20) and the average bias OBS-CAL (over all pixels and scan positions 10 to 20) of the last 30 days.

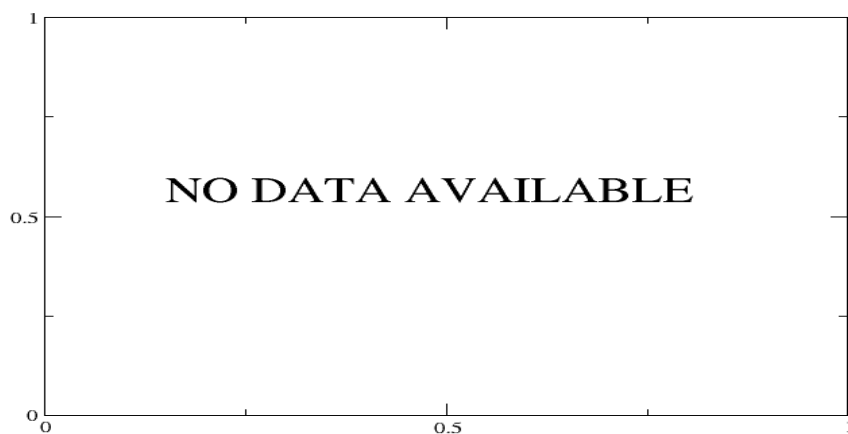


Figure 6: Average Radiance differences: OBS-CAL

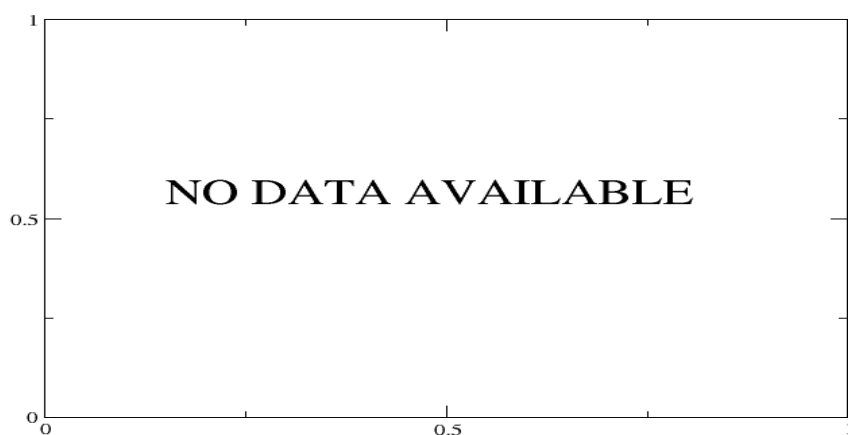


Figure 7: Standard Deviation of Radiance differences



Figure 8: Average Radiance differences: OBS-CAL



Figure 9: Standard Deviation of Radiance differences



Figure 10: Radiance Anomaly in BT: All Channels



Figure 11: Radiance Anomaly in BT: IASI Band 1



Figure 12: Radiance Anomaly in BT: IASI Band 2



Figure 13: Radiance Anomaly in BT: IASI Band 3

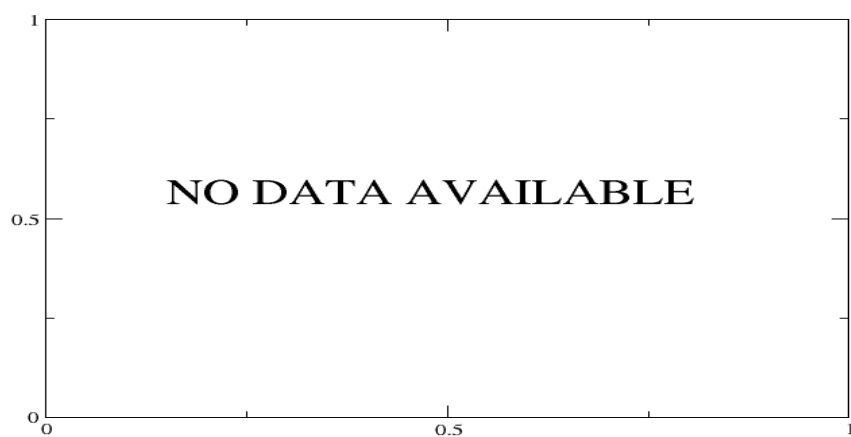


Figure 14: Radiance Anomaly in BT: CO2 14

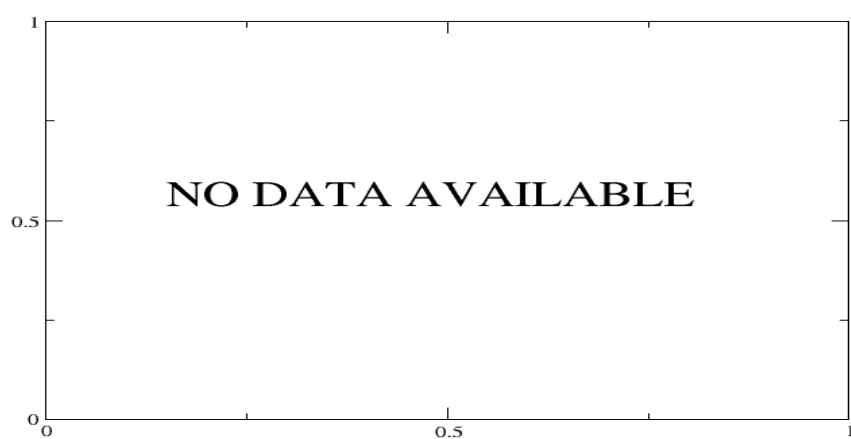


Figure 15: Radiance Anomaly in BT: CO2 4.3



Figure 16: Radiance Anomaly in BT: O3