

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

05/01/2018 00:00:00 - 06/01/2018 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-B satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 05/01/2018 00:00:00 - 06/01/2018 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 05/01/2018 00:00:00 - 06/01/2018 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	478	-
L1 DPX PDUs (RM: IASI-HIRS)	338	e
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	9264	9266	20180105014213.836	20180105014214.265
PX1 (130)	9155	9164	20180105131644.269	20180105131646.214
PX1 (130)	9192	9194	20180105131653.781	20180105131654.214
PX1 (130)	9199	9214	20180105131655.296	20180105131700.050
PX2 (135)	1277	1279	20180105010644.347	20180105010644.776
PX2 (135)	10382	10384	20180105014711.558	20180105014711.988
PX2 (135)	9155	9163	20180105131644.269	20180105131645.996
PX2 (135)	9194	9196	20180105131654.214	20180105131654.644
PX2 (135)	9199	9213	20180105131655.296	20180105131659.835
PX3 (140)	10006	10008	20180105014532.101	20180105014532.531
PX3 (140)	10194	10196	20180105014621.828	20180105014622.261
PX3 (140)	9155	9163	20180105131644.269	20180105131645.996
PX3 (140)	9199	9213	20180105131655.296	20180105131659.835
PX4 (145)	10006	10008	20180105014532.101	20180105014532.531
PX4 (145)	9155	9163	20180105131644.269	20180105131645.996
PX4 (145)	9196	9198	20180105131654.644	20180105131655.078
PX4 (145)	9199	9213	20180105131655.296	20180105131659.835
IMG (150)	7863	7865	20180105021201.497	20180105021201.927

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
IMG (150)	3902	3911	20180105131644.050	20180105131645.996
IMG (150)	3943	3945	20180105131653.566	20180105131653.999
IMG (150)	3948	3950	20180105131654.644	20180105131655.078
IMG (150)	3950	3969	20180105131655.078	20180105131659.835
VER (160)	14291	14293	20180105020745.935	20180105020753.935
VER (160)	5753	5759	20180105131649.890	20180105131705.890
AUX (180)	10975	10977	20180105131650.320	20180105131706.320

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
05/01/2018 00:00:07	-	Normal operation
05/01/2018 05:36:39	External calibration	Auxiliary ASE synchronised
05/01/2018 05:38:31	Auxiliary ASE synchronised	Normal operation
05/01/2018 06:52:07	Normal operation	Auxiliary ASE synchronised
05/01/2018 07:21:43	External calibration	Auxiliary ASE synchronised
05/01/2018 07:23:35	Auxiliary ASE synchronised	Normal operation
05/01/2018 08:31:19	Normal operation	Auxiliary ASE synchronised
05/01/2018 08:33:11	Auxiliary ASE synchronised	External calibration
05/01/2018 09:08:07	External calibration	Auxiliary ASE synchronised
05/01/2018 09:10:15	Auxiliary ASE synchronised	Normal operation
05/01/2018 10:13:43	Normal operation	Auxiliary ASE synchronised
05/01/2018 10:15:51	Auxiliary ASE synchronised	External calibration
05/01/2018 10:50:31	External calibration	Auxiliary ASE synchronised
05/01/2018 10:52:23	Auxiliary ASE synchronised	Normal operation
05/01/2018 12:56:23	External calibration	Auxiliary ASE synchronised
05/01/2018 12:58:15	Auxiliary ASE synchronised	Normal operation
05/01/2018 14:38:47	External calibration	Auxiliary ASE synchronised
05/01/2018 14:40:39	Auxiliary ASE synchronised	Normal operation
05/01/2018 15:31:19	Normal operation	Auxiliary ASE synchronised
05/01/2018 15:33:11	Auxiliary ASE synchronised	External calibration
05/01/2018 16:21:43	External calibration	Auxiliary ASE synchronised
05/01/2018 16:23:51	Auxiliary ASE synchronised	Normal operation
05/01/2018 17:20:23	Normal operation	Auxiliary ASE synchronised
05/01/2018 17:22:31	Auxiliary ASE synchronised	External calibration
05/01/2018 18:07:03	External calibration	Auxiliary ASE synchronised
05/01/2018 18:08:55	Auxiliary ASE synchronised	Normal operation
05/01/2018 19:08:23	Normal operation	Auxiliary ASE synchronised
05/01/2018 19:10:31	Auxiliary ASE synchronised	External calibration
05/01/2018 19:41:59	External calibration	Auxiliary ASE synchronised
05/01/2018 19:44:07	Auxiliary ASE synchronised	Normal operation
05/01/2018 21:19:51	Normal operation	Auxiliary ASE synchronised
05/01/2018 21:21:43	Auxiliary ASE synchronised	External calibration
05/01/2018 21:44:07	External calibration	Auxiliary ASE synchronised
05/01/2018 21:46:15	Auxiliary ASE synchronised	Normal operation
05/01/2018 23:02:15	Normal operation	Auxiliary ASE synchronised
05/01/2018 23:04:23	Auxiliary ASE synchronised	External calibration
05/01/2018 23:31:19	External calibration	Auxiliary ASE synchronised
05/01/2018 23:33:27	Auxiliary ASE synchronised	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	478	-
GQisFlagQual set (PX1)	99.20 %	-
GQisFlagQual set (PX2)	98.15 %	-
GQisFlagQual set (PX3)	98.82 %	-
GQisFlagQual set (PX4)	98.98 %	-
GQisFlagQual set (all)	98.79 %	-

Table 4: Quality flags

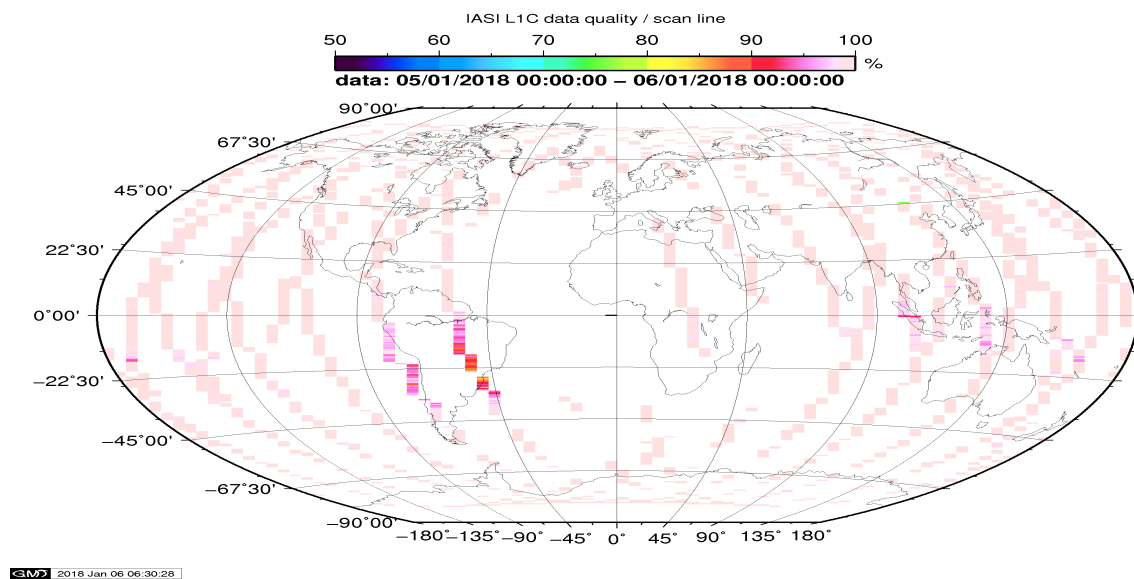


Figure 1: L1C data quality

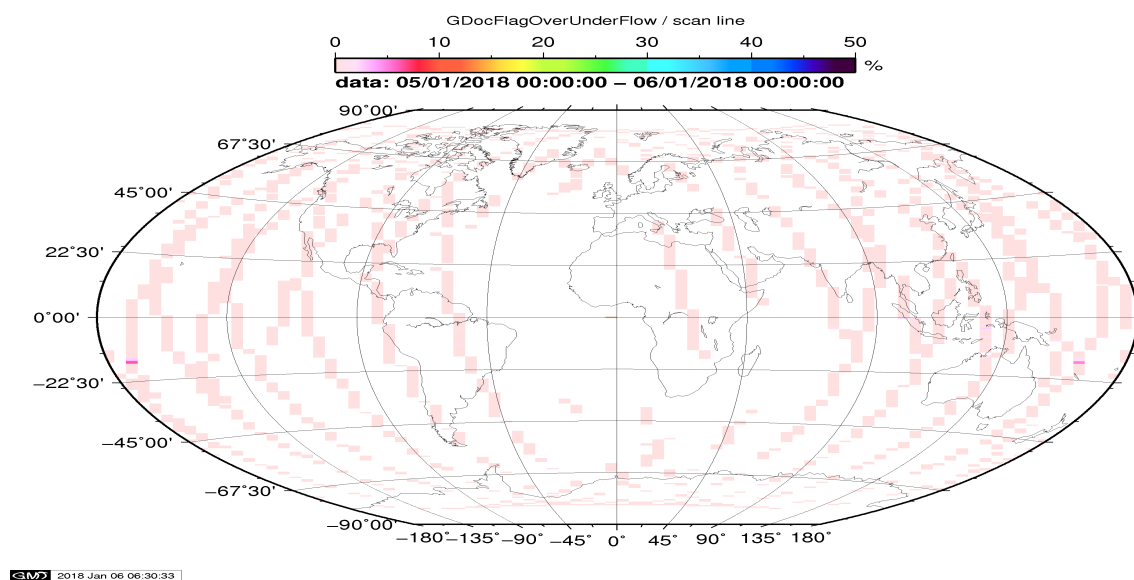


Figure 2: Flag of Over and Under Flows

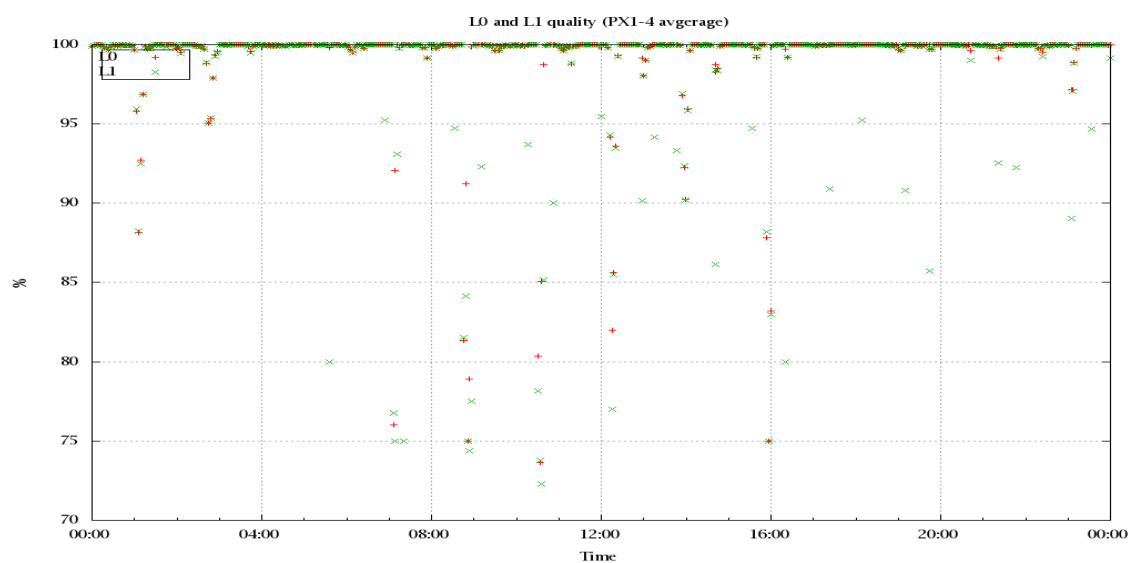


Figure 3: Level 0 and 1C overall quality

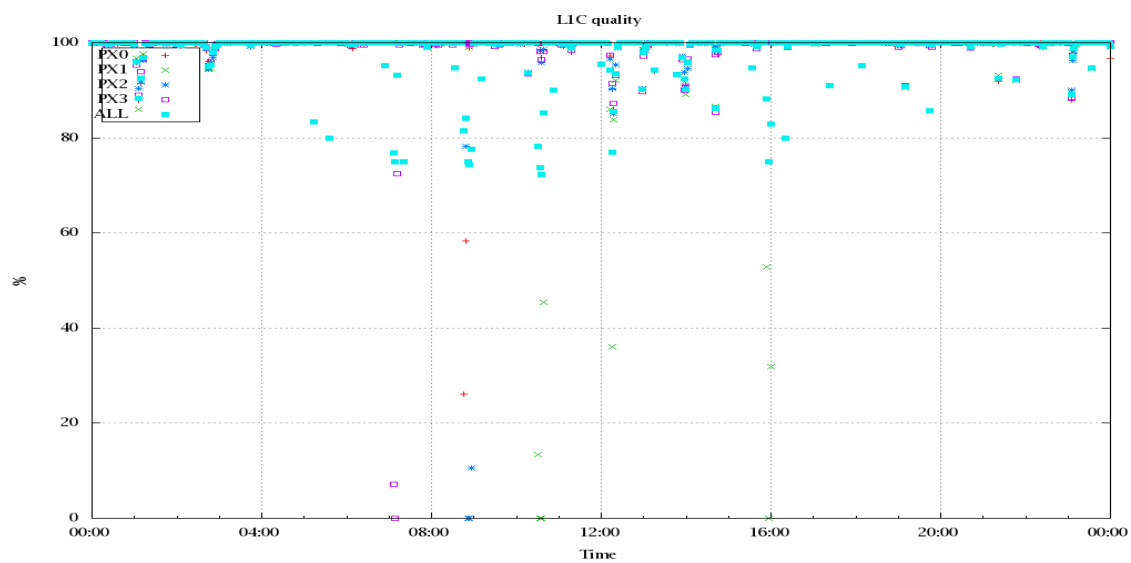


Figure 4: Level 1C quality

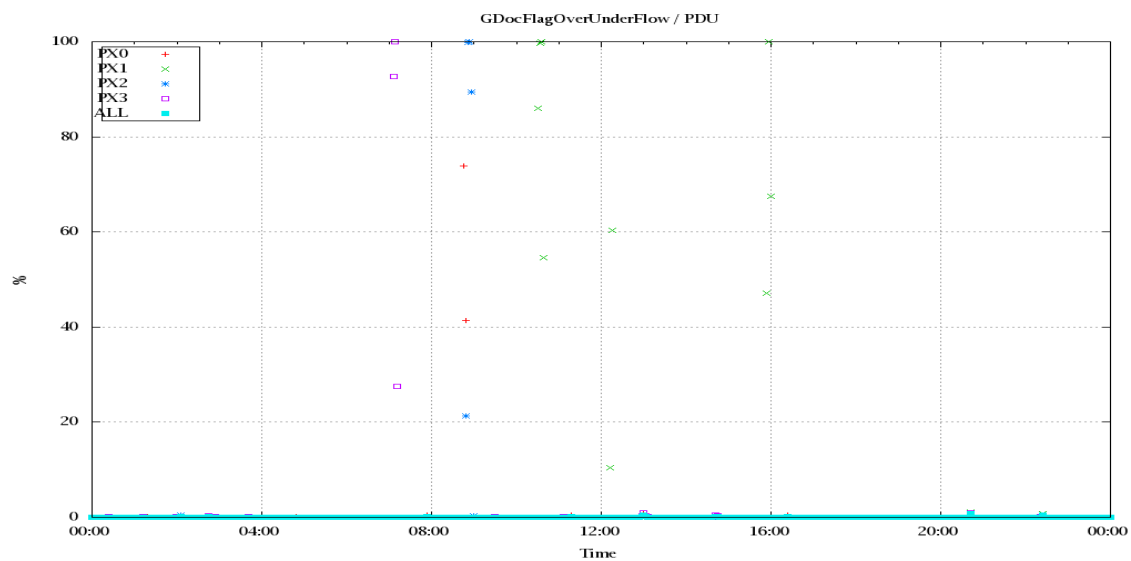


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

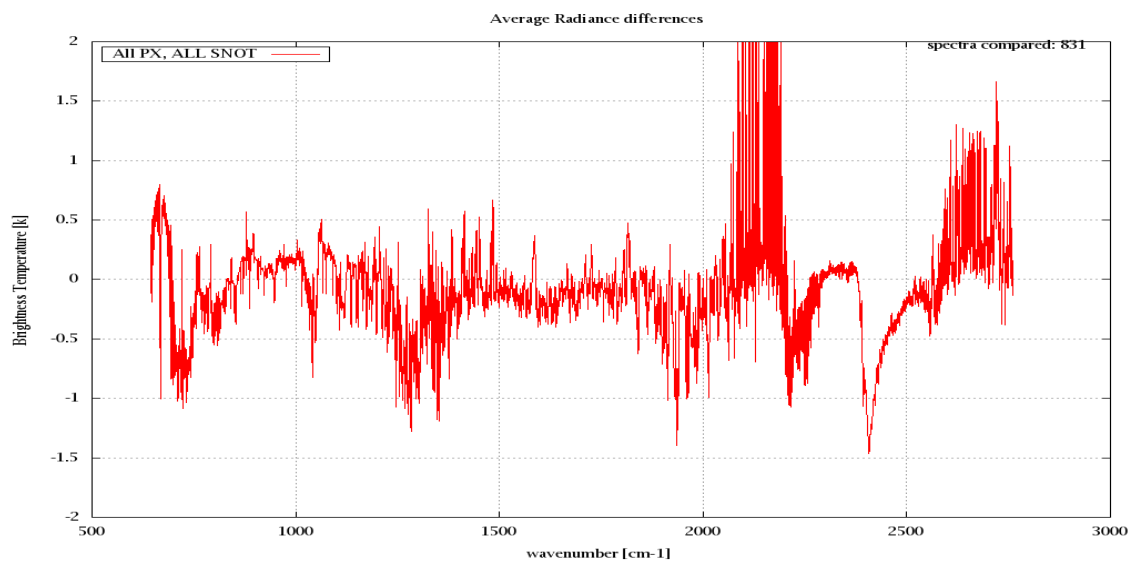


Figure 6: Average Radiance differences: OBS-CAL

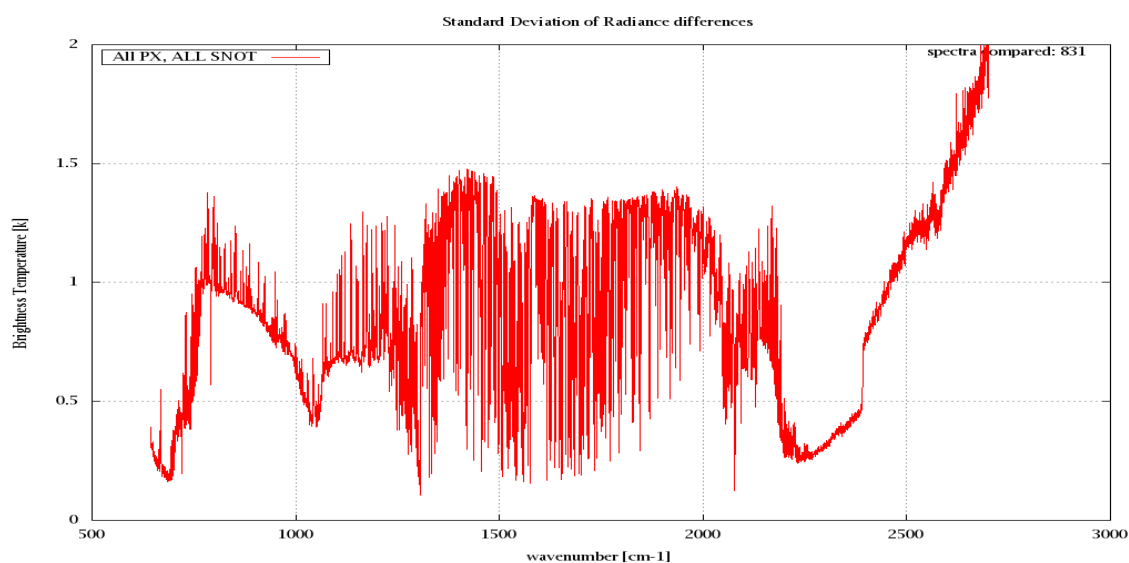


Figure 7: Standard Deviation of Radiance differences

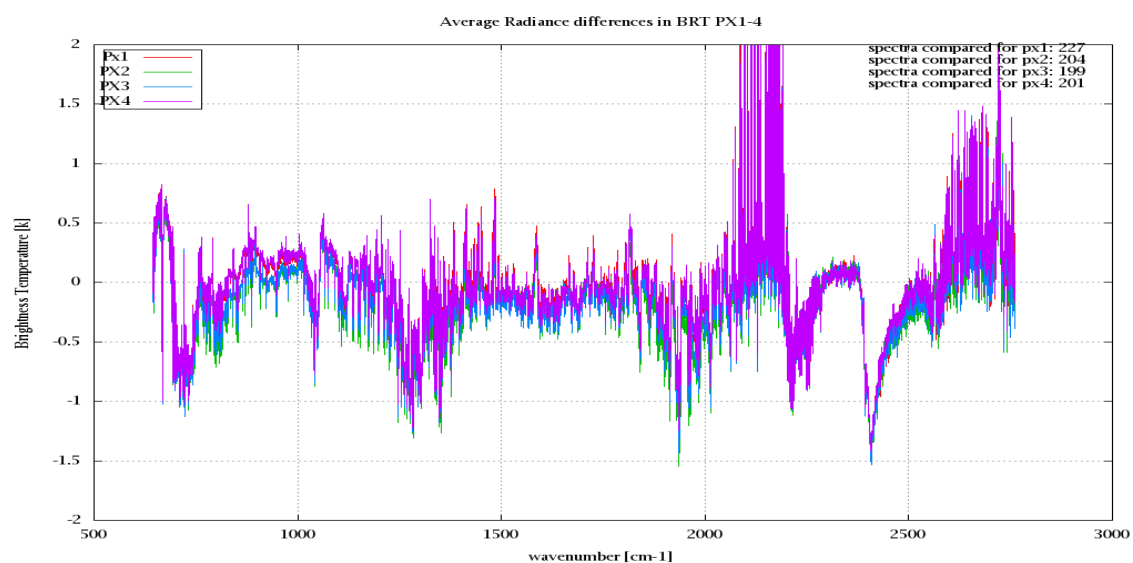


Figure 8: Average Radiance differences: OBS-CAL

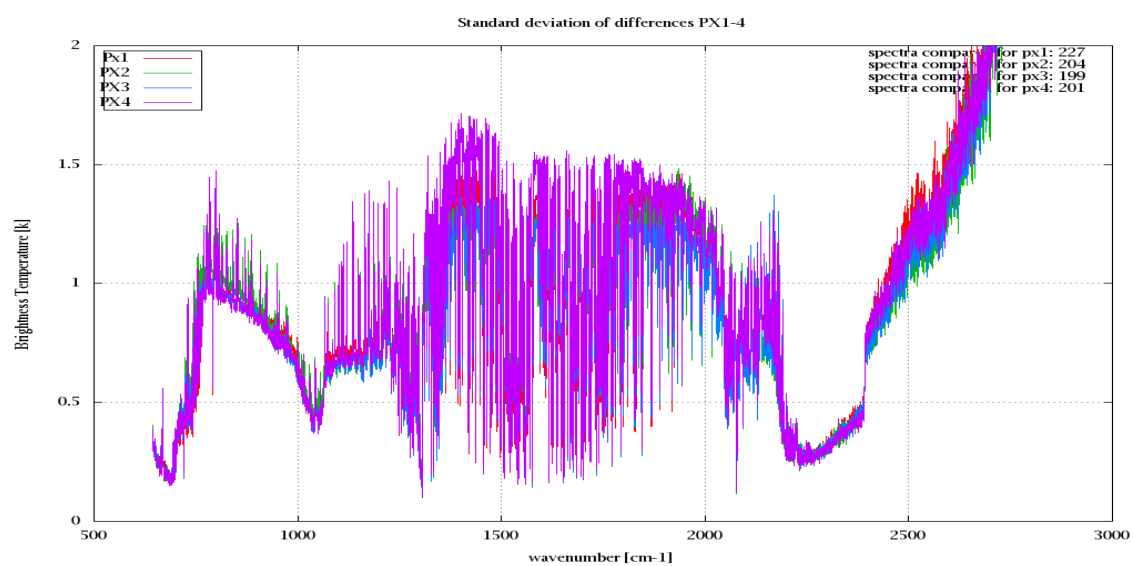


Figure 9: Standard Deviation of Radiance differences

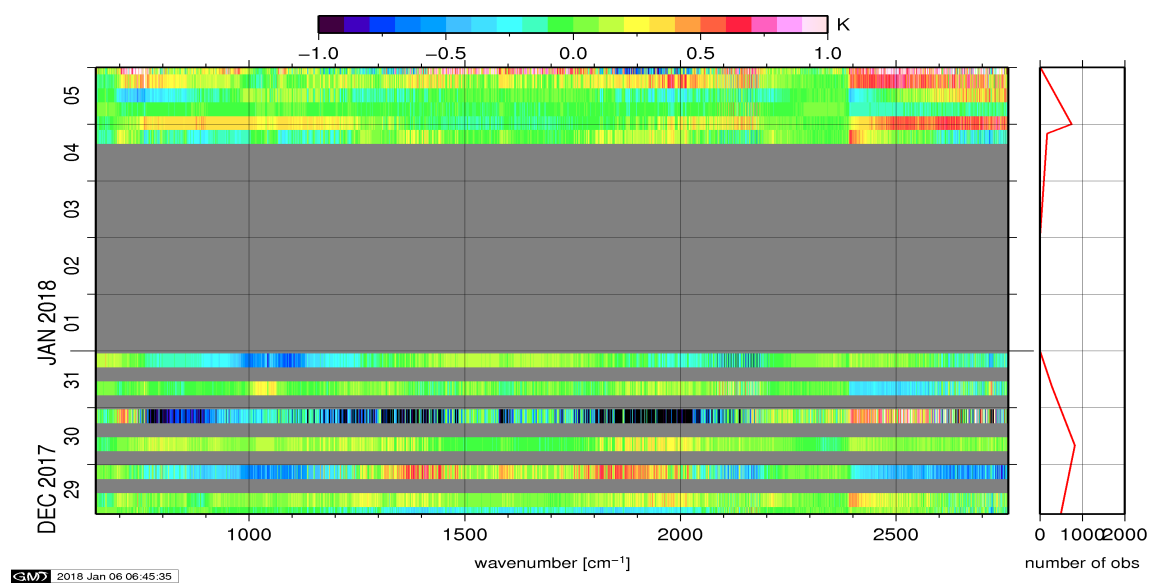


Figure 10: Radiance Anomaly in BRT: All Channels

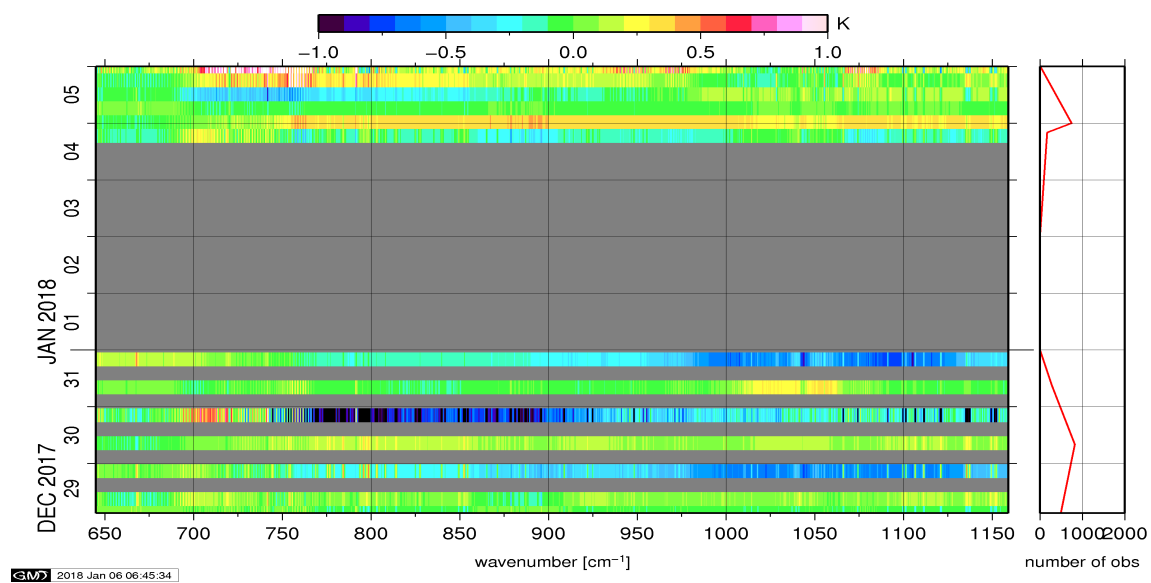


Figure 11: Radiance Anomaly in BRT: IASI Band 1

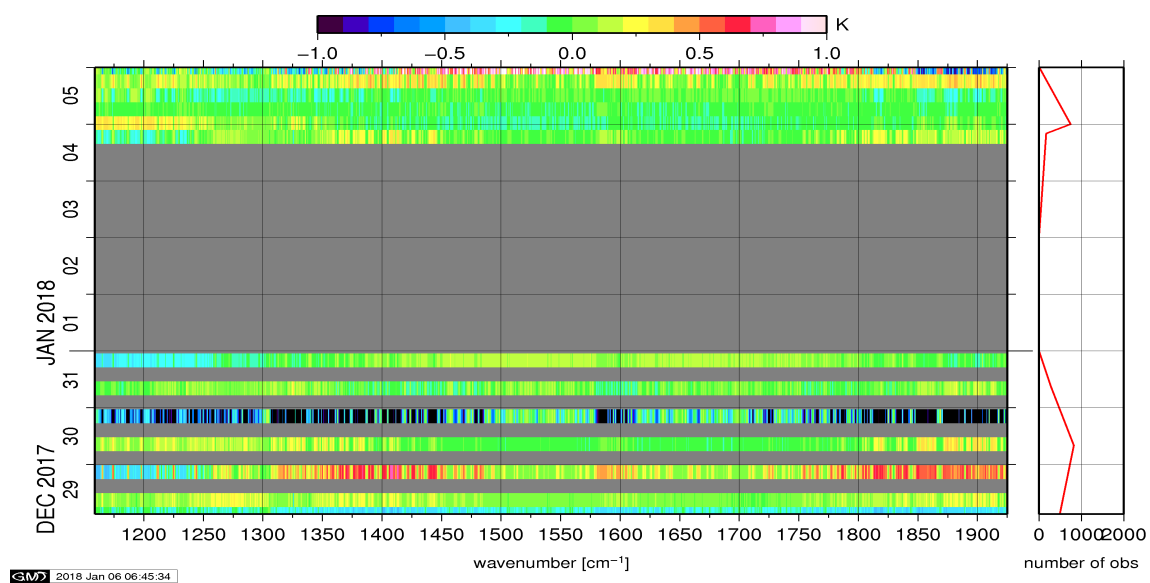


Figure 12: Radiance Anomaly in BRT: IASI Band 2

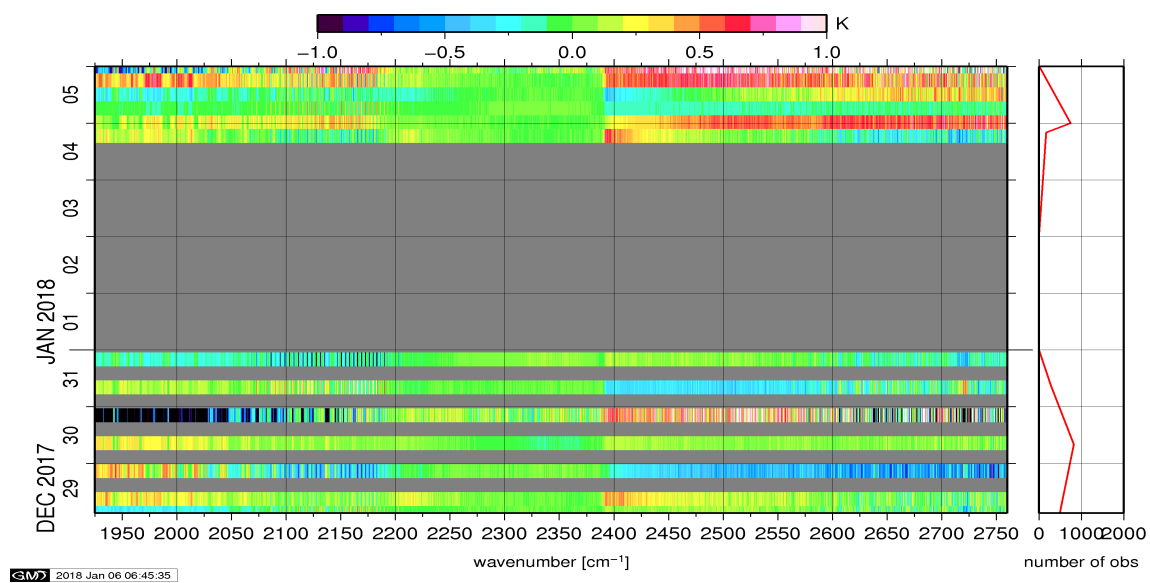


Figure 13: Radiance Anomaly in BRT: IASI Band 3

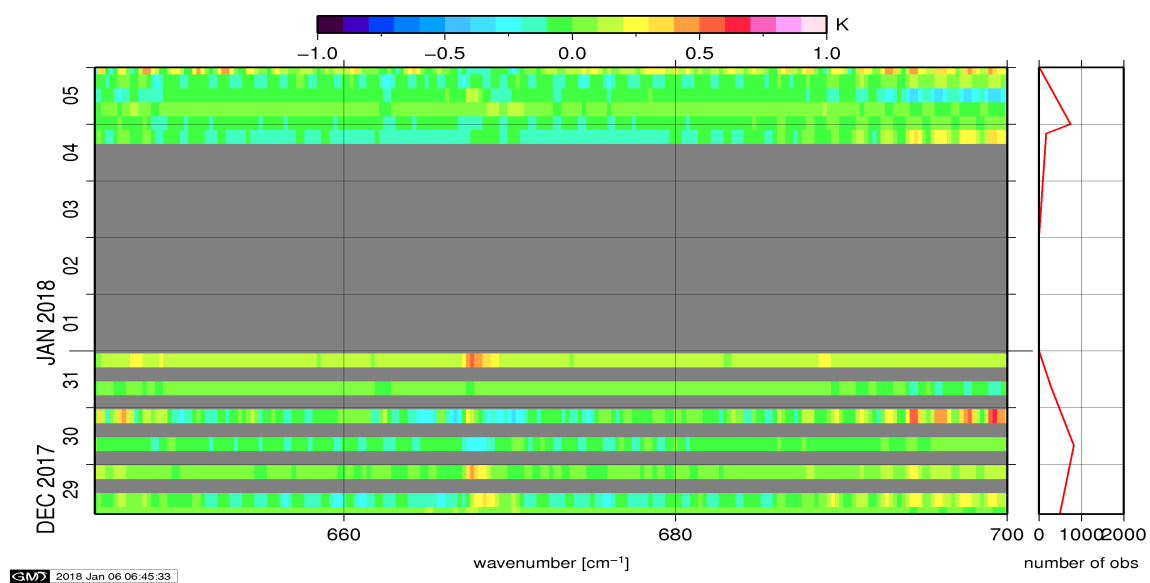


Figure 14: Radiance Anomaly in BRT: CO2 14

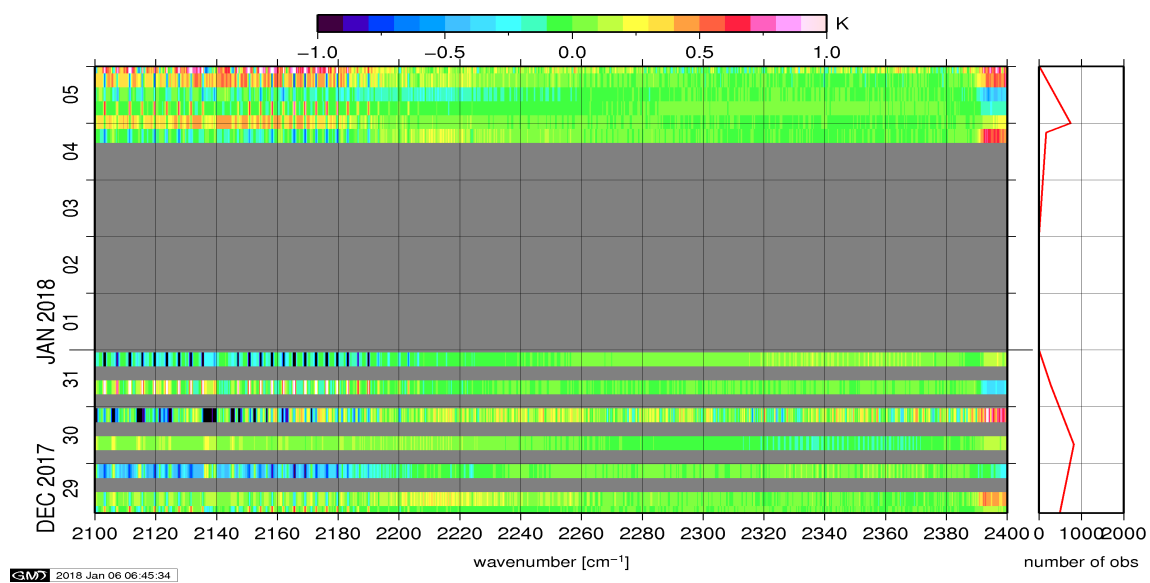


Figure 15: Radiance Anomaly in BRT: CO2 4.3

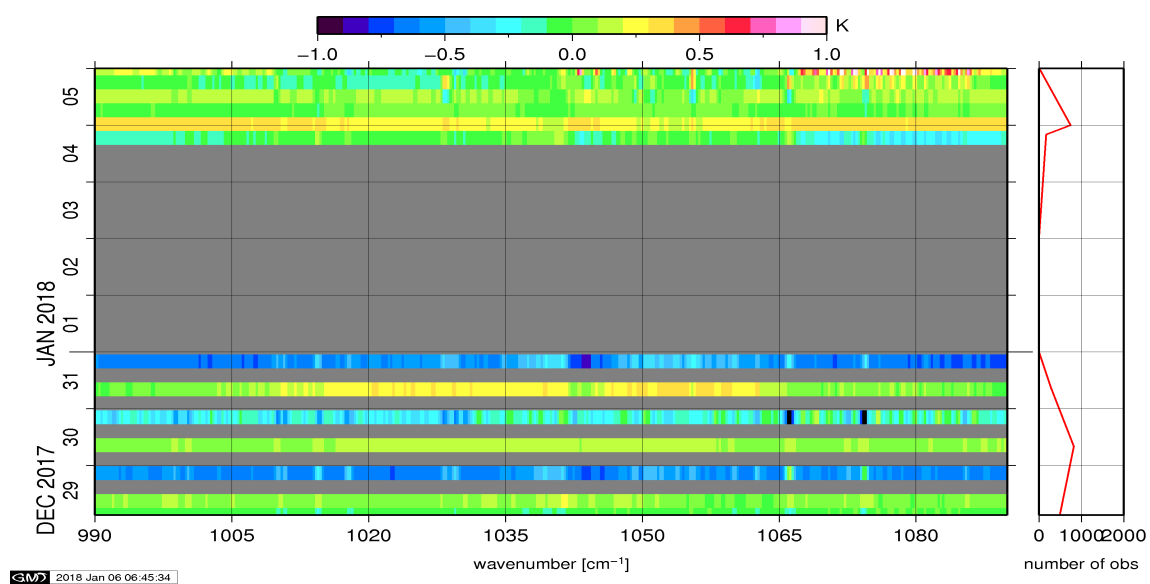


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

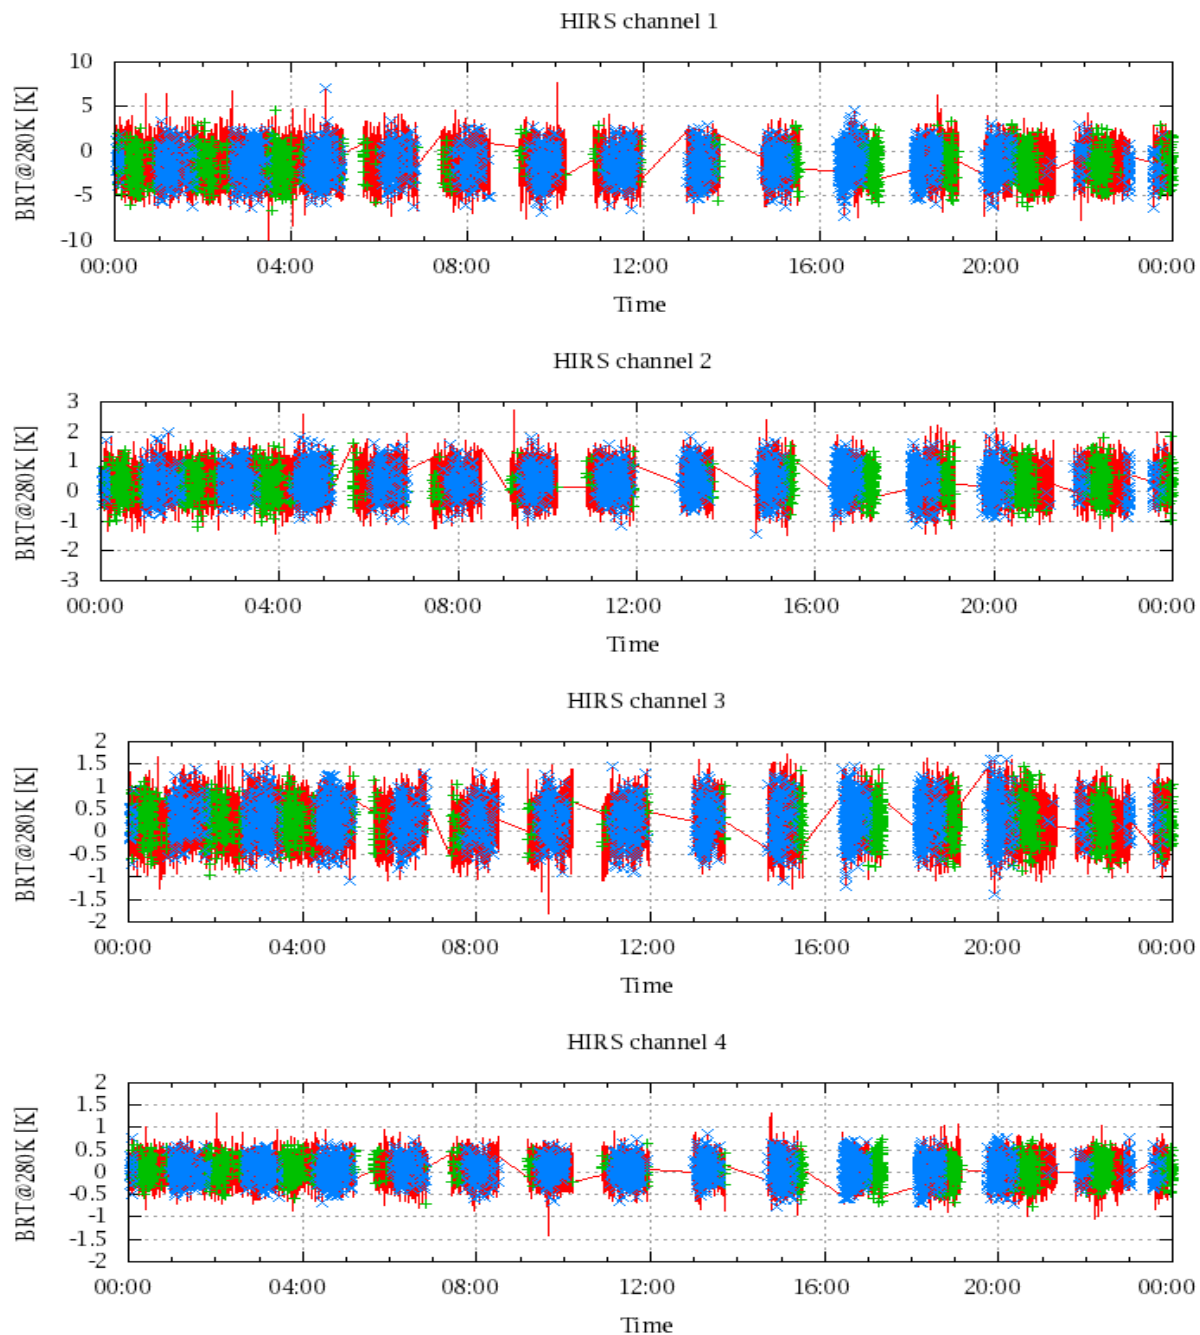


Figure 17: Radiance Differences in BRT

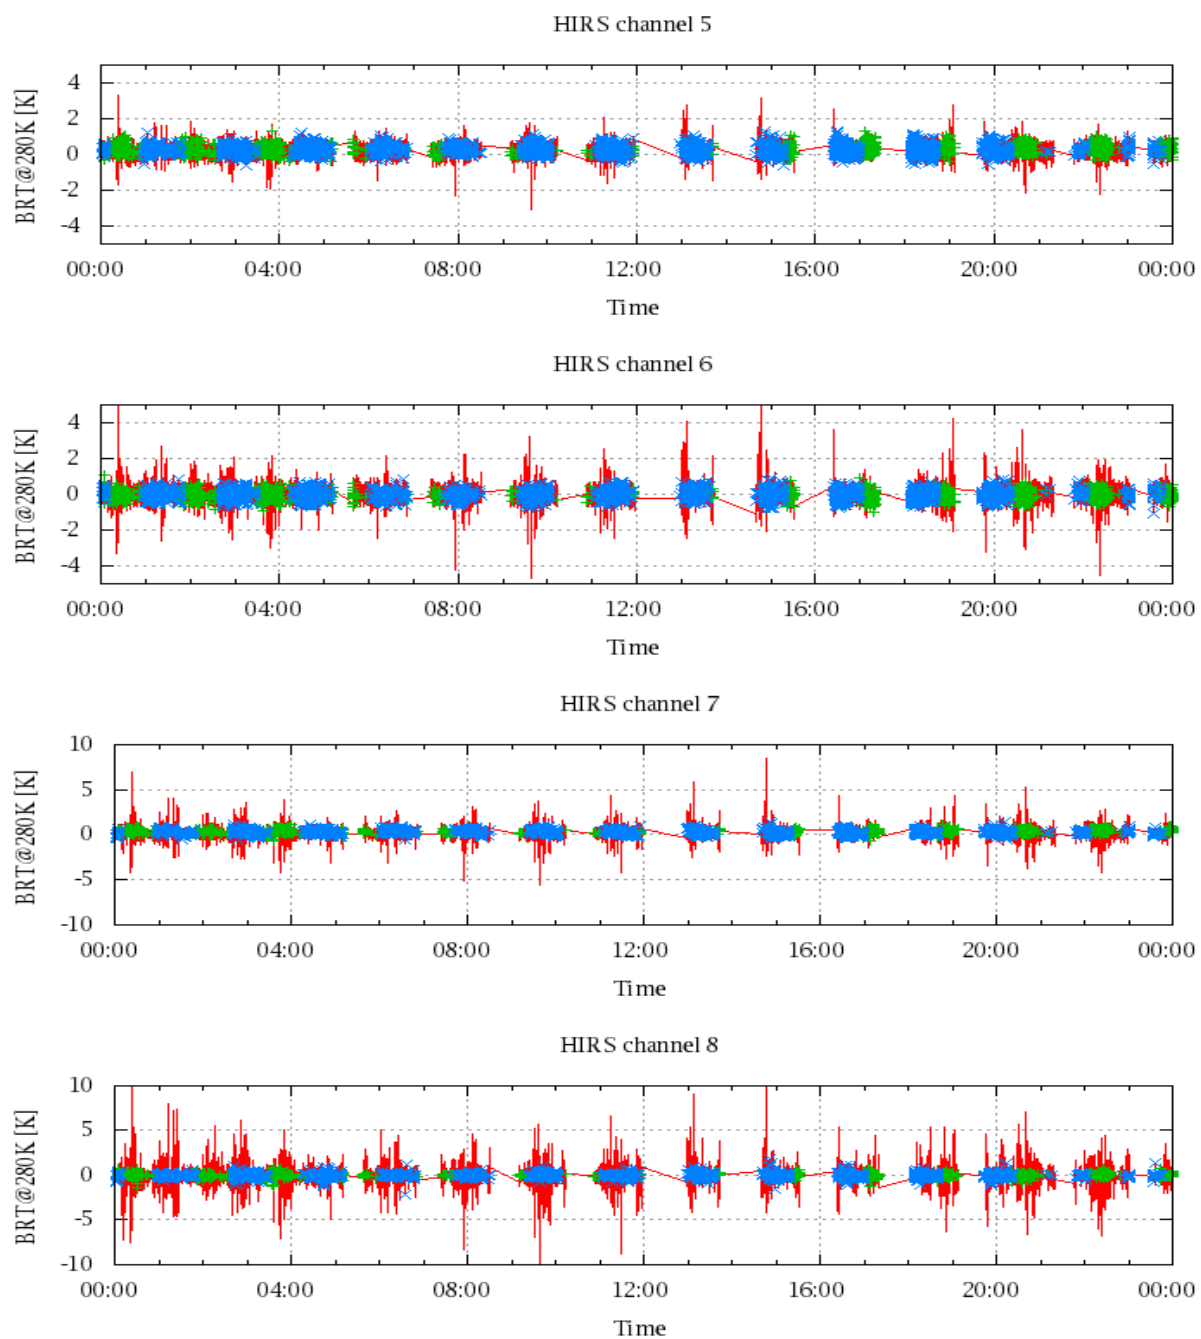


Figure 18: Radiance Differences in BRT

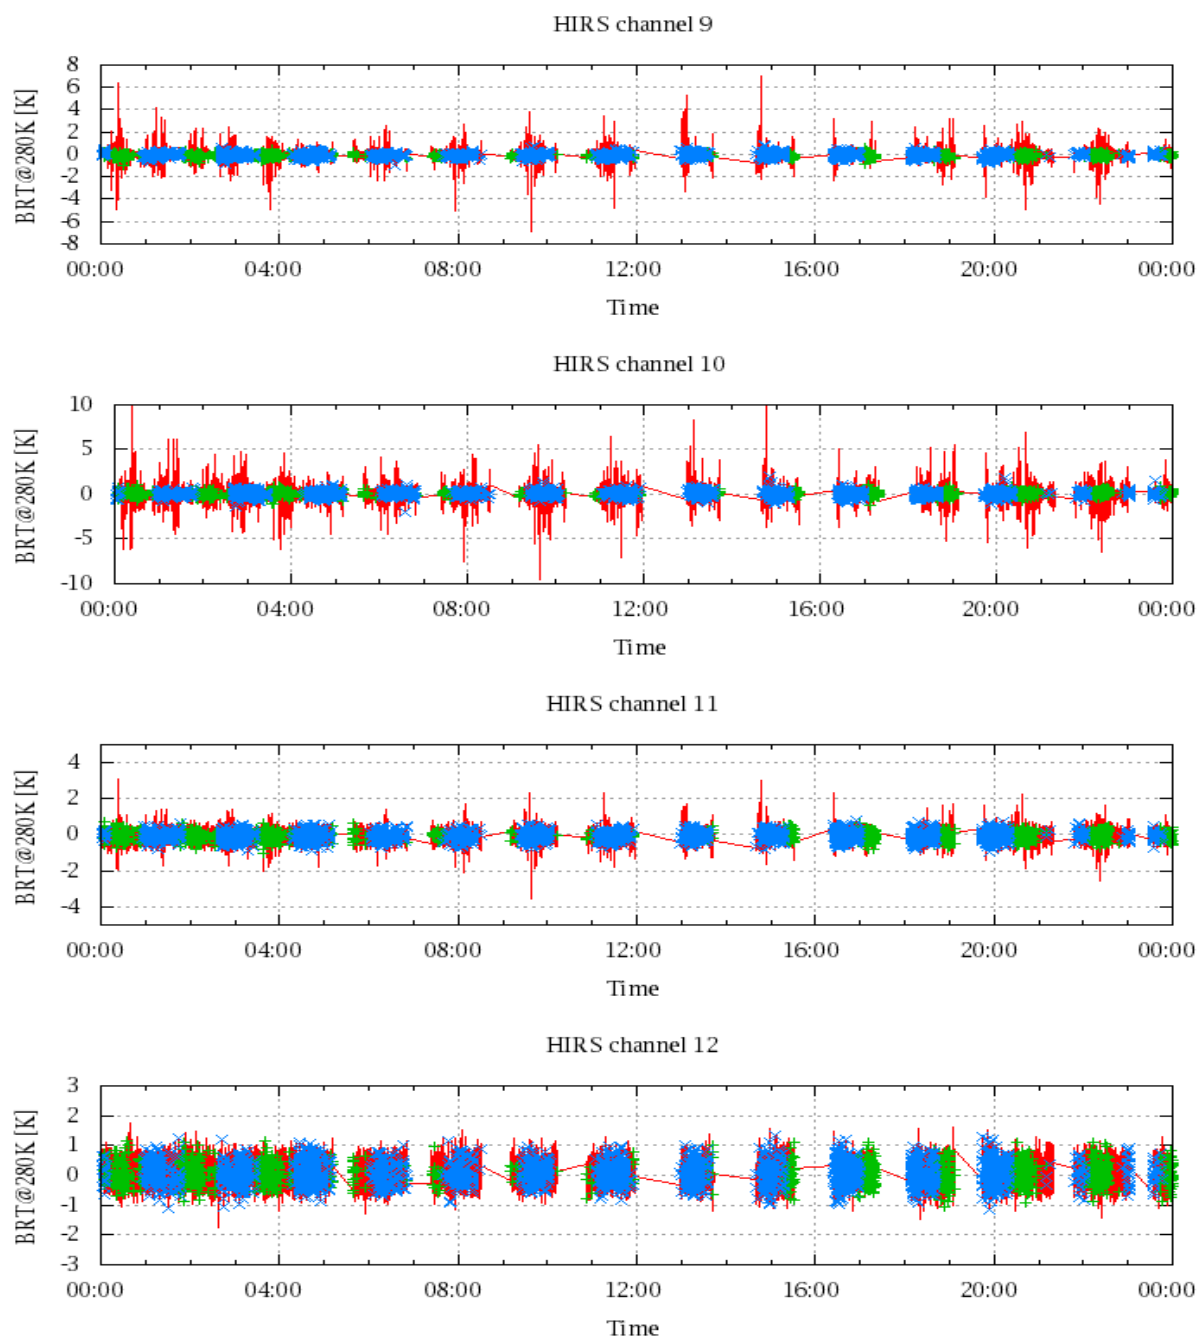


Figure 19: Radiance Differences in BRT

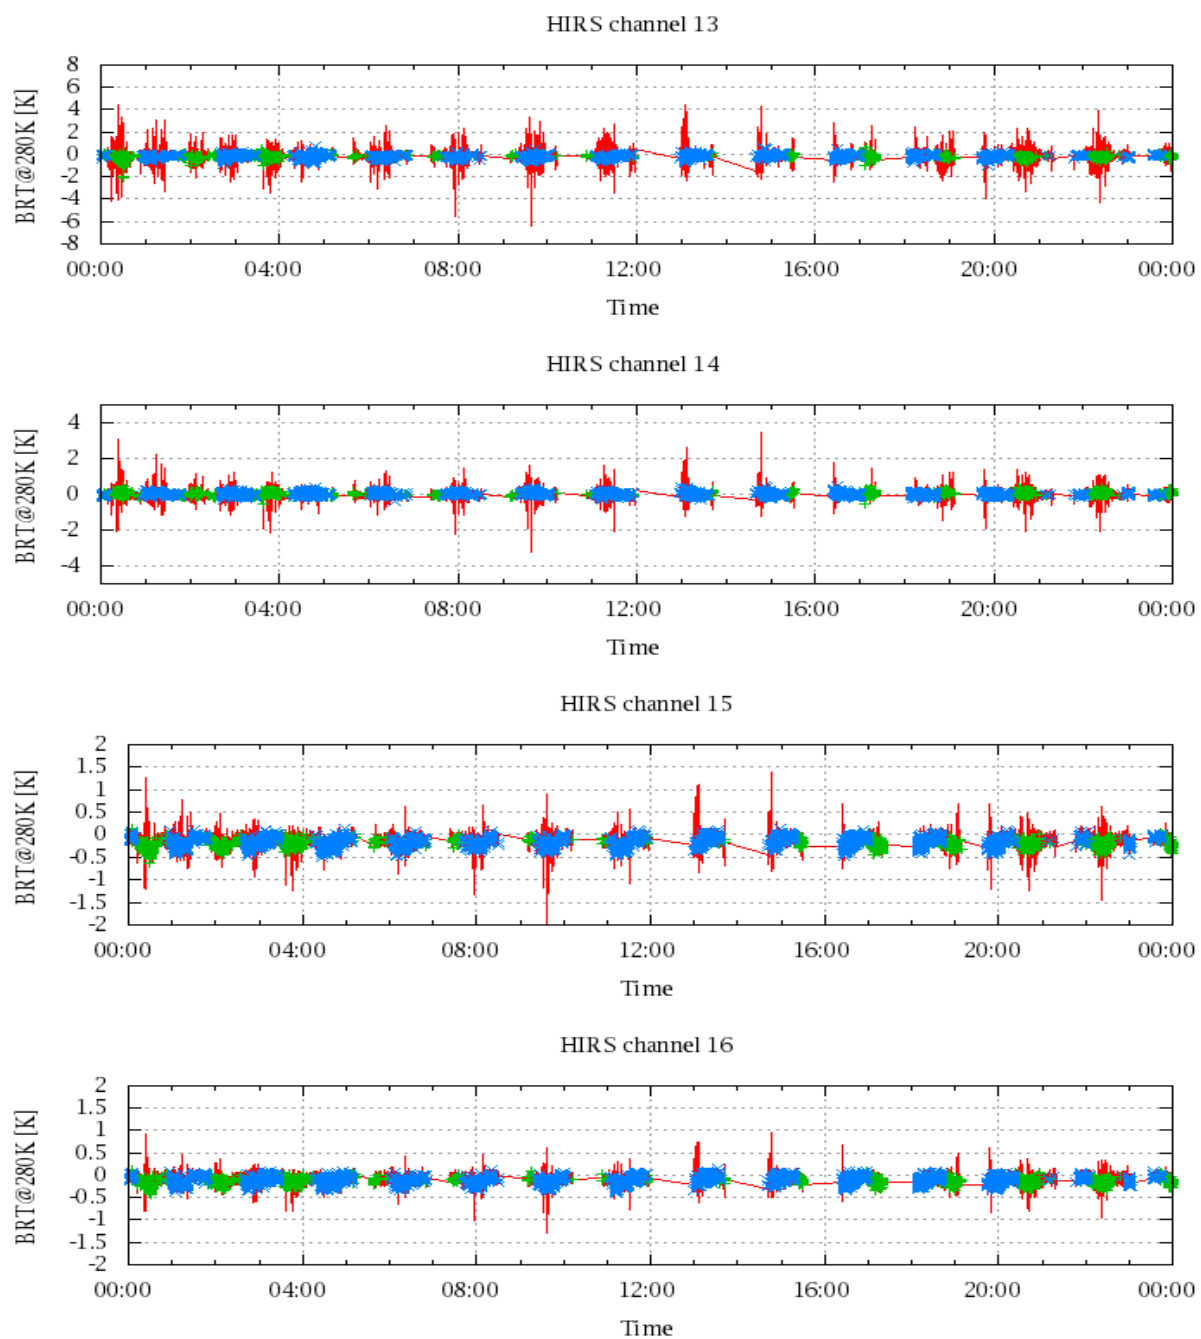


Figure 20: Radiance Differences in BRT

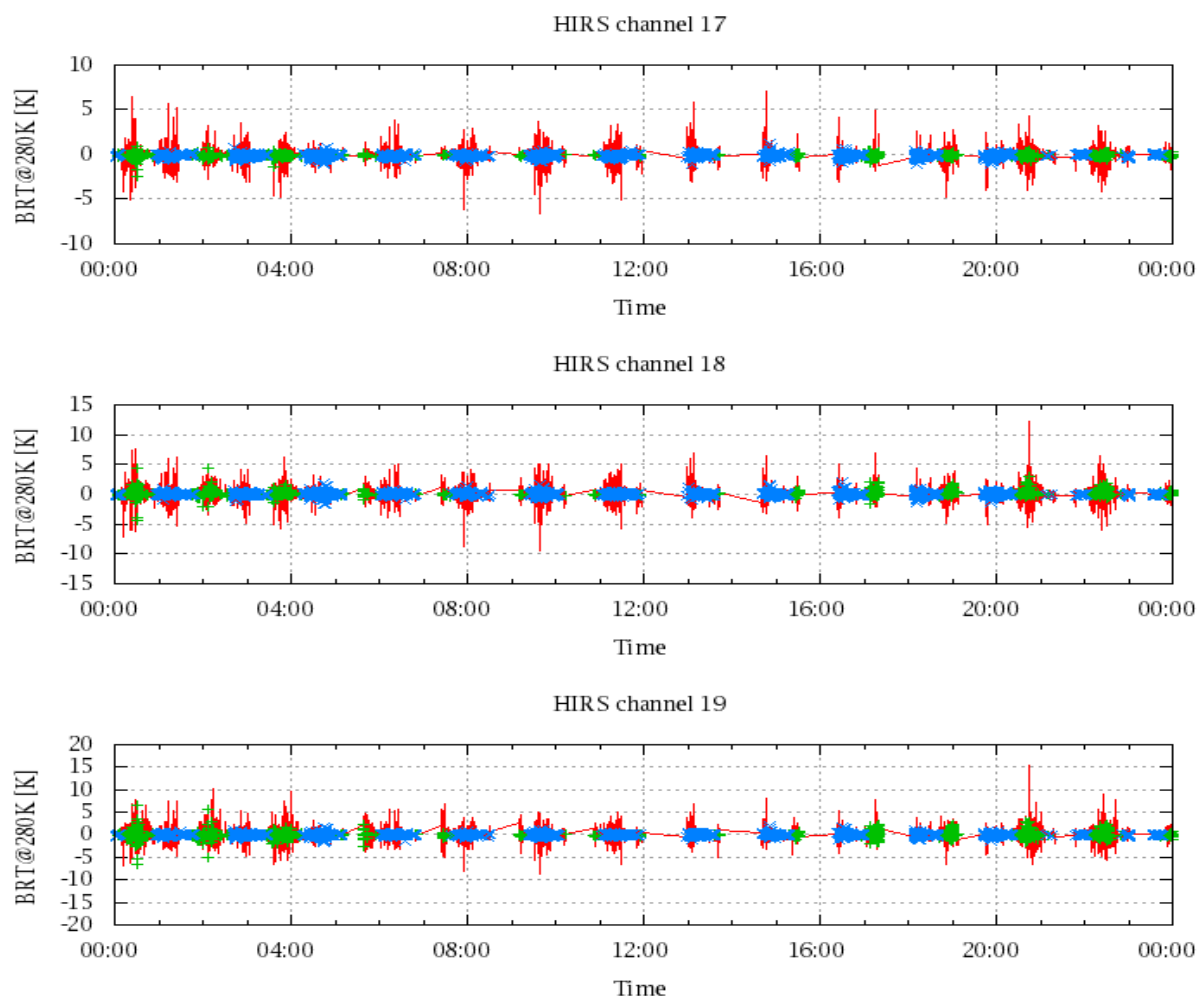


Figure 21: Radinace Differences in BRT