

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

18/08/2011 00:00:00 - 19/08/2011 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-A satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 18/08/2011 00:00:00 - 19/08/2011 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 18/08/2011 00:00:00 - 19/08/2011 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	277	e
L1 ENG PDUs	276	e
L1 ENG distinct GEPSGranule	277	a
L1 DPX PDUs (RM: IASI-HIRS)	187	e
L1 DPS Files (RM: OBS-CAL NWP based)	276	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	12311	0	20110818082144.075	20110818183612.532
PX2 (135)	12311	0	20110818082144.075	20110818183612.532
PX3 (140)	12311	0	20110818082144.075	20110818183612.532
PX4 (145)	12311	0	20110818082144.075	20110818183612.532
IMG (150)	8694	0	20110818082143.860	20110818183612.532
VER (160)	562	564	20110818050010.925	20110818050226.706
VER (160)	7779	0	20110818082138.888	20110818183618.801
AUX (180)	11383	0	20110818082139.317	20110818183619.235

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
18/08/2011 00:07:18	-	Normal operation
18/08/2011 05:00:22	Normal operation	Auxiliary ASE synchronised
18/08/2011 05:02:30	Auxiliary ASE synchronised	External calibration
18/08/2011 05:27:50	External calibration	Auxiliary ASE synchronised
18/08/2011 05:29:58	Auxiliary ASE synchronised	Normal operation
18/08/2011 06:41:10	Normal operation	Auxiliary ASE synchronised
18/08/2011 06:43:18	Auxiliary ASE synchronised	External calibration
18/08/2011 07:13:26	External calibration	Auxiliary ASE synchronised
18/08/2011 07:15:18	Auxiliary ASE synchronised	Normal operation
18/08/2011 08:21:58	Normal operation	Standby refuse
18/08/2011 10:04:54	Standby refuse	Standby
18/08/2011 10:06:46	Standby	Heater 1 warm up
18/08/2011 11:41:42	Heater 1 warm up	Heater 2
18/08/2011 15:05:58	Heater 2	Auxiliary ASE synchronised
18/08/2011 18:46:46	Normal operation	Auxiliary ASE synchronised
18/08/2011 18:48:54	Auxiliary ASE synchronised	External calibration
18/08/2011 19:42:46	External calibration	Auxiliary ASE synchronised
18/08/2011 19:44:54	Auxiliary ASE synchronised	Normal operation
18/08/2011 20:31:02	Normal operation	Auxiliary ASE synchronised
18/08/2011 20:32:54	Auxiliary ASE synchronised	External calibration
18/08/2011 21:27:50	External calibration	Auxiliary ASE synchronised
18/08/2011 21:29:42	Auxiliary ASE synchronised	Normal operation
18/08/2011 22:14:14	Normal operation	Auxiliary ASE synchronised
18/08/2011 22:16:22	Auxiliary ASE synchronised	External calibration
18/08/2011 23:12:38	External calibration	Auxiliary ASE synchronised
18/08/2011 23:14:30	Auxiliary ASE synchronised	Normal operation
18/08/2011 23:57:10	Normal operation	Auxiliary ASE synchronised
18/08/2011 23:59:18	Auxiliary ASE synchronised	External calibration

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	277	e
L1 ENG PDUs	276	e
L1 ENG distinct GEPSGranule	277	a
GQisFlagQual set (PX1)	96.78 %	-
GQisFlagQual set (PX2)	95.40 %	-
GQisFlagQual set (PX3)	99.16 %	-
GQisFlagQual set (PX4)	95.36 %	-
GQisFlagQual set (all)	96.67 %	-

Table 4: Quality flags

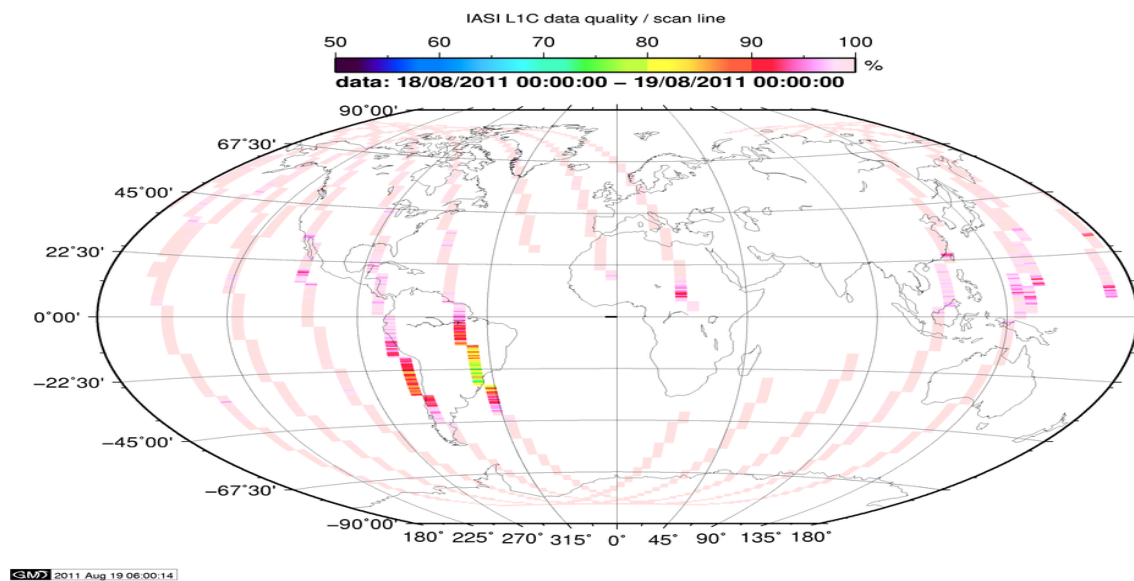


Figure 1: L1C data quality

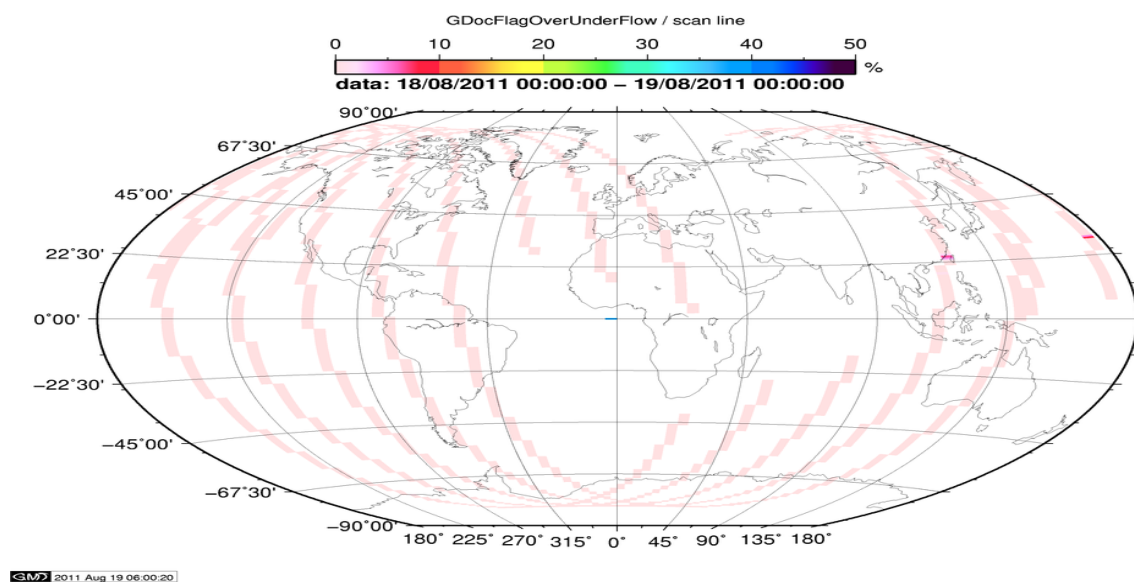


Figure 2: Flag of Over and Under Flows

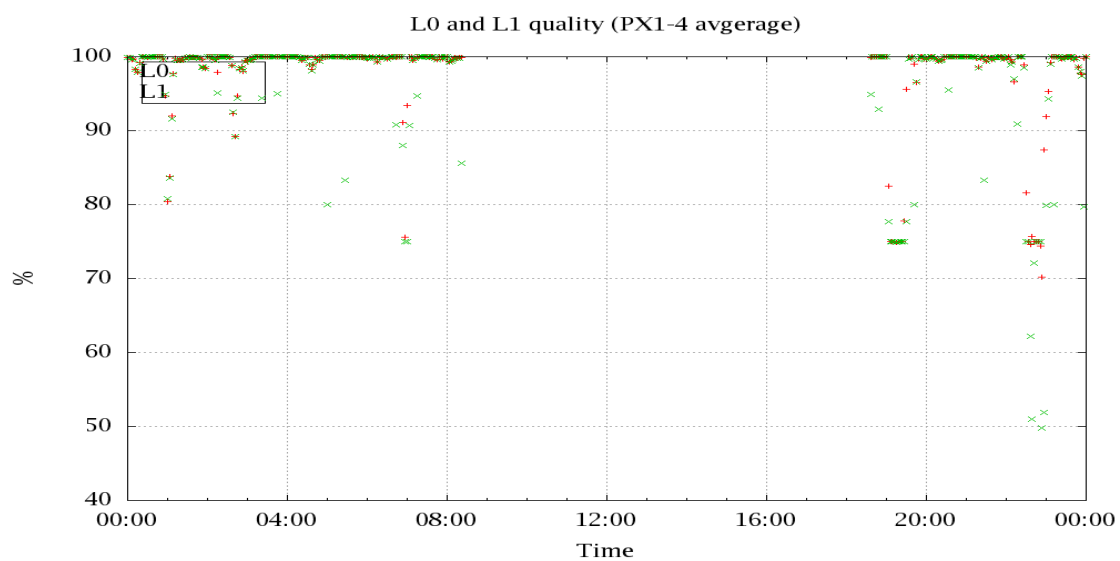


Figure 3: Level 0 and 1C overall quality

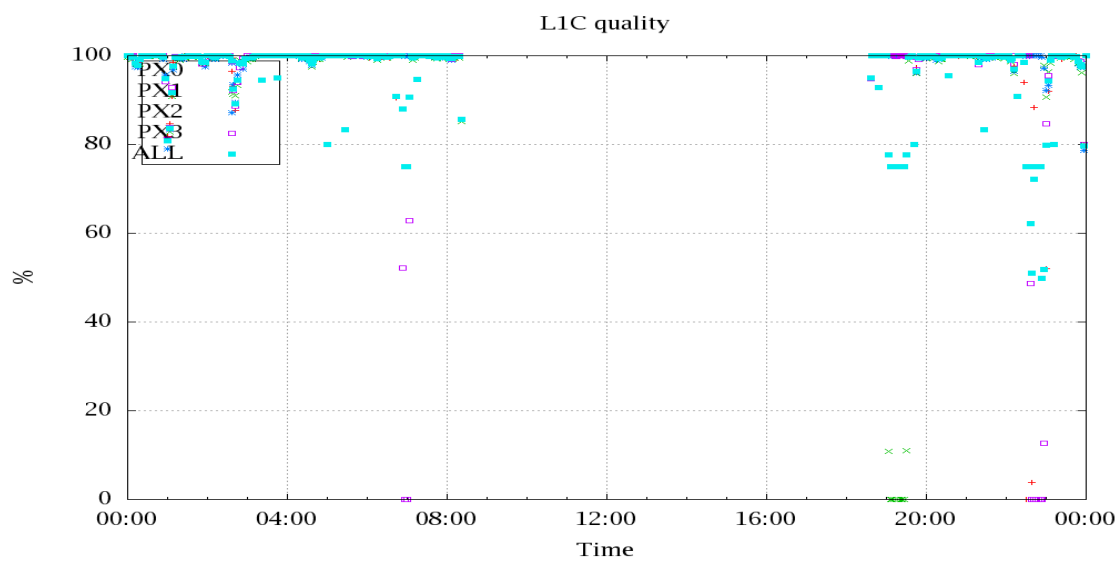


Figure 4: Level 1C quality

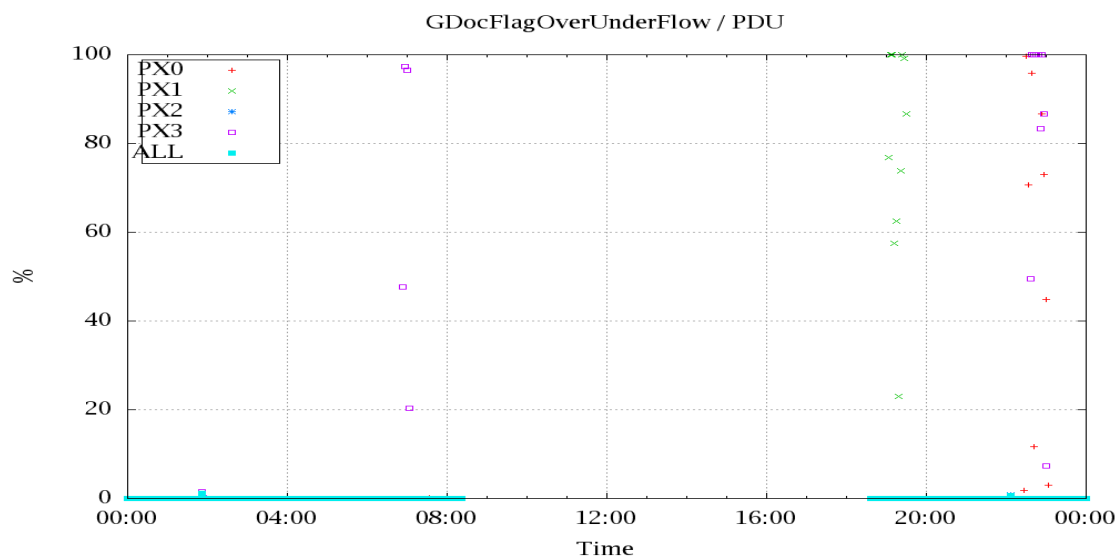


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

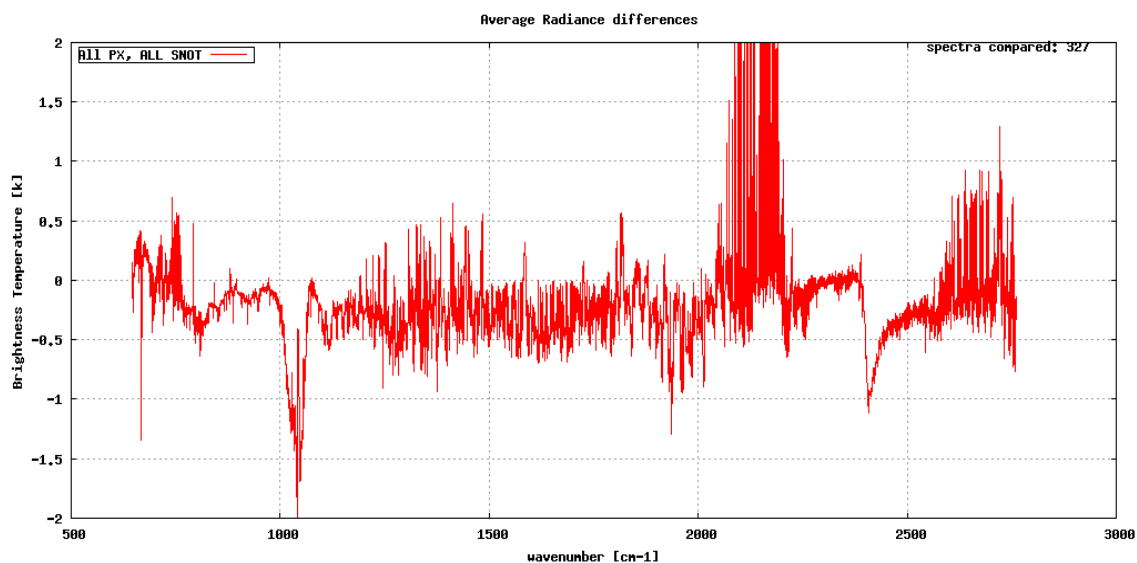


Figure 6: Average Radiance differences: OBS-CAL

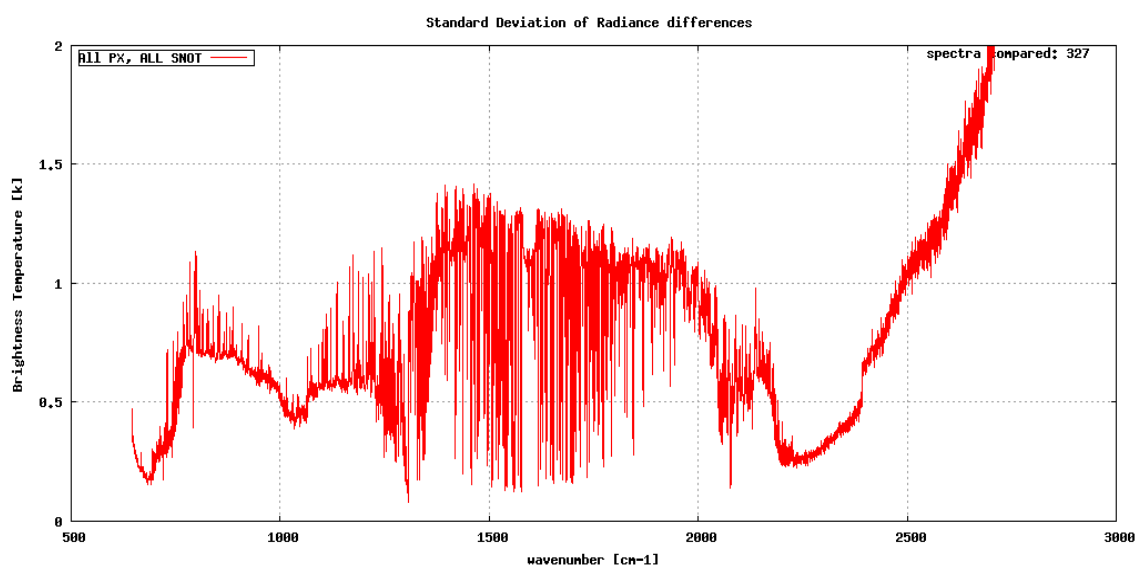


Figure 7: Standard Deviation of Radiance differences

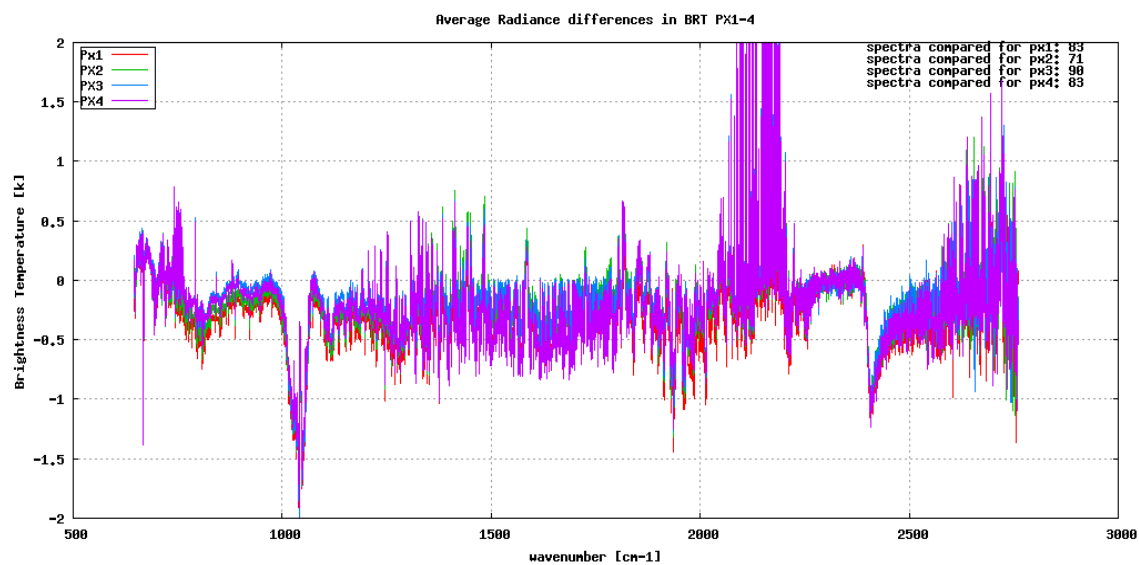


Figure 8: Average Radiance differences: OBS-CAL

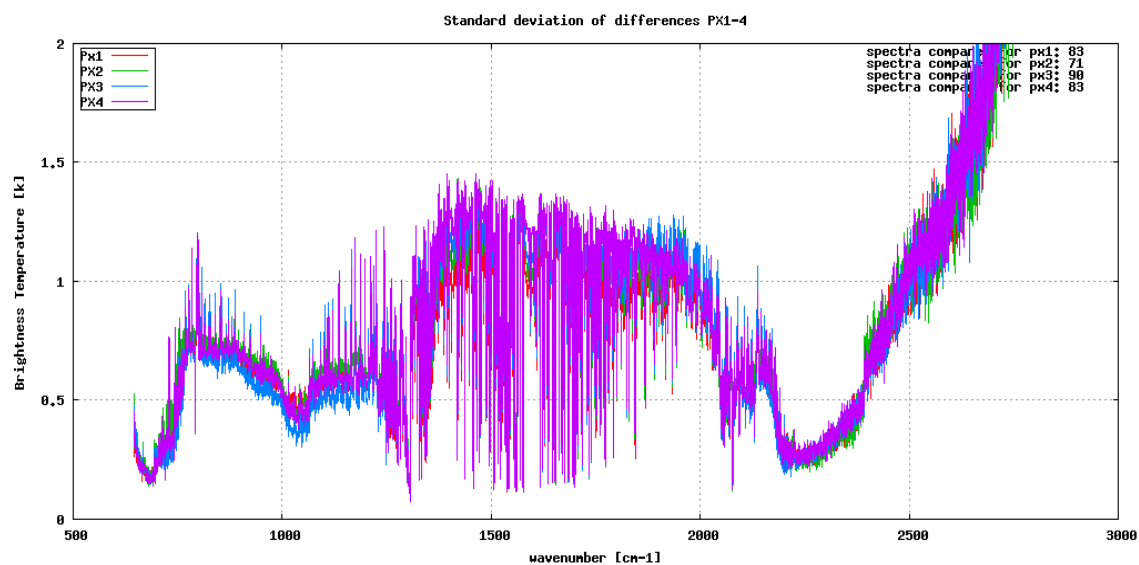


Figure 9: Standard Deviation of Radiance differences

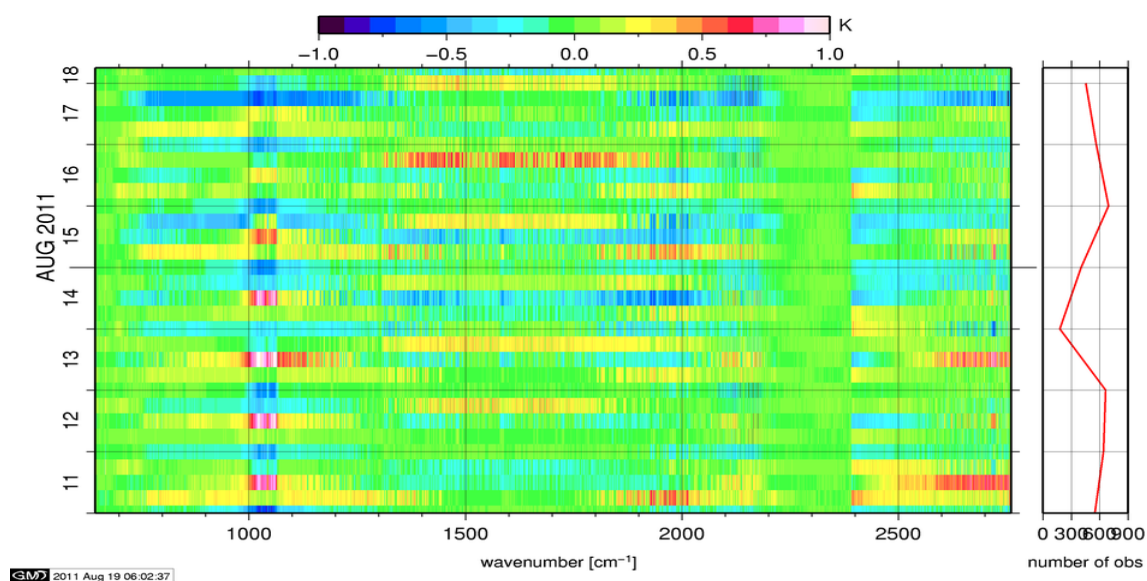


Figure 10: Radiance Anomaly in BRT: All Channels

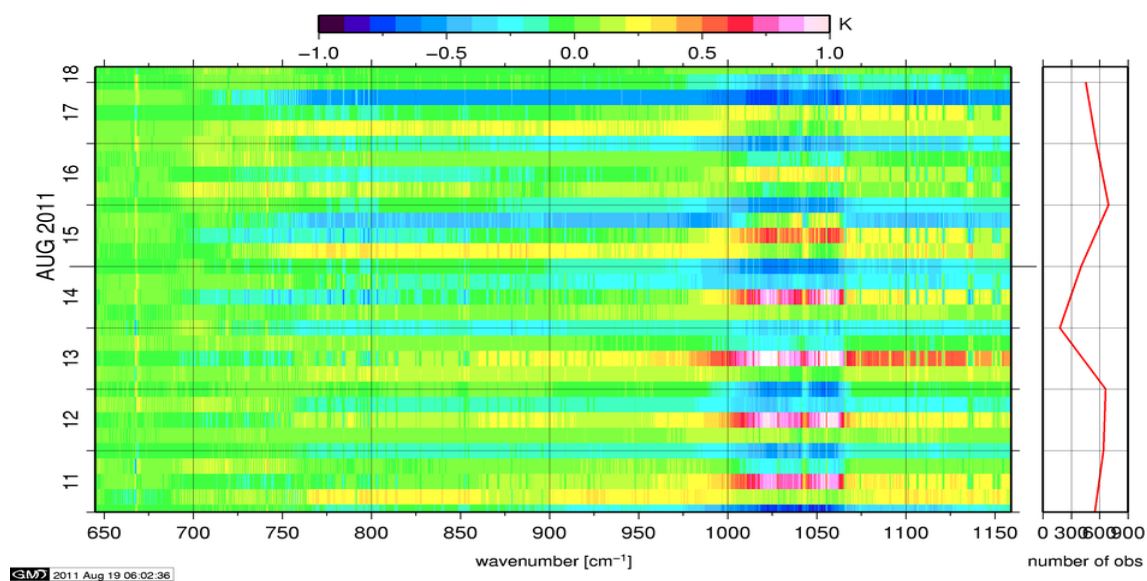


Figure 11: Radiance Anomaly in BRT: IASI Band 1

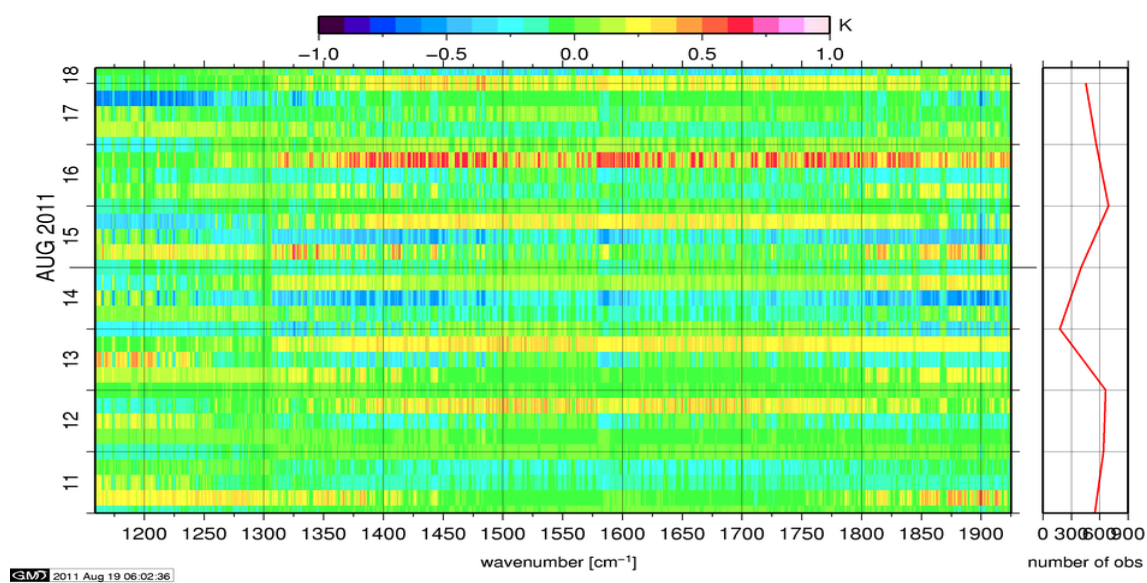


Figure 12: Radiance Anomaly in BRT: IASI Band 2

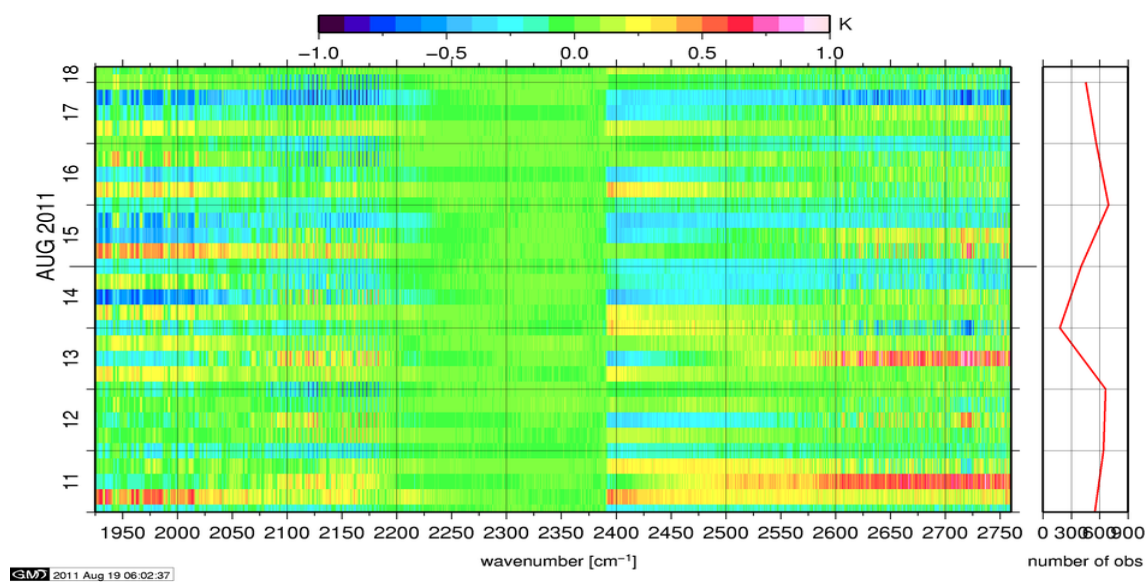


Figure 13: Radiance Anomaly in BRT: IASI Band 3

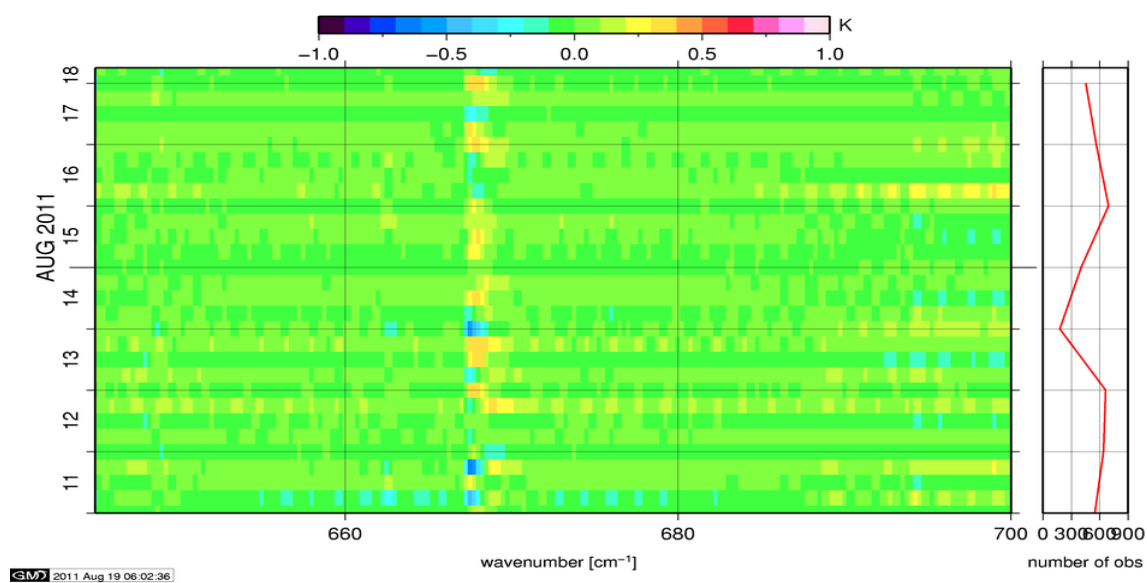


Figure 14: Radiance Anomaly in BRT: CO2 14

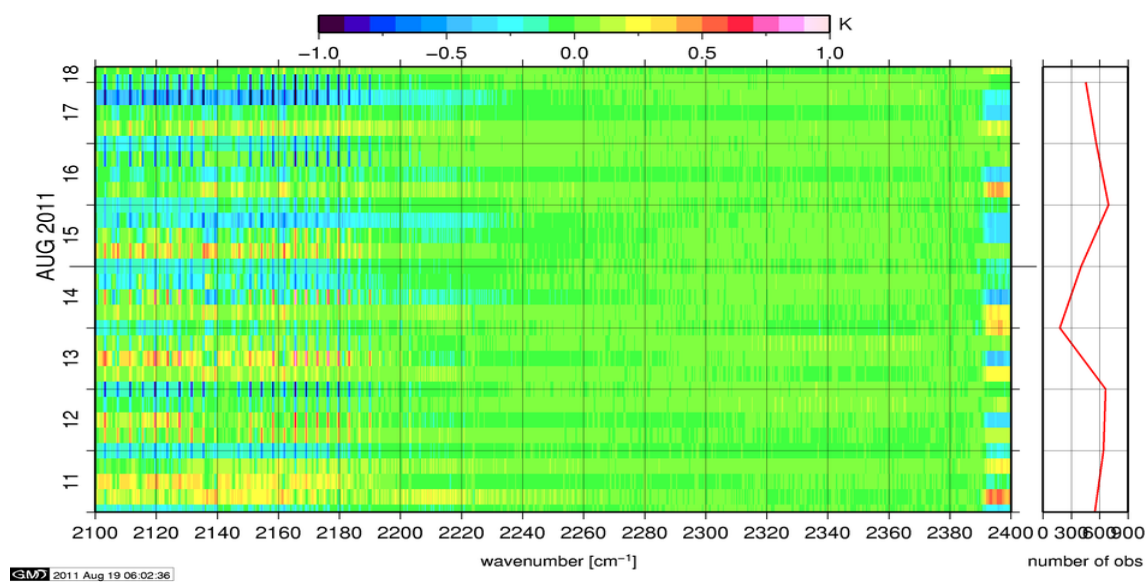


Figure 15: Radiance Anomaly in BRT: CO2 4.3

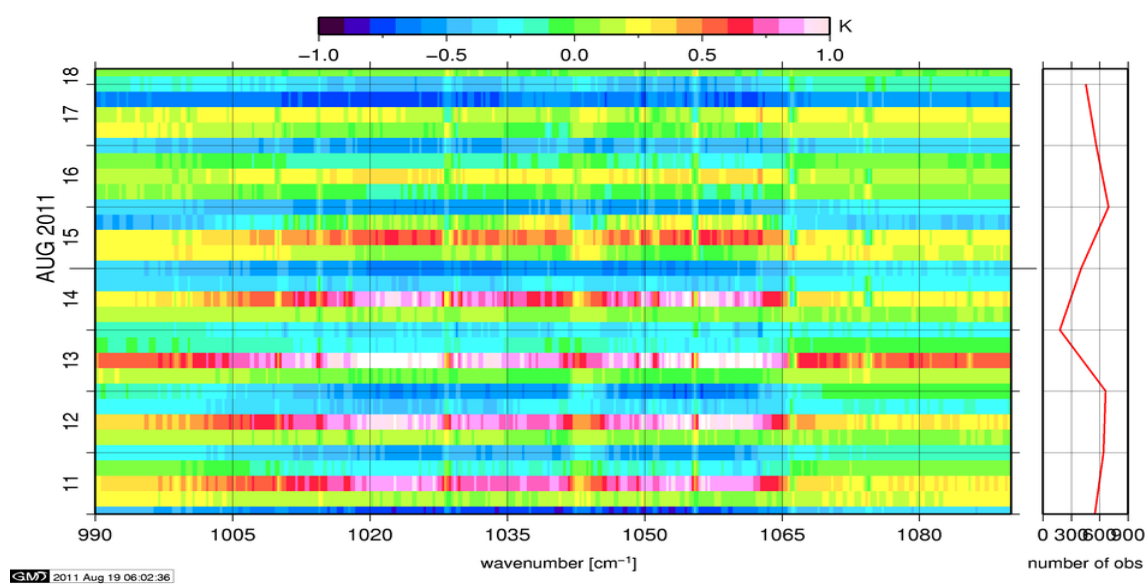


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

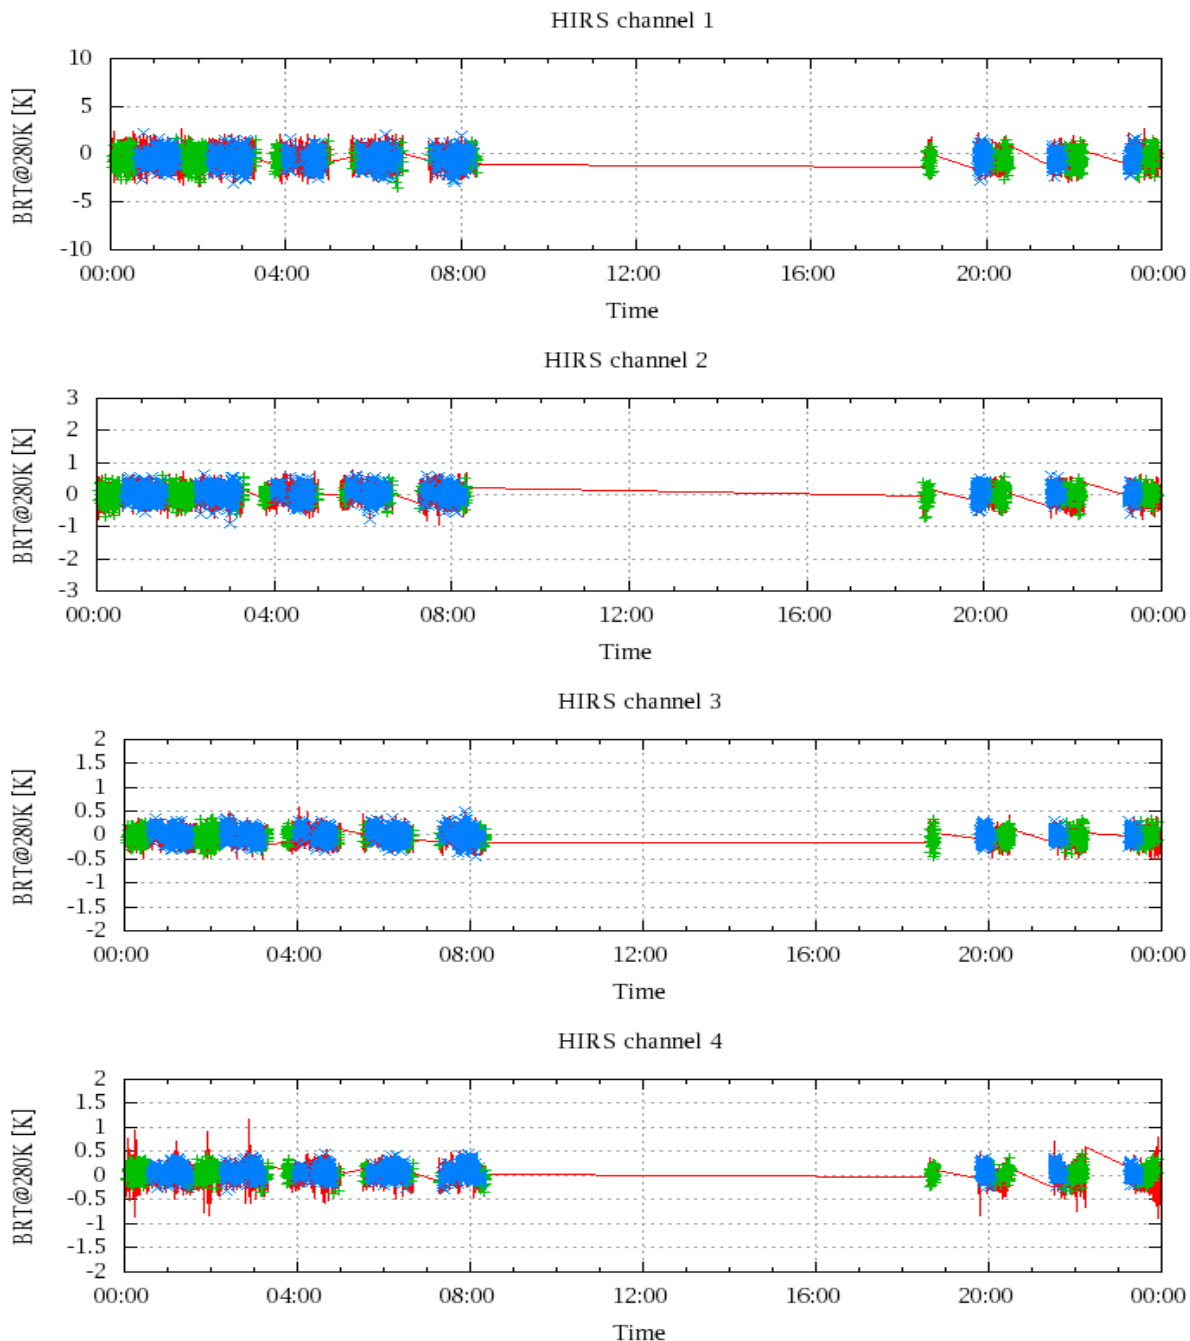


Figure 17: Radiance Differences in BRT

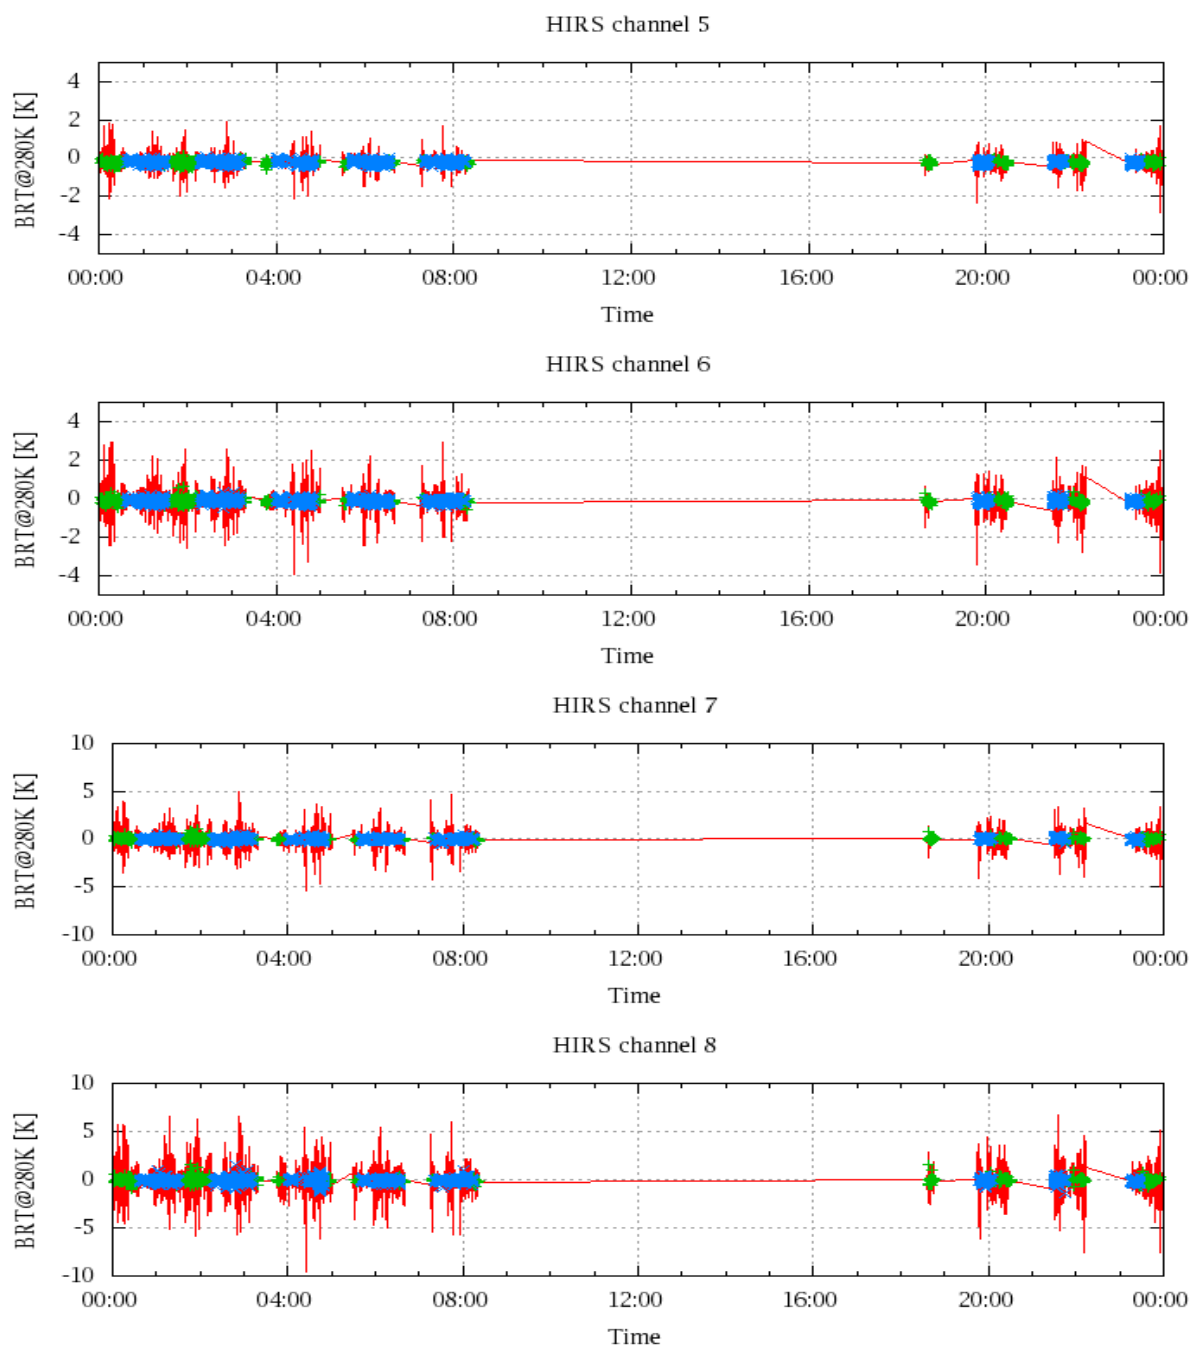


Figure 18: Radiance Differences in BRT

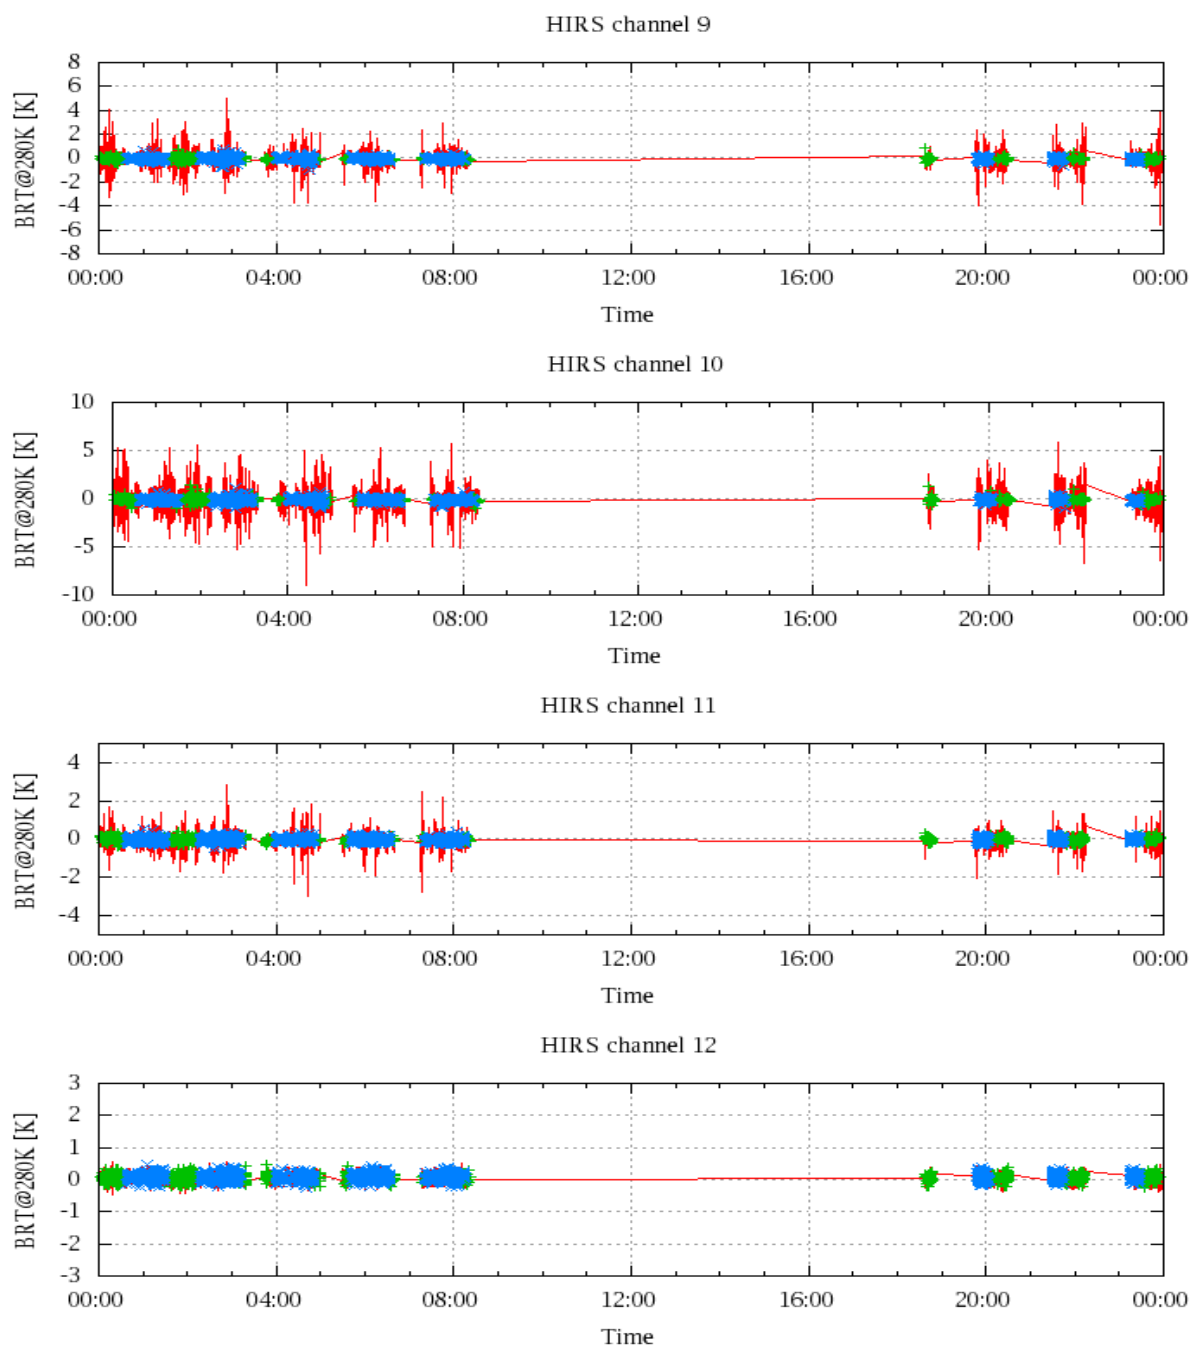


Figure 19: Radiance Differences in BRT

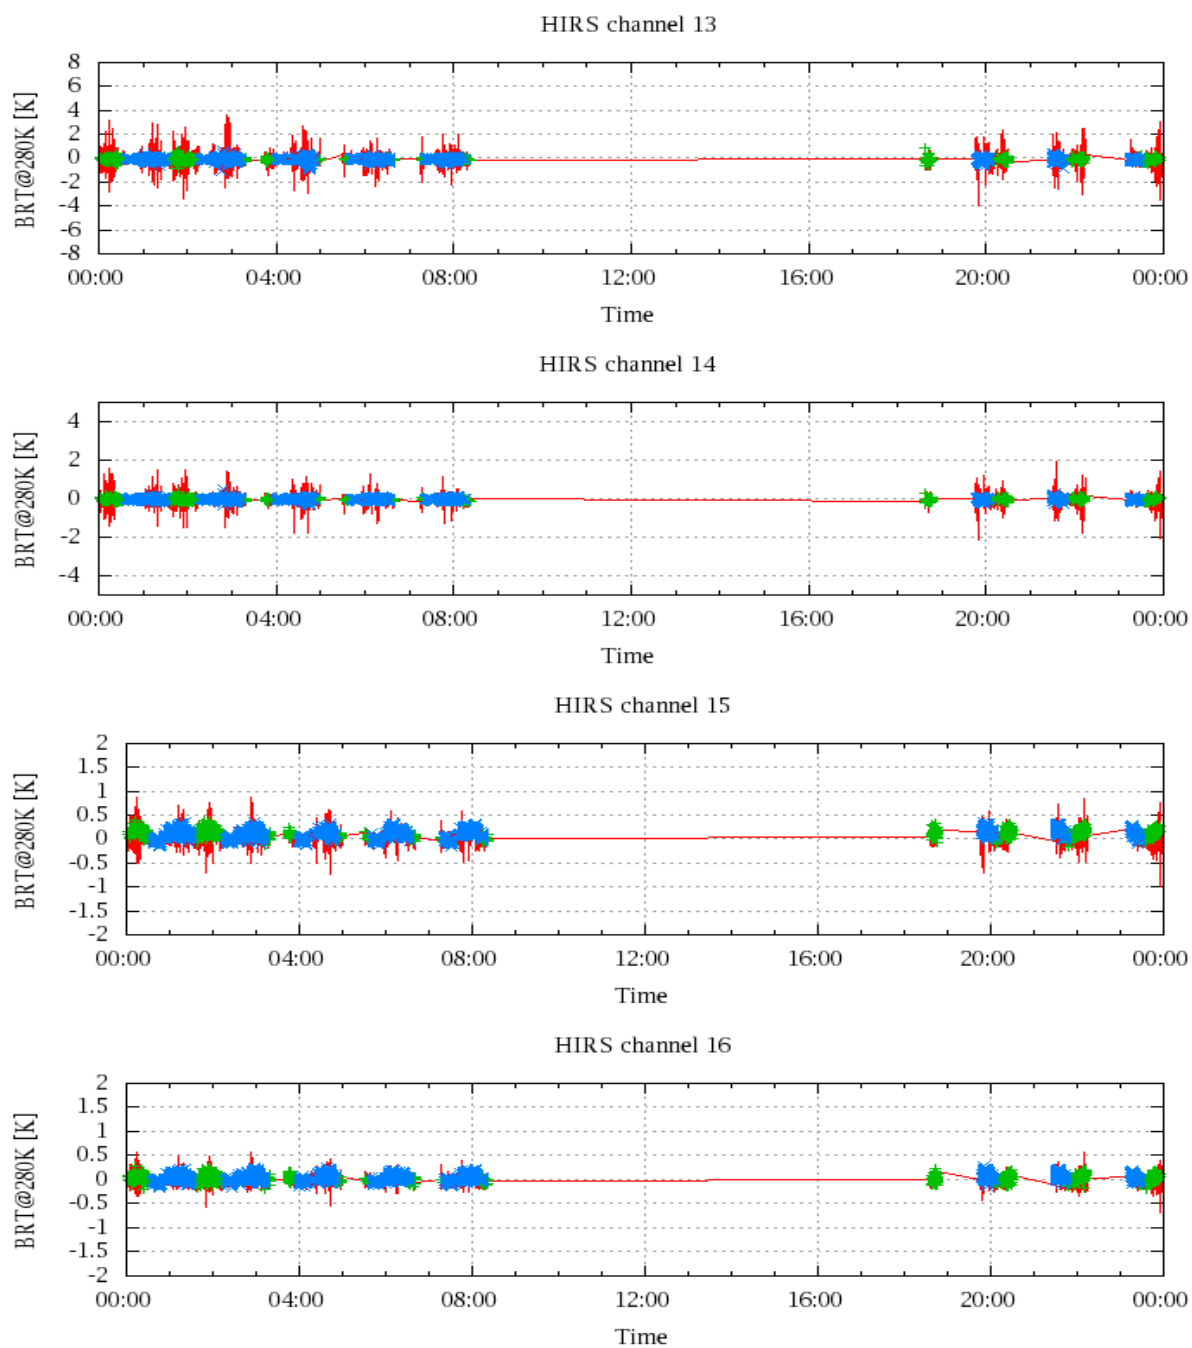


Figure 20: Radiance Differences in BRT

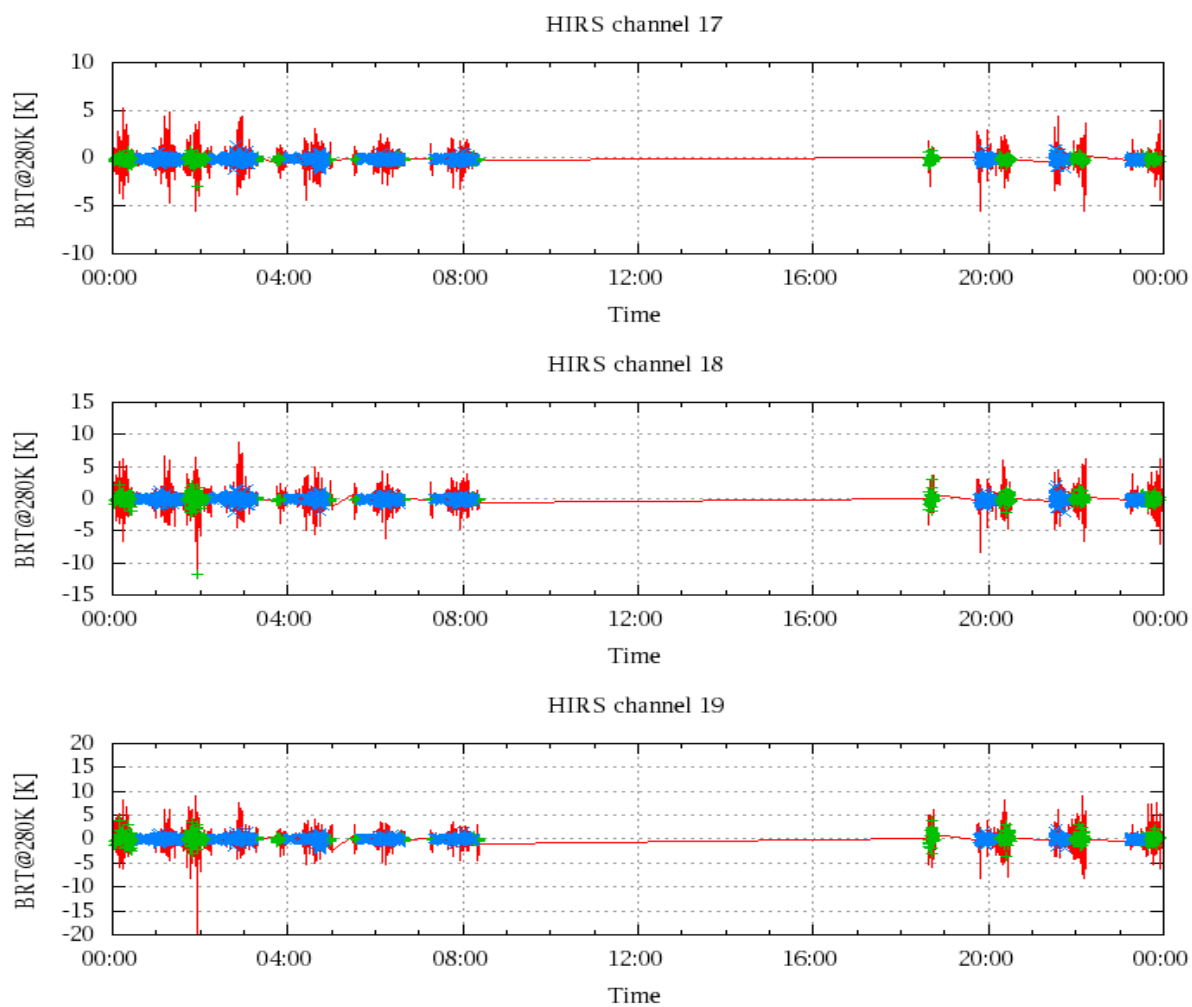


Figure 21: Radinace Differences in BRT