

IASI L0 and L1 Daily Monitoring Report

IASI monitoring team

16/07/2014 00:00:00 - 17/07/2014 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-A satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 16/07/2014 00:00:00 - 17/07/2014 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

2 Data quantity 16/07/2014 00:00:00 - 17/07/2014 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	480	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	3970	3983	20140716114805.935	20140716114808.747
PX1 (130)	3990	4047	20140716114810.259	20140716114825.610
PX1 (130)	4093	4095	20140716114838.583	20140716114839.017
PX2 (135)	3969	3982	20140716114804.204	20140716114808.528
PX2 (135)	3988	3990	20140716114809.825	20140716114810.259
PX2 (135)	3990	4037	20140716114810.259	20140716114823.446
PX2 (135)	4037	4044	20140716114823.446	20140716114824.962
PX2 (135)	4044	4046	20140716114824.962	20140716114825.392
PX3 (140)	3969	3982	20140716114804.204	20140716114808.528
PX3 (140)	3986	3988	20140716114809.392	20140716114809.825
PX3 (140)	3990	4037	20140716114810.259	20140716114823.446
PX3 (140)	4037	4040	20140716114823.446	20140716114824.095
PX3 (140)	4040	4044	20140716114824.095	20140716114824.962
PX4 (145)	3969	3982	20140716114804.204	20140716114808.528
PX4 (145)	3990	4037	20140716114810.259	20140716114823.446
PX4 (145)	4037	4040	20140716114823.446	20140716114824.095
PX4 (145)	4040	4043	20140716114824.095	20140716114824.747
IMG (150)	6866	6879	20140716114805.501	20140716114808.528

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
IMG (150)	6884	6886	20140716114809.610	20140716114810.044
IMG (150)	6887	6951	20140716114810.259	20140716114825.392
VER (160)	7739	7750	20140716114804.204	20140716114828.204
AUX (180)	4819	4822	20140716114804.638	20140716114828.638

Table 2: L0 data gaps

3 Instrument modes

Time	Transition from	Transition to
16/07/2014 00:00:03	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.47 %	-
GQisFlagQual set (PX2)	99.41 %	-
GQisFlagQual set (PX3)	99.47 %	-
GQisFlagQual set (PX4)	99.49 %	-
GQisFlagQual set (all)	99.46 %	-

Table 4: Quality flags

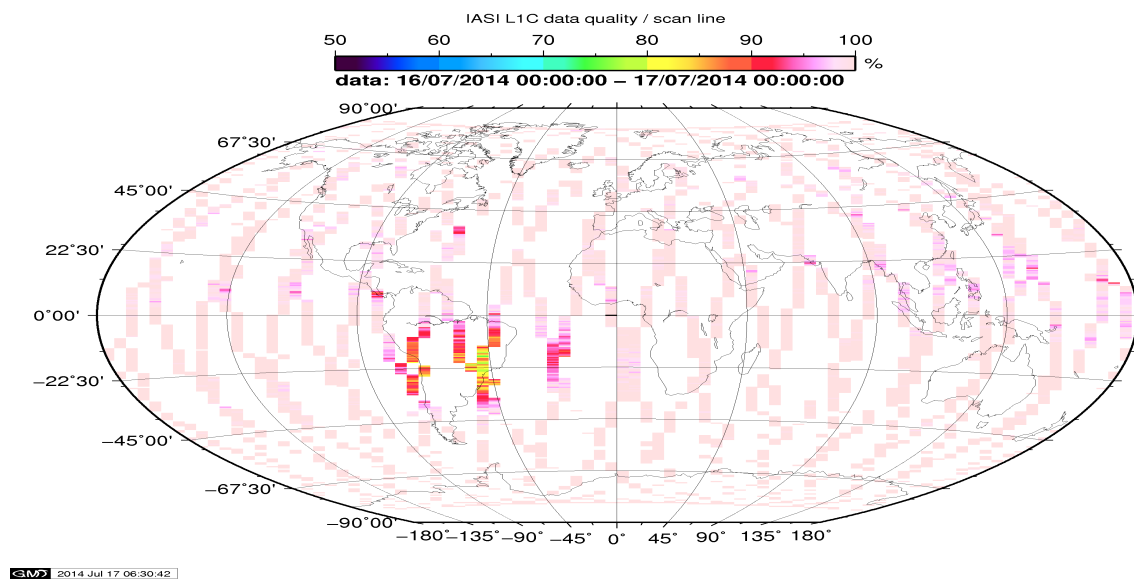


Figure 1: L1C data quality

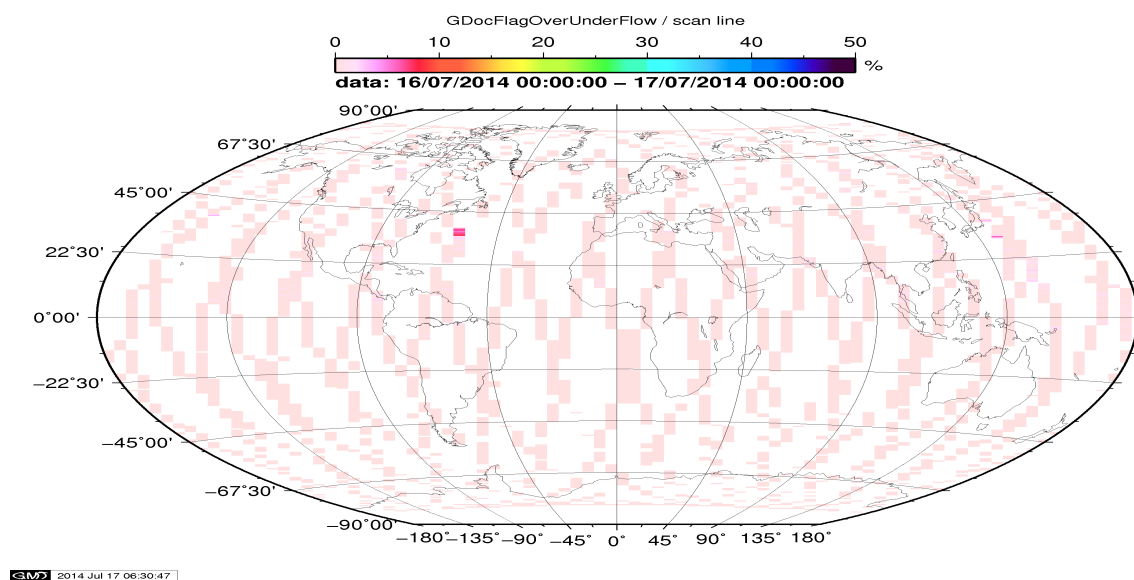


Figure 2: Flag of Over and Under Flows

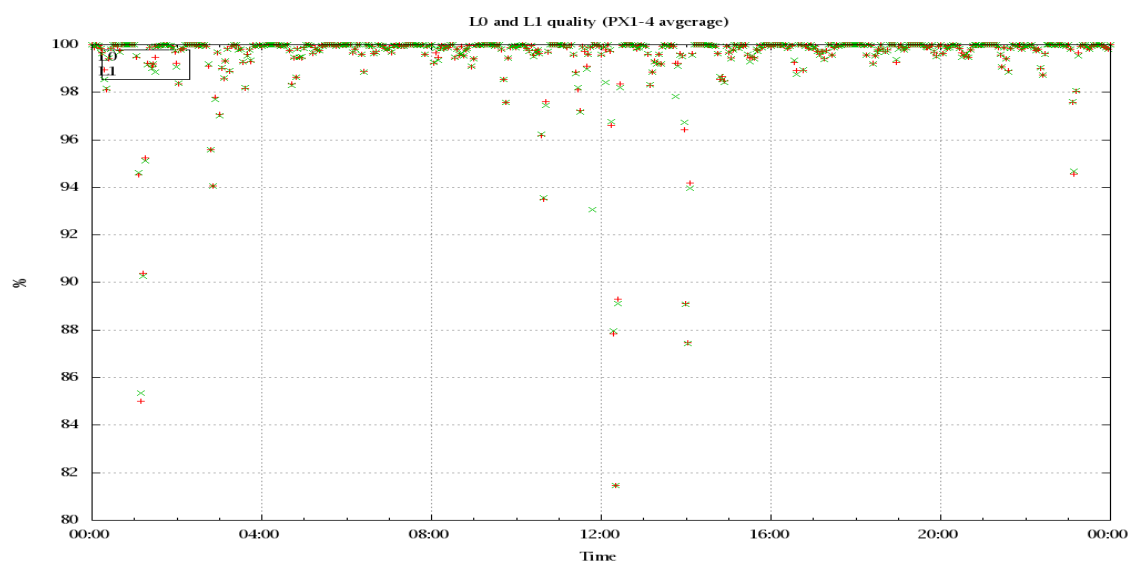


Figure 3: Level 0 and 1C overall quality

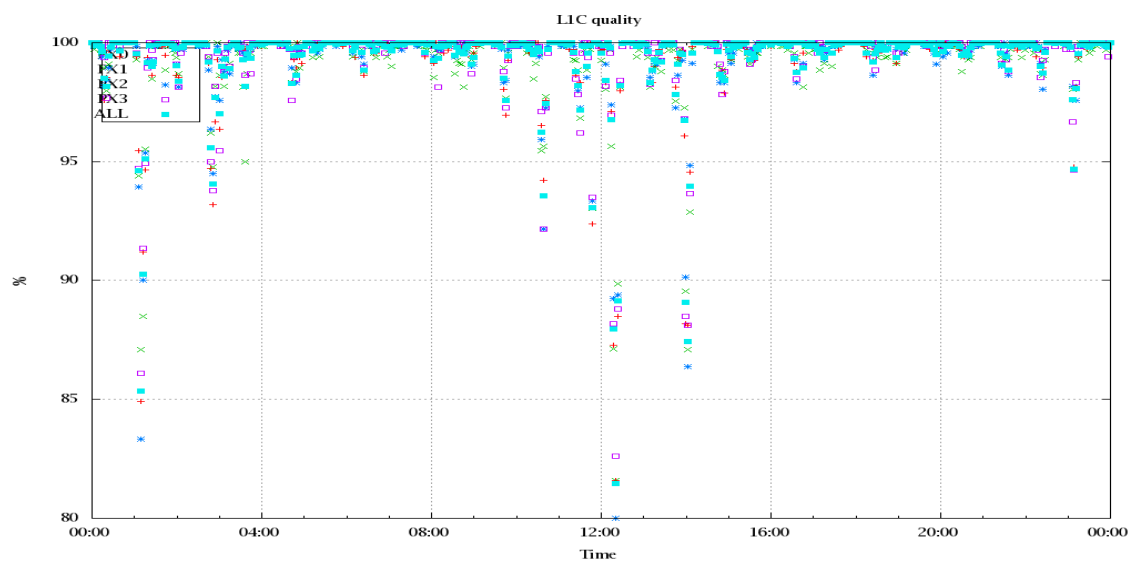


Figure 4: Level 1C quality

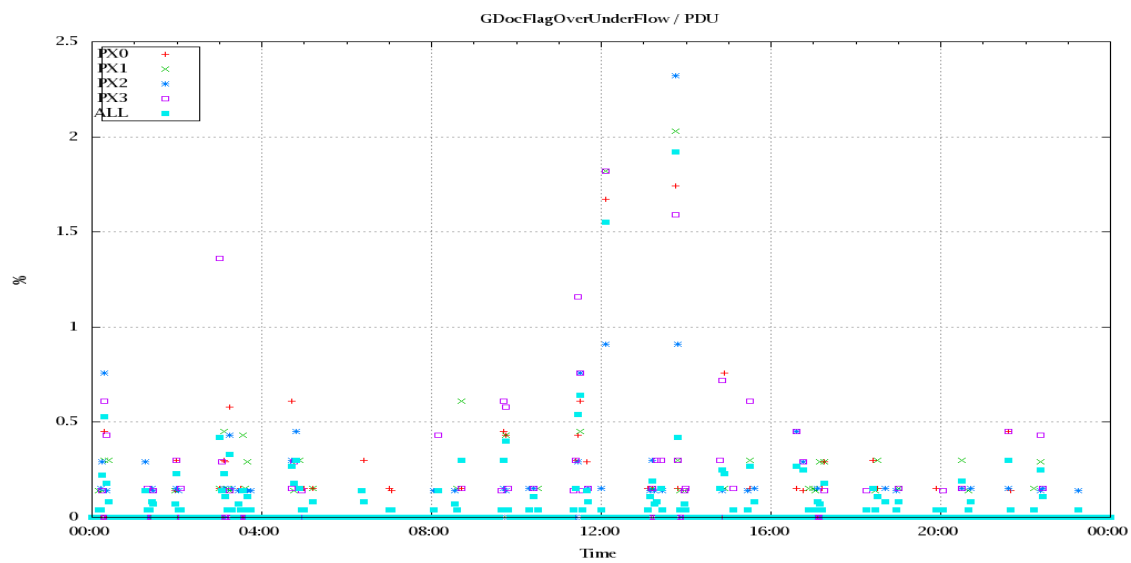


Figure 5: OverUnderFlowFlag timeseries

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

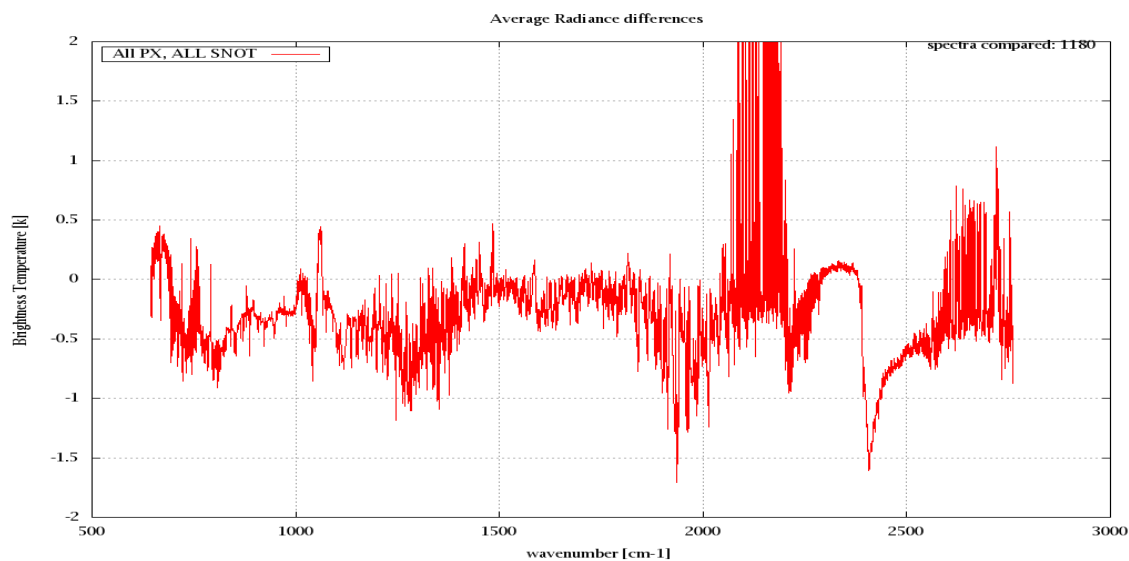


Figure 6: Average Radiance differences: OBS-CAL

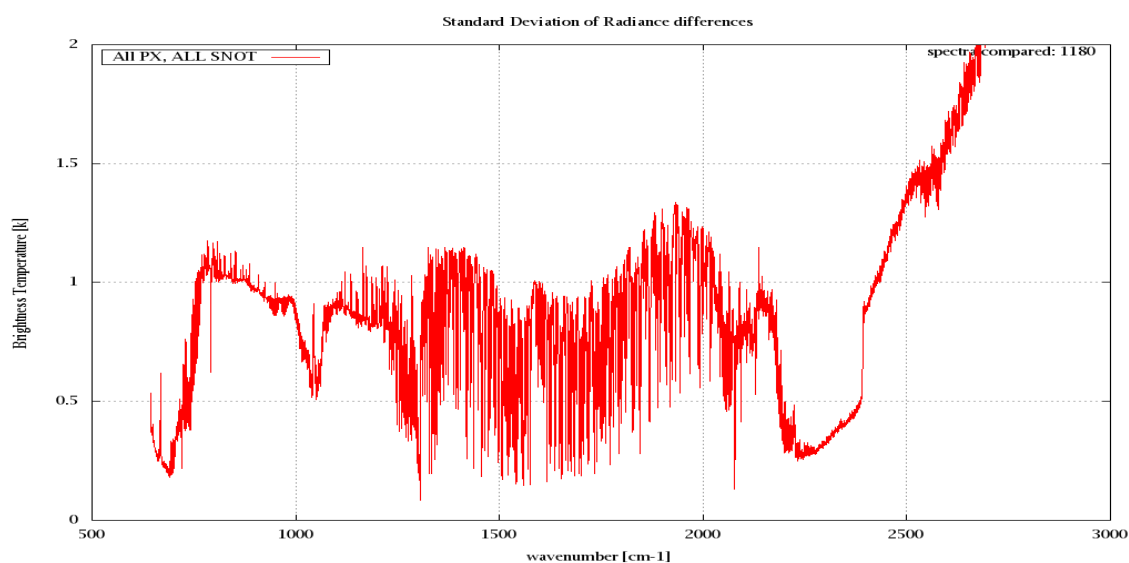


Figure 7: Standard Deviation of Radiance differences

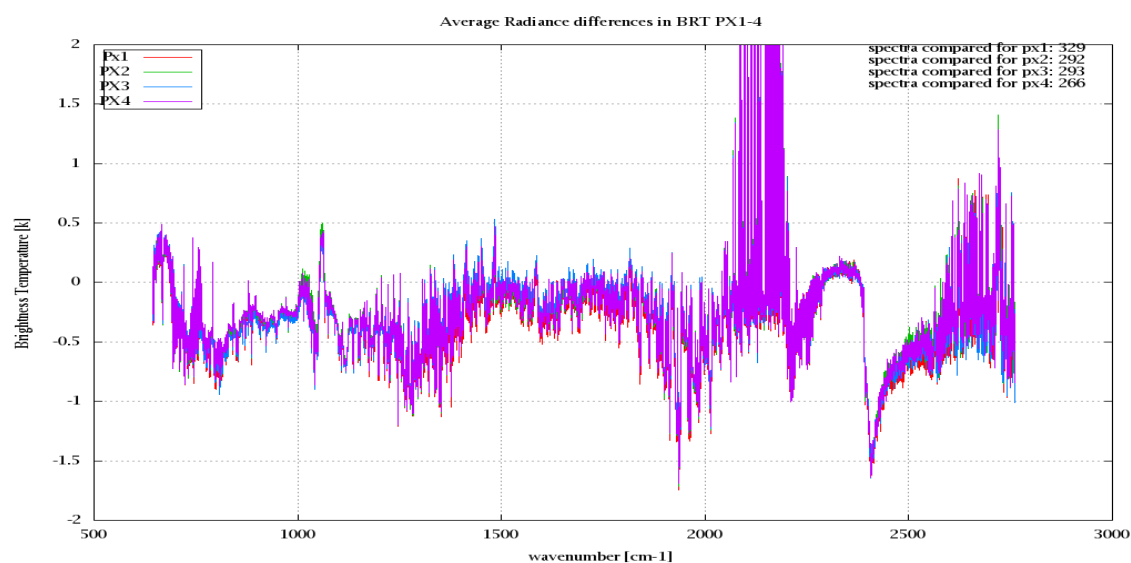


Figure 8: Average Radiance differences: OBS-CAL

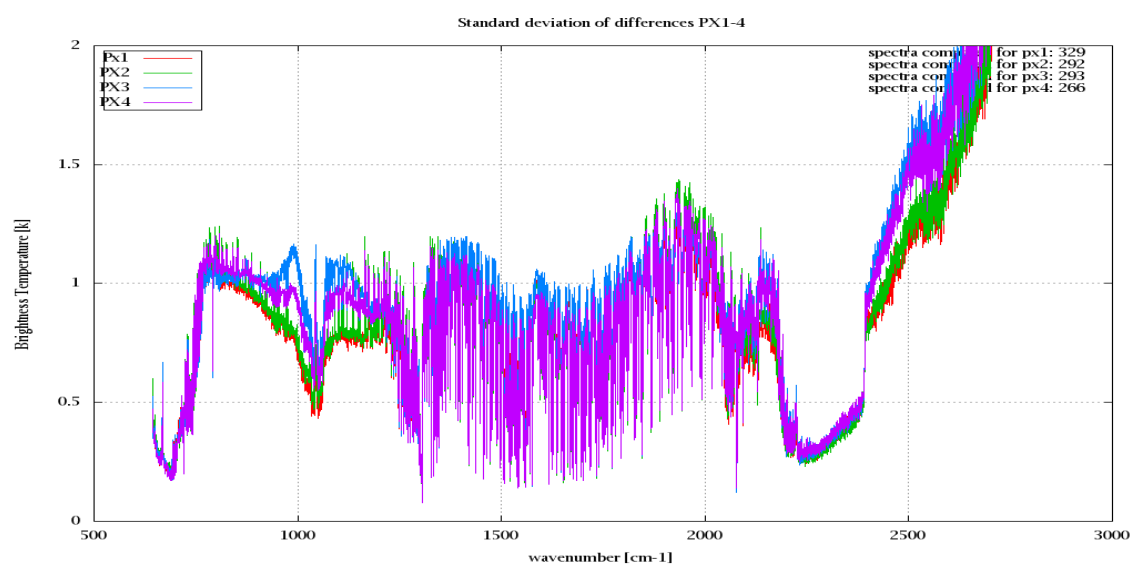


Figure 9: Standard Deviation of Radiance differences

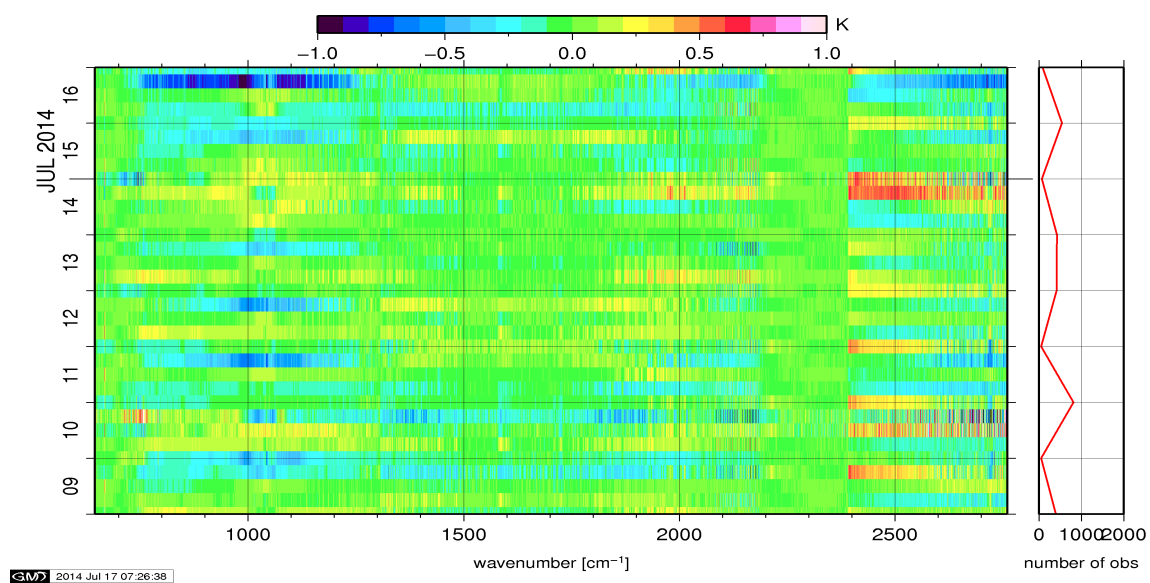


Figure 10: Radiance Anomaly in BRT: All Channels

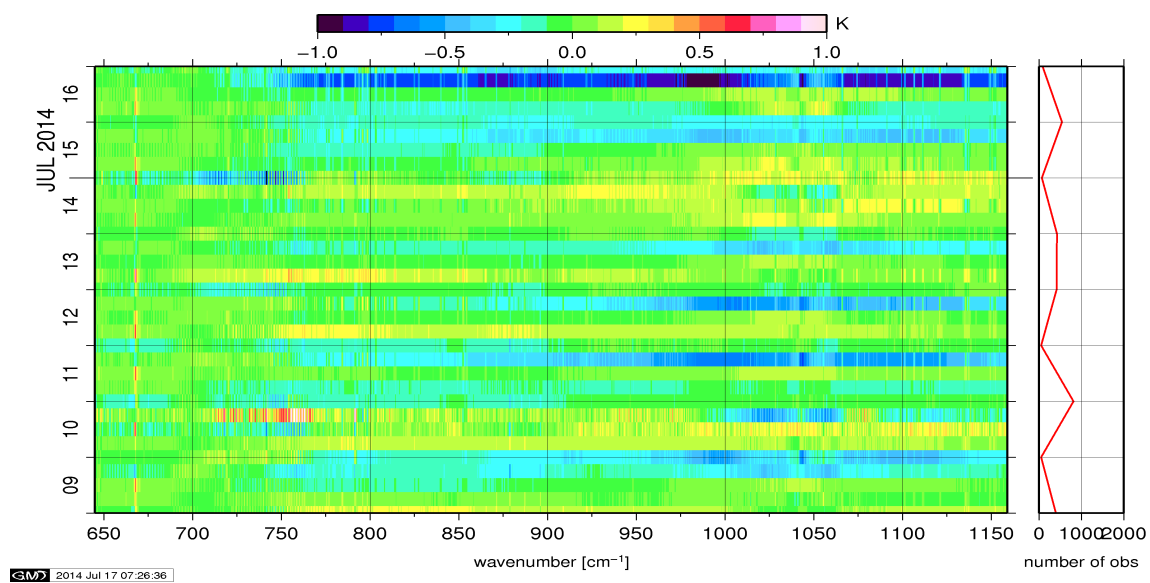


Figure 11: Radiance Anomaly in BRT: IASI Band 1

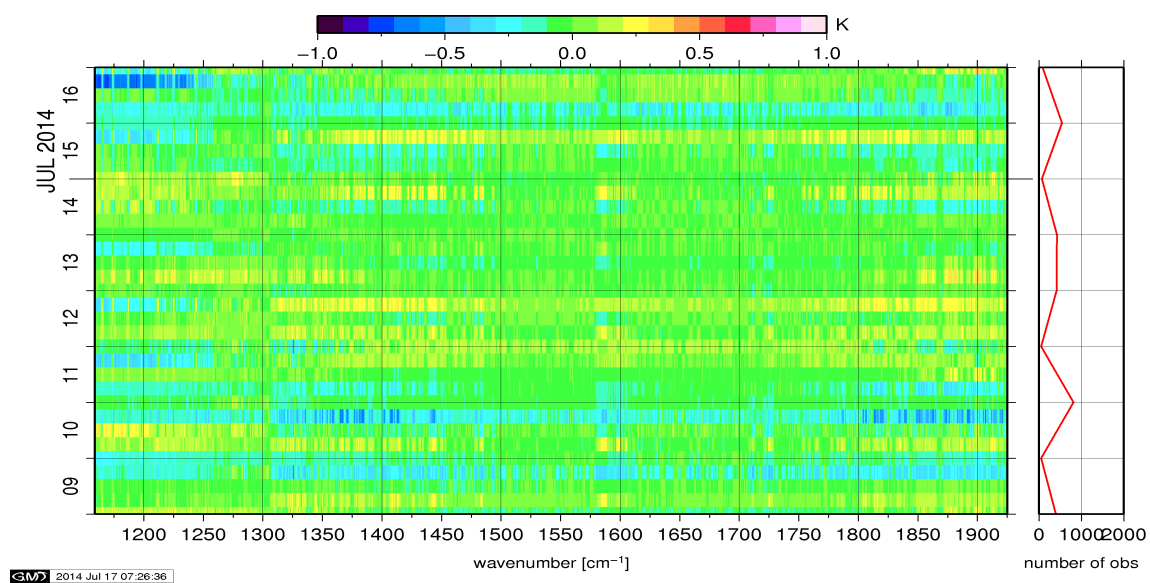


Figure 12: Radiance Anomaly in BRT: IASI Band 2

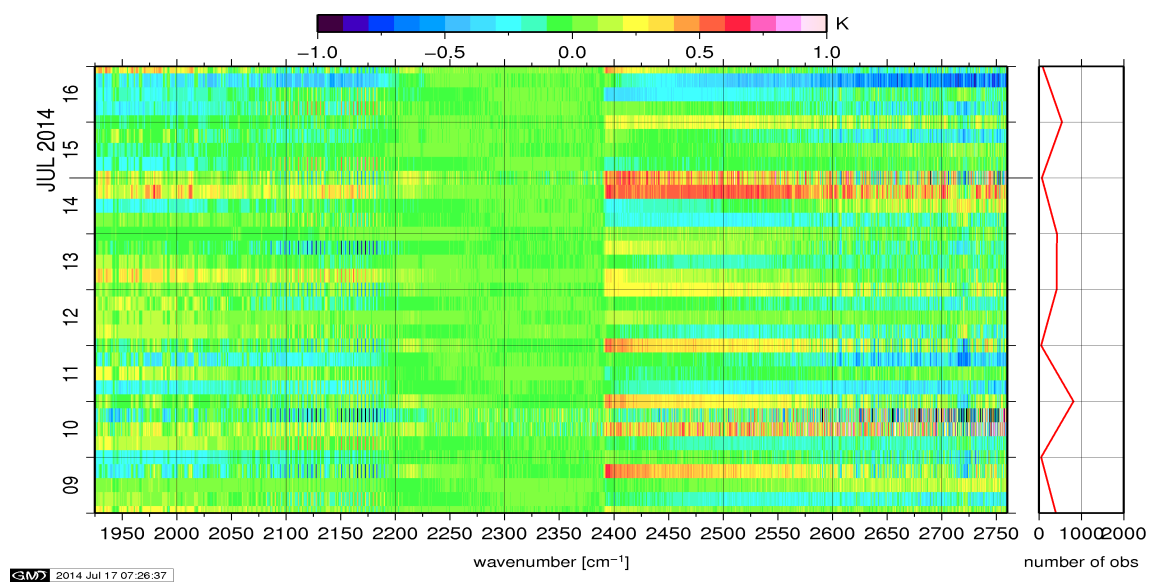


Figure 13: Radiance Anomaly in BRT: IASI Band 3

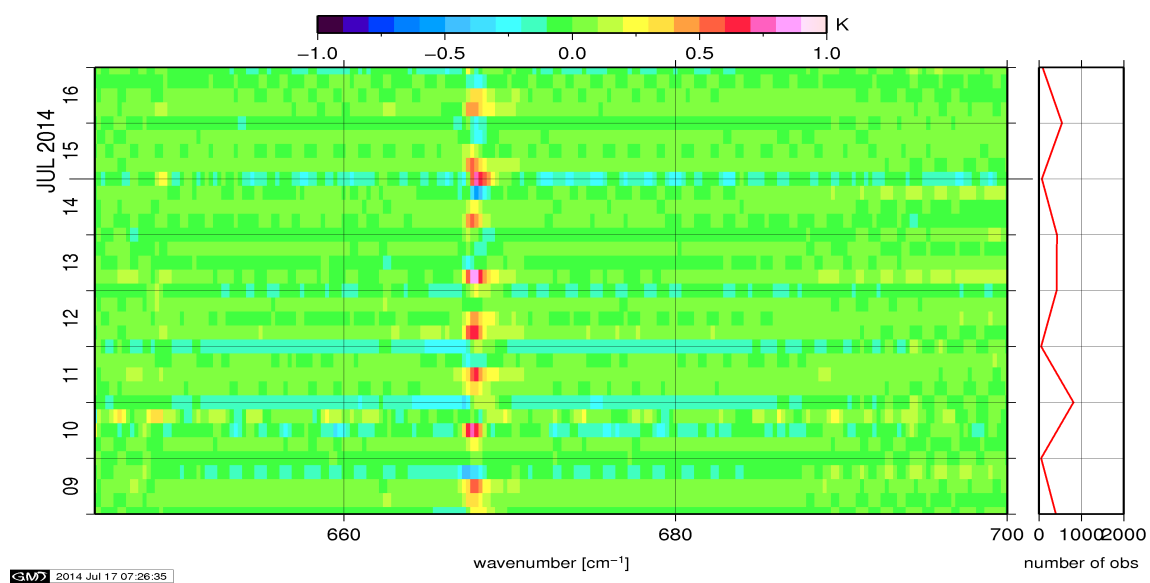


Figure 14: Radiance Anomaly in BRT: CO2 14

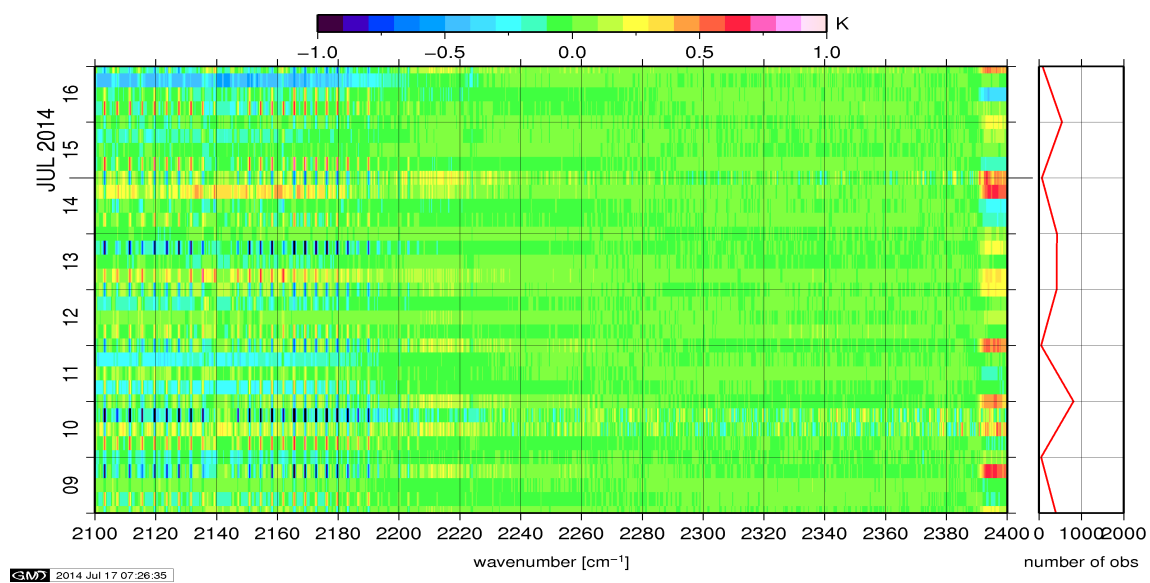


Figure 15: Radiance Anomaly in BRT: CO2 4.3

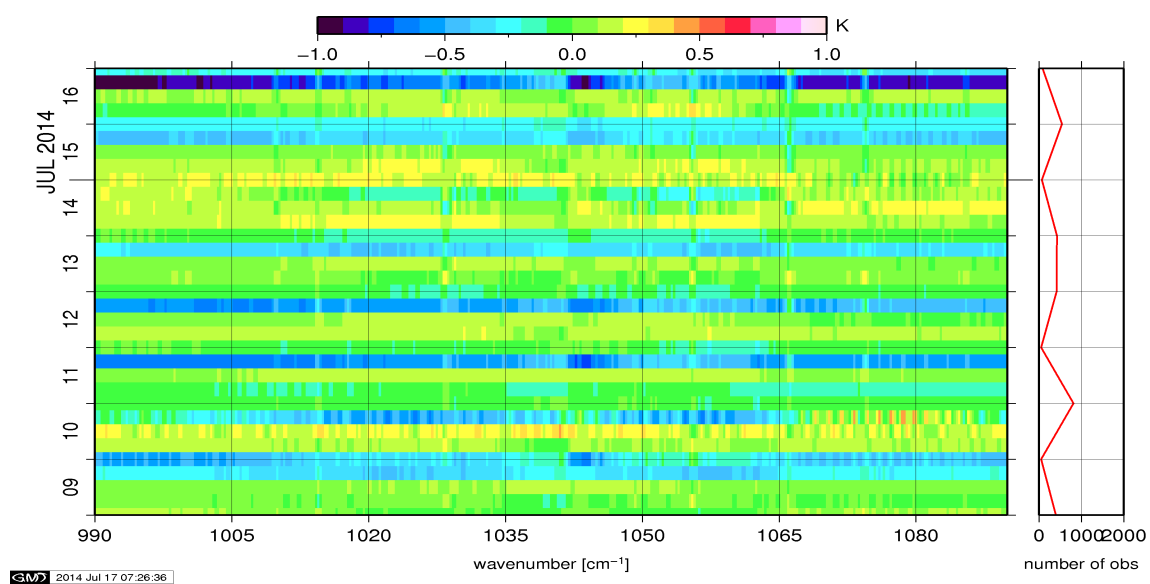


Figure 16: Radiance Anomaly in BRT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

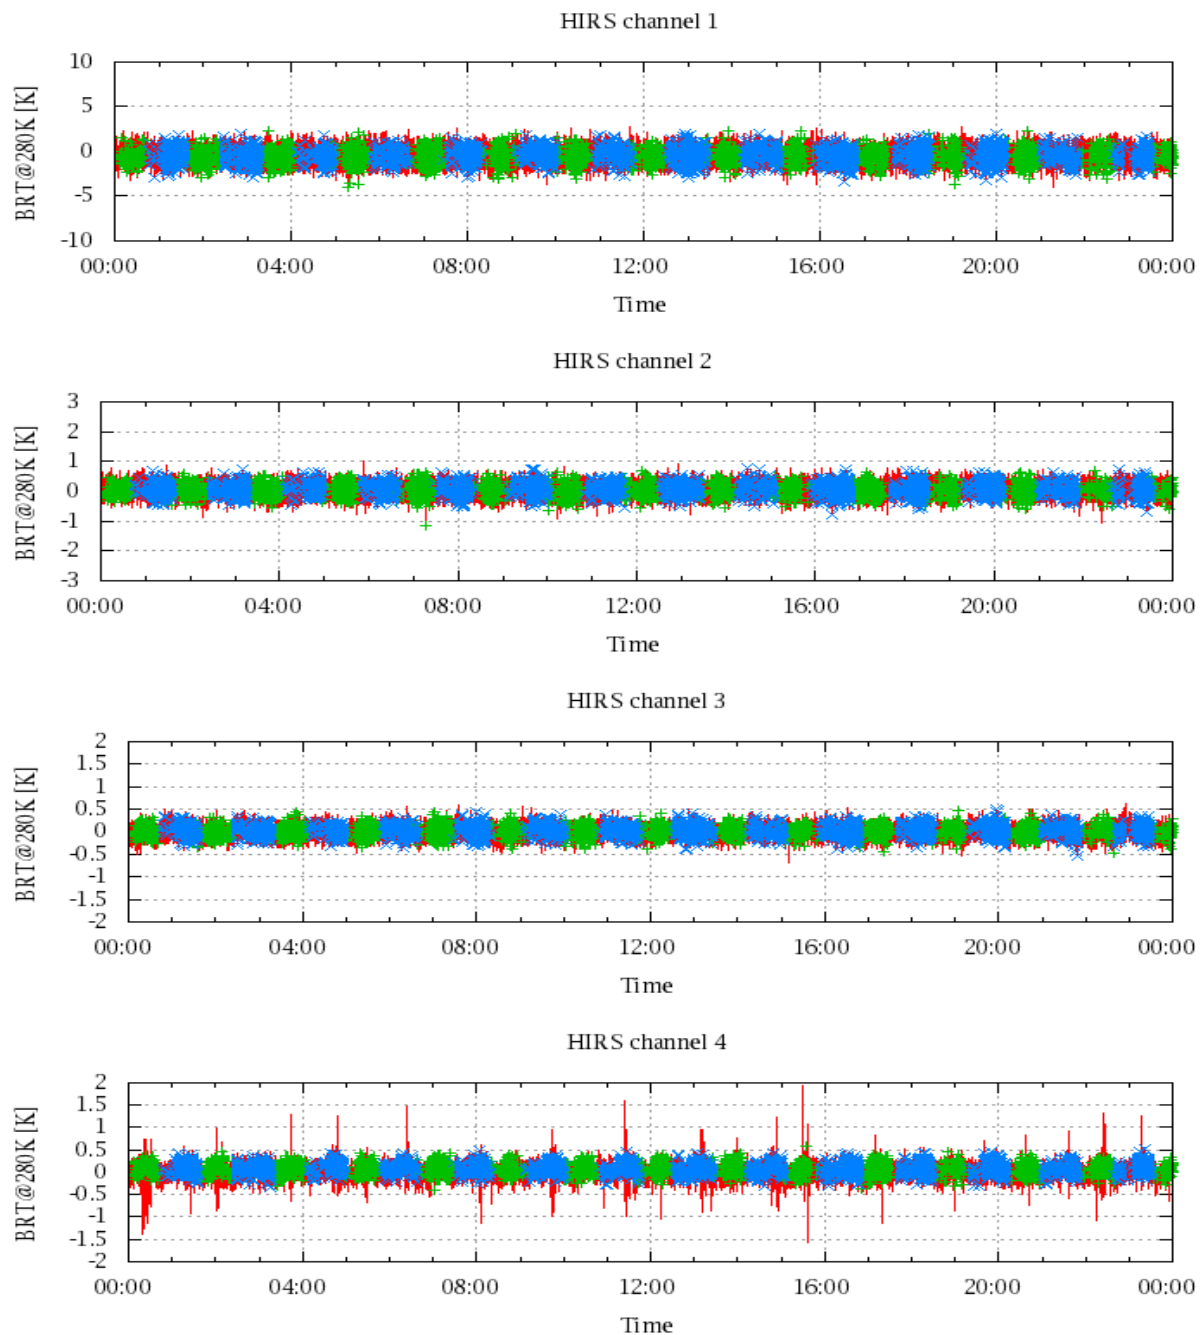


Figure 17: Radiance Differences in BRT

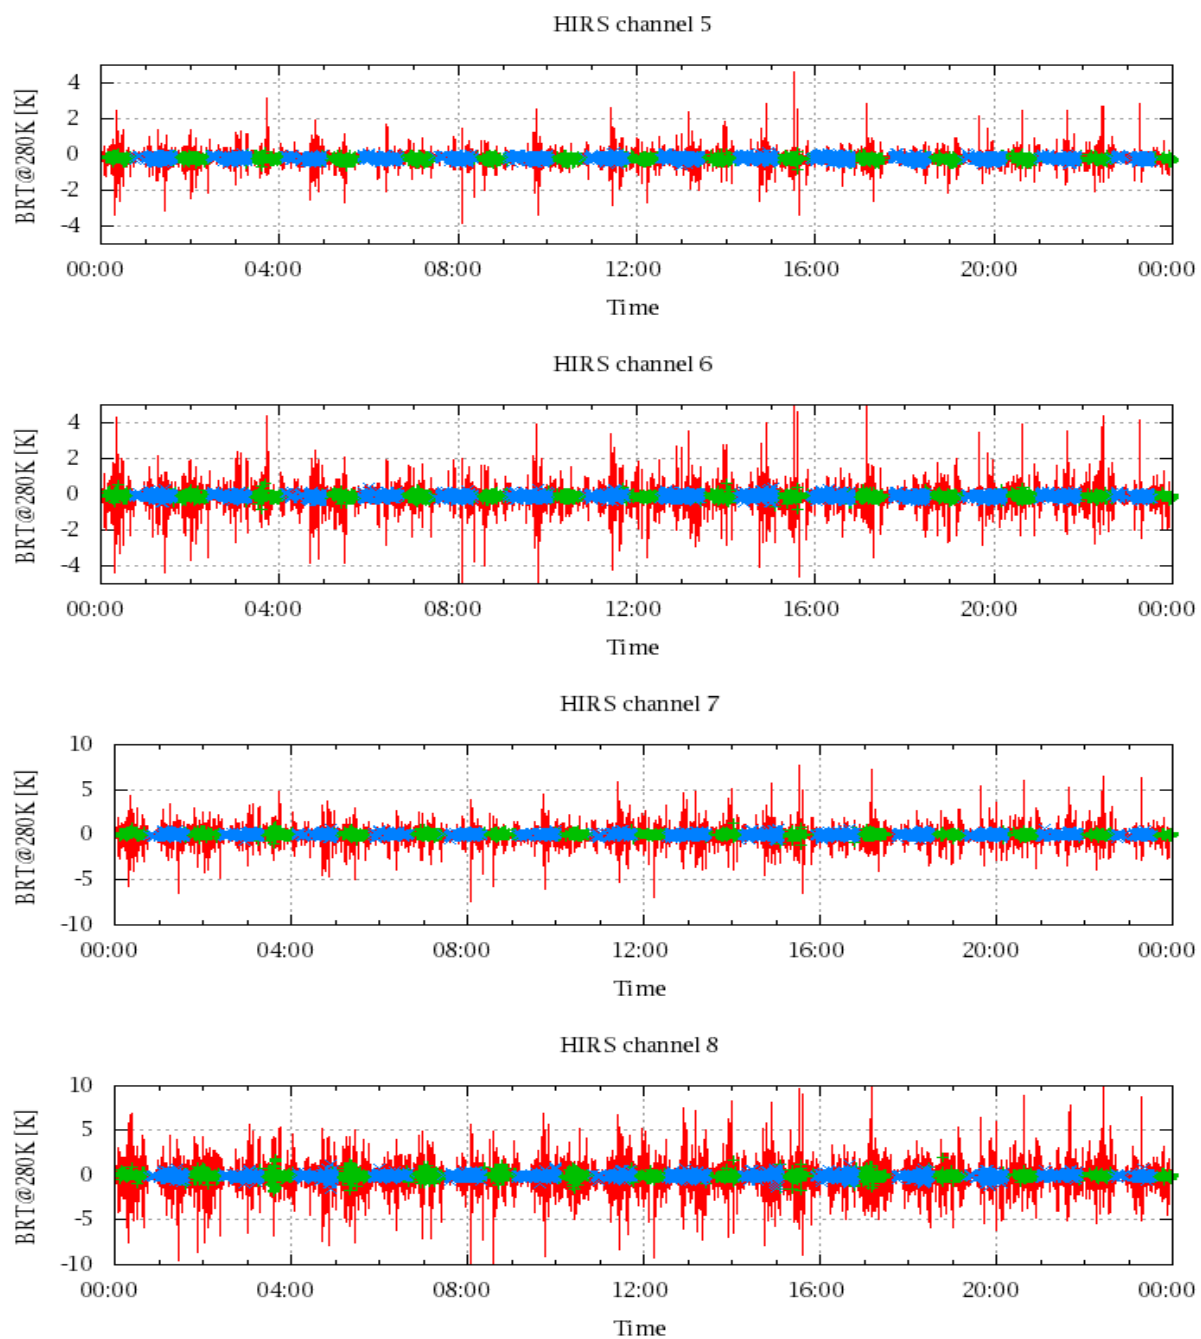


Figure 18: Radiance Differences in BRT

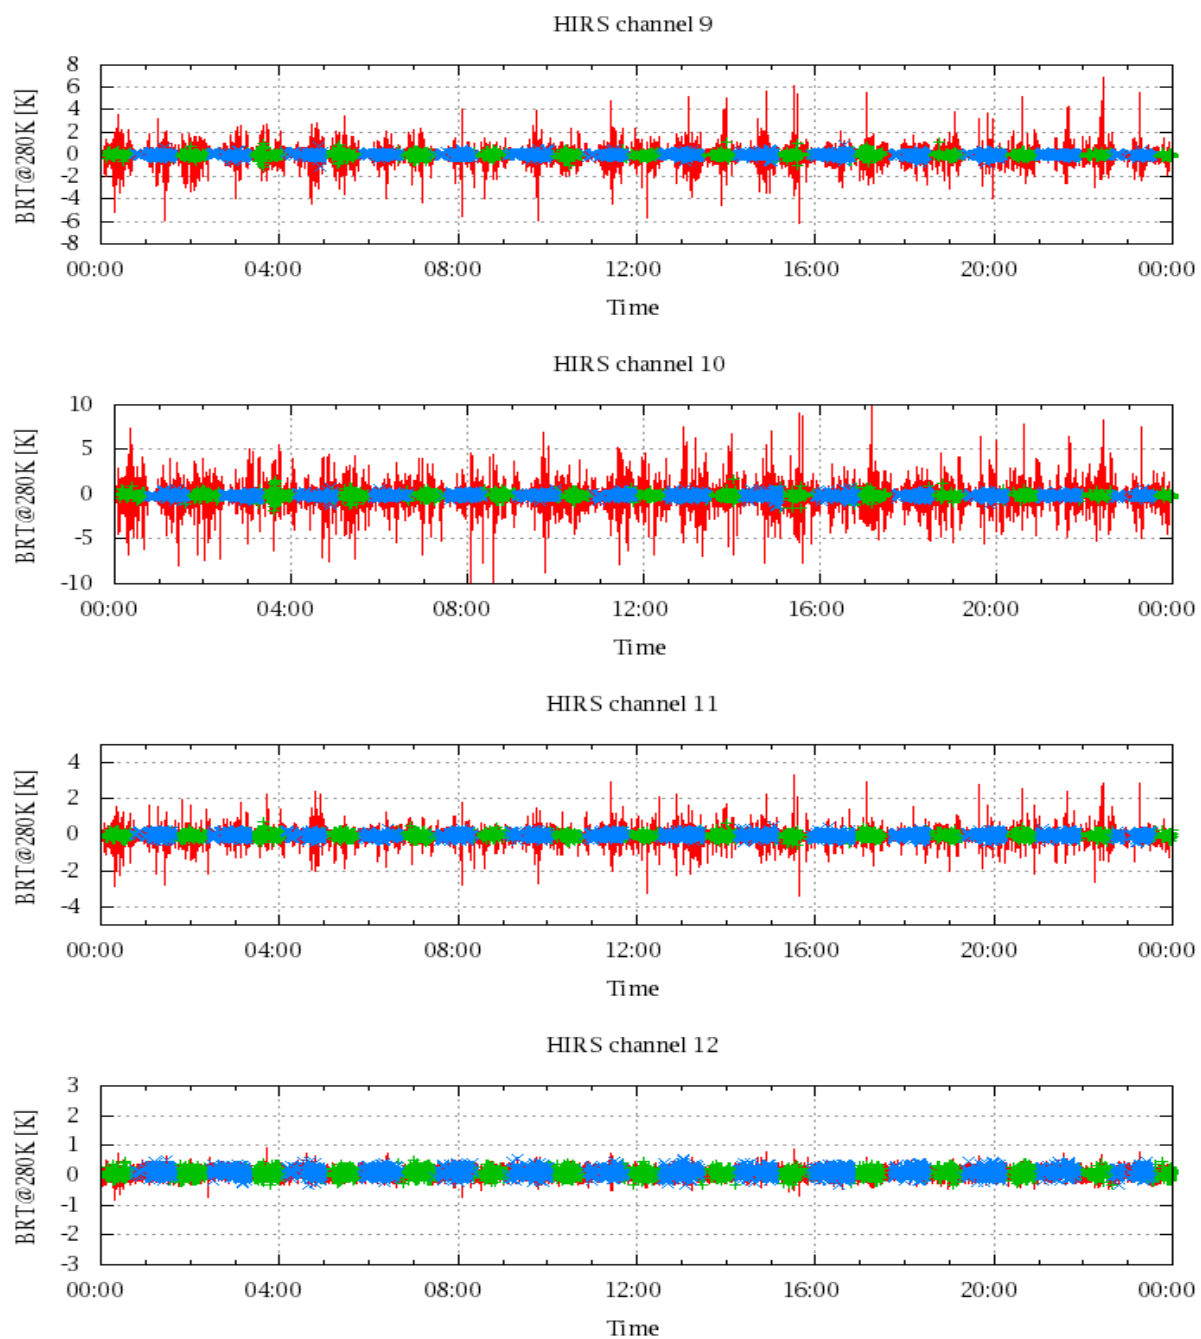


Figure 19: Radiance Differences in BRT

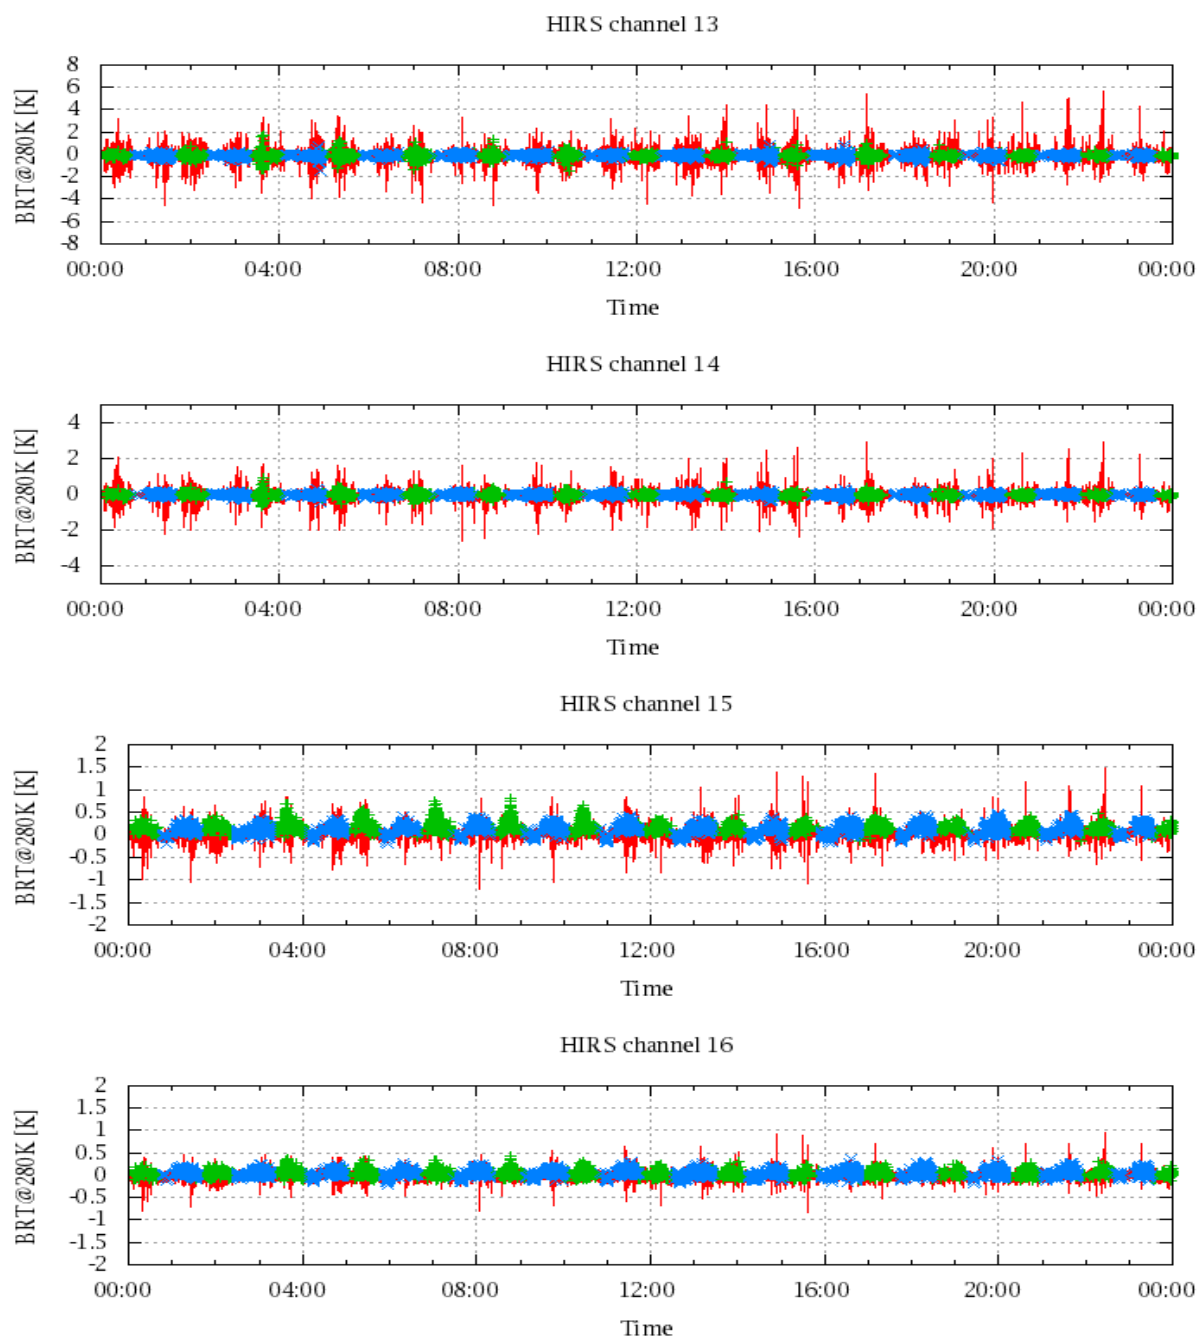


Figure 20: Radiance Differences in BRT

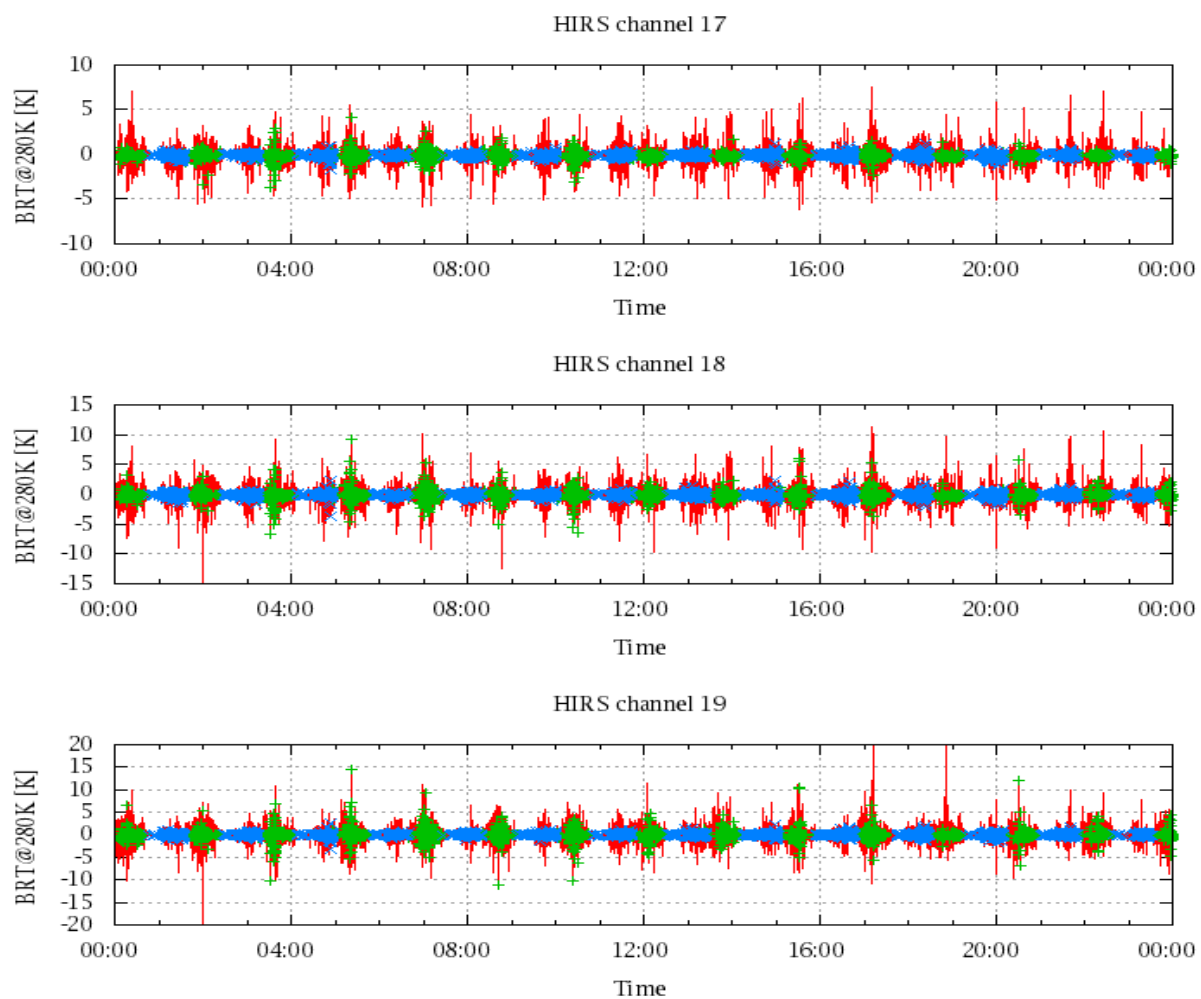


Figure 21: Radinace Differences in BRT