

# IASI L0 and L1 Daily Monitoring Report Metop-A

IASI monitoring team

04/09/2018 00:00:00 - 05/09/2018 00:00:00

## 1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the MetOp-A satellite retrieved from the IASI L0 and L1 ENG product (3 minute data packet) for 04/09/2018 00:00:00 - 05/09/2018 00:00:00 .

The monitoring data are extracted on PDU basis.

Data extraction, calibration, processing and statistics are performed at EUMETSAT.

## 2 Data quantity 04/09/2018 00:00:00 - 05/09/2018 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	480	-
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	12751	12753	20180904025213.530	20180904025215.476
PX1 (130)	9045	9047	20180904034834.913	20180904034835.347
PX2 (135)	14517	14519	20180904014715.805	20180904014716.239
PX2 (135)	15142	15144	20180904015002.719	20180904015003.153
PX3 (140)	6017	6019	20180904022218.484	20180904022218.914
PX3 (140)	13843	13845	20180904025705.631	20180904025706.065
PX3 (140)	1685	1687	20180904031552.769	20180904031553.203
PX4 (145)	5234	5236	20180904021849.840	20180904021850.274
PX4 (145)	6800	6802	20180904022547.163	20180904022547.597
PX4 (145)	11651	11653	20180904024721.215	20180904024721.648
PX4 (145)	13843	13845	20180904025705.631	20180904025706.065
IMG (150)	2026	2028	20180904021849.840	20180904021850.274
IMG (150)	3800	3802	20180904022547.163	20180904022547.597
IMG (150)	10542	10544	20180904025213.316	20180904025213.749
VER (160)	12396	12398	20180904021725.735	20180904021725.735
AUX (180)	-	-	-	-

Table 2: L0 data gaps



### 3 Instrument modes

Time	Transition from	Transition to
04/09/2018 00:00:05	-	Normal operation

Table 3: Instrument modes

### 4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.51 %	-
GQisFlagQual set (PX2)	99.52 %	-
GQisFlagQual set (PX3)	99.50 %	-
GQisFlagQual set (PX4)	99.50 %	-
GQisFlagQual set (all)	99.51 %	-

Table 4: Quality flags

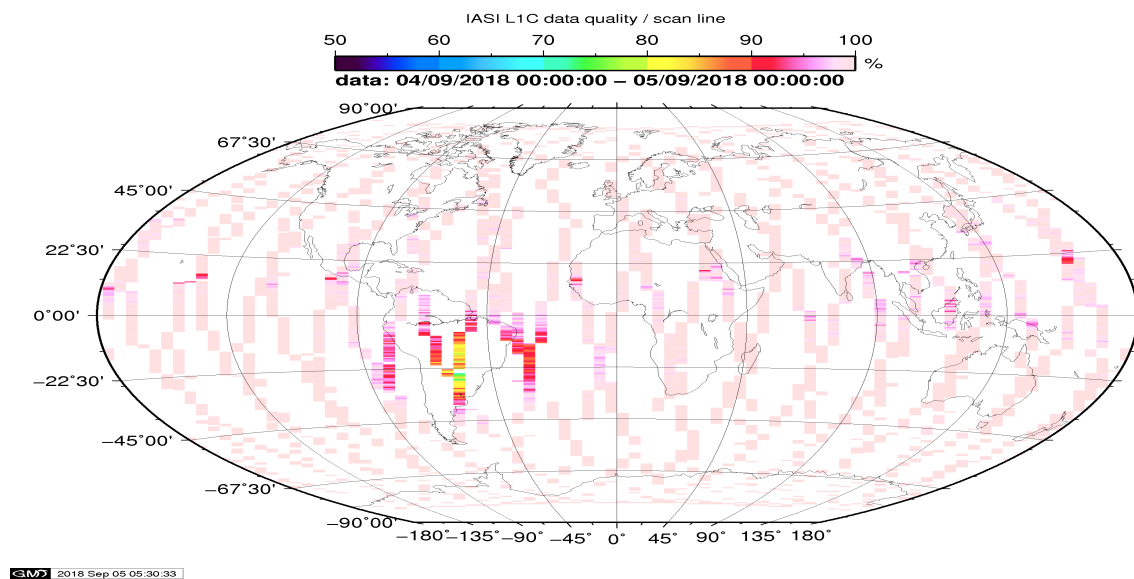


Figure 1: L1C data quality

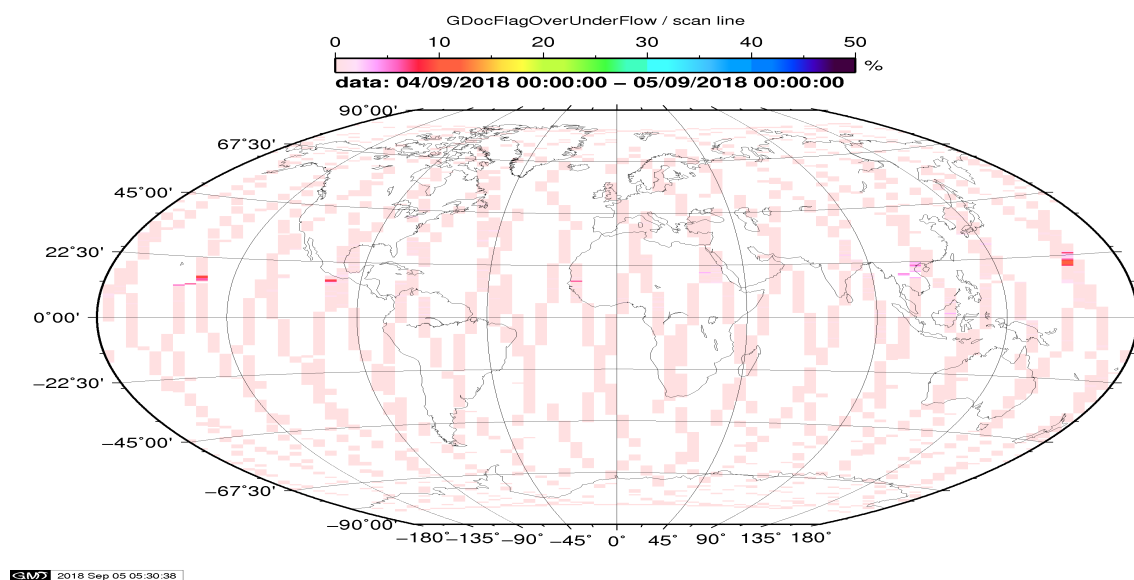


Figure 2: Flag of Over and Under Flows

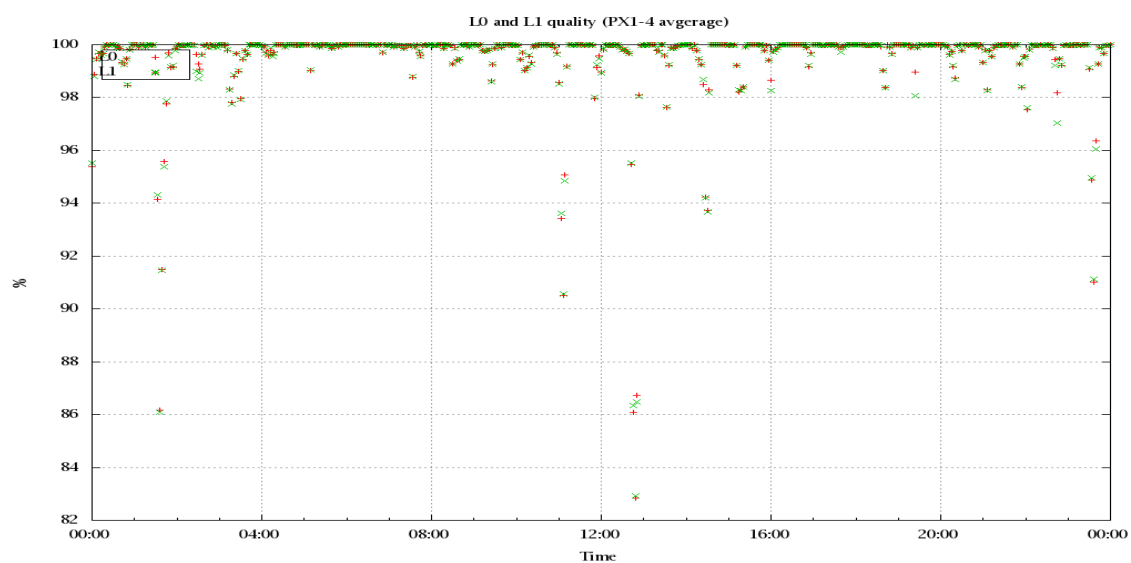


Figure 3: Level 0 and 1C overall quality

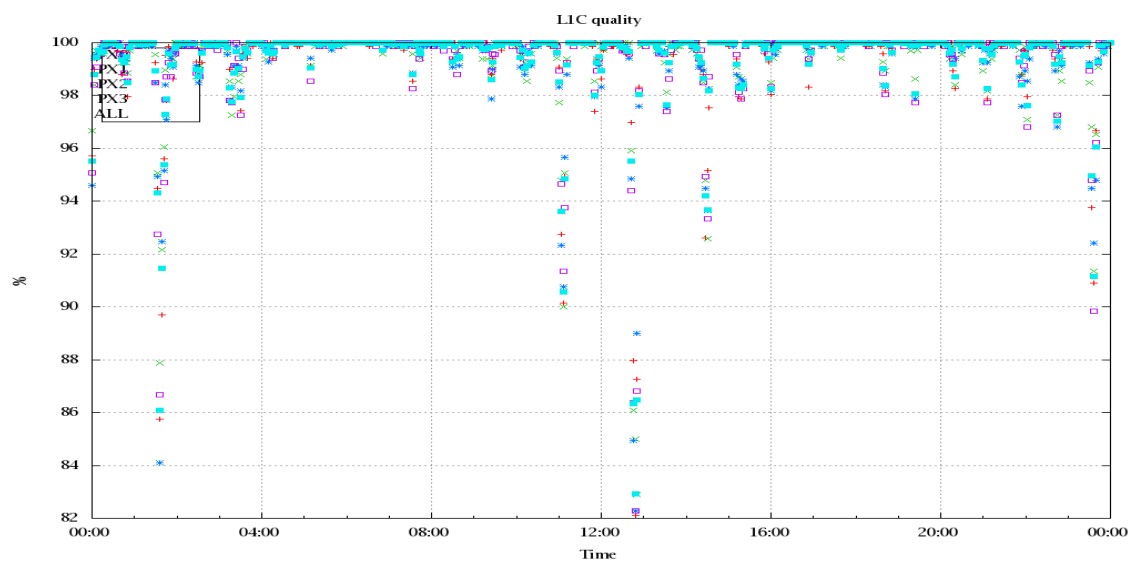


Figure 4: Level 1C quality

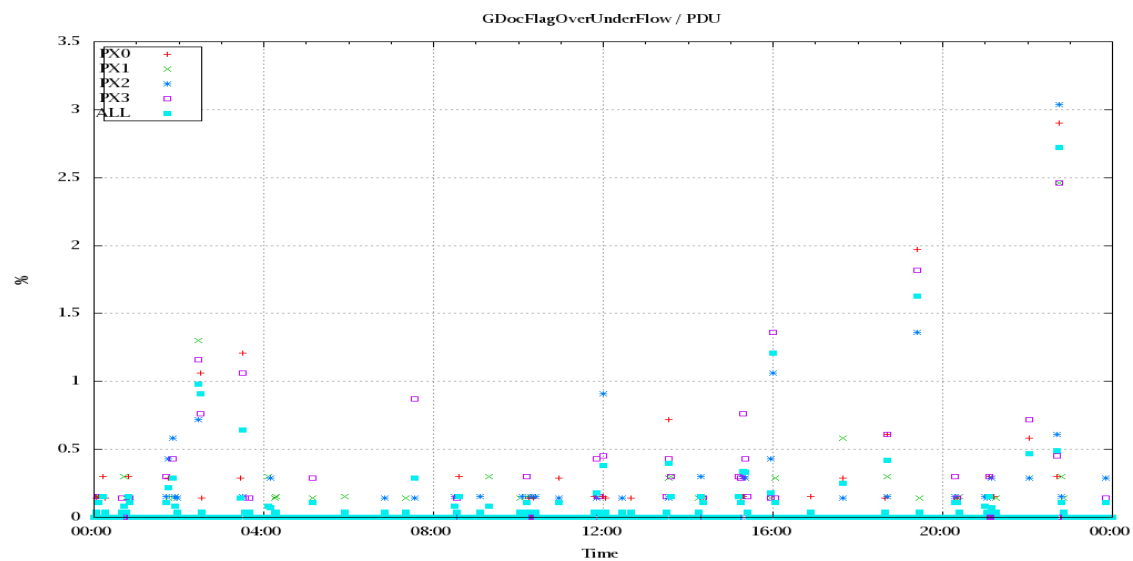


Figure 5: OverUnderFlowFlag timeseries

## 5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class). A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T,WV, and Ozon. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used. Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 10 to 16 the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixel and scan position 10 to 20) and the average bias OBS-CAL (over all pixel and scan position 10 to 20) of the last 30 days.

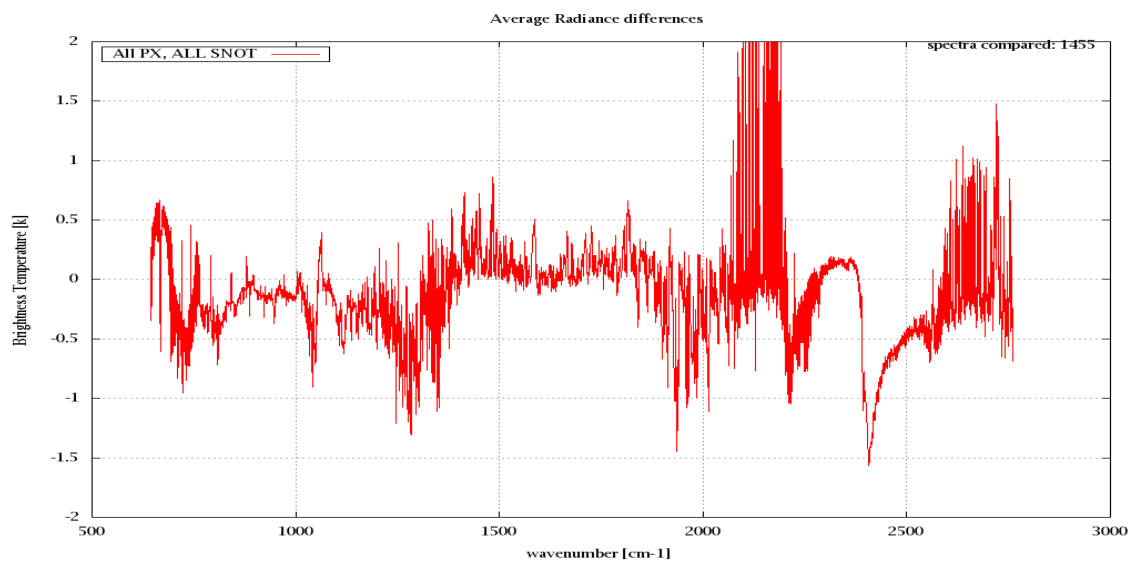


Figure 6: Average Radiance differences: OBS-CAL

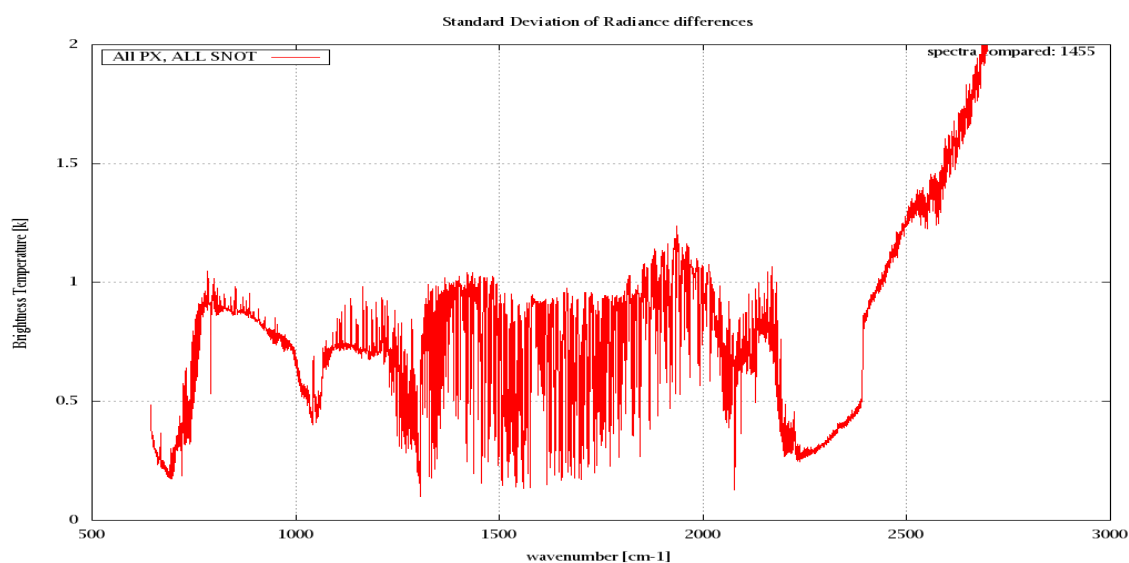


Figure 7: Standard Deviation of Radiance differences

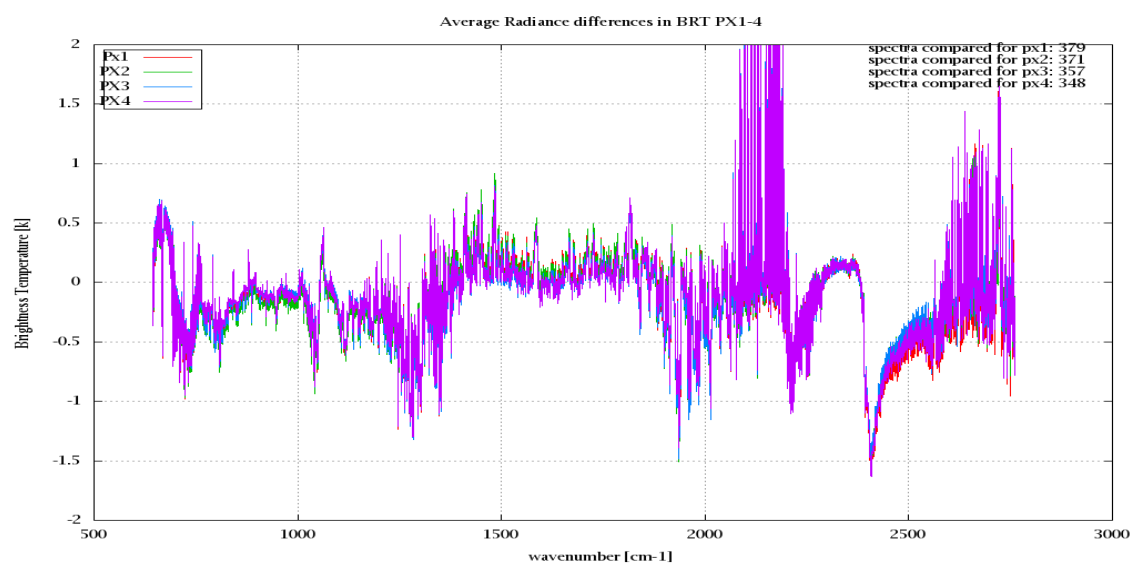


Figure 8: Average Radiance differences: OBS-CAL

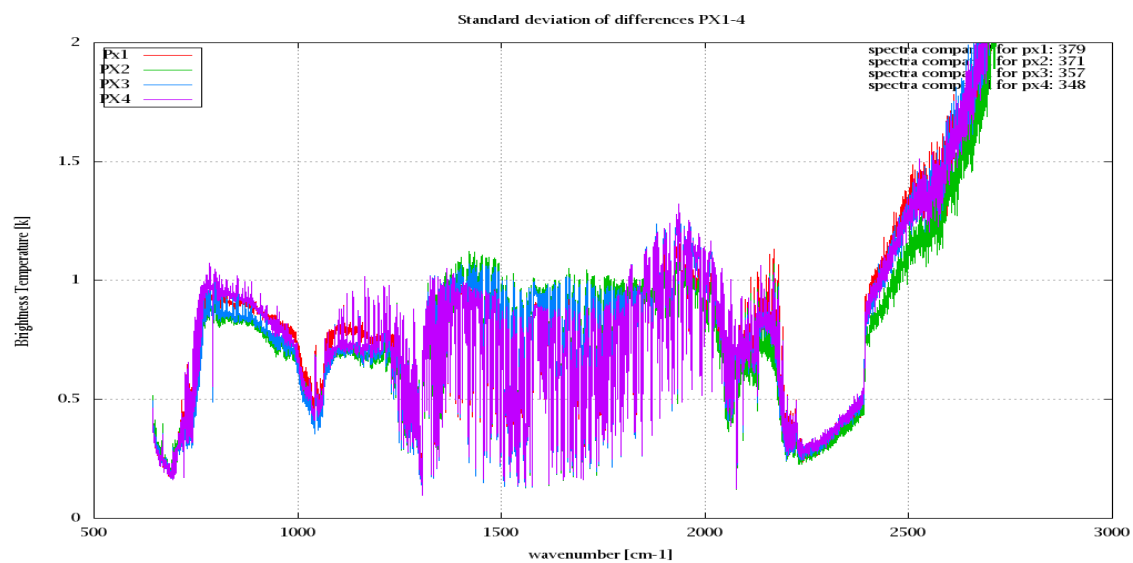


Figure 9: Standard Deviation of Radiance differences



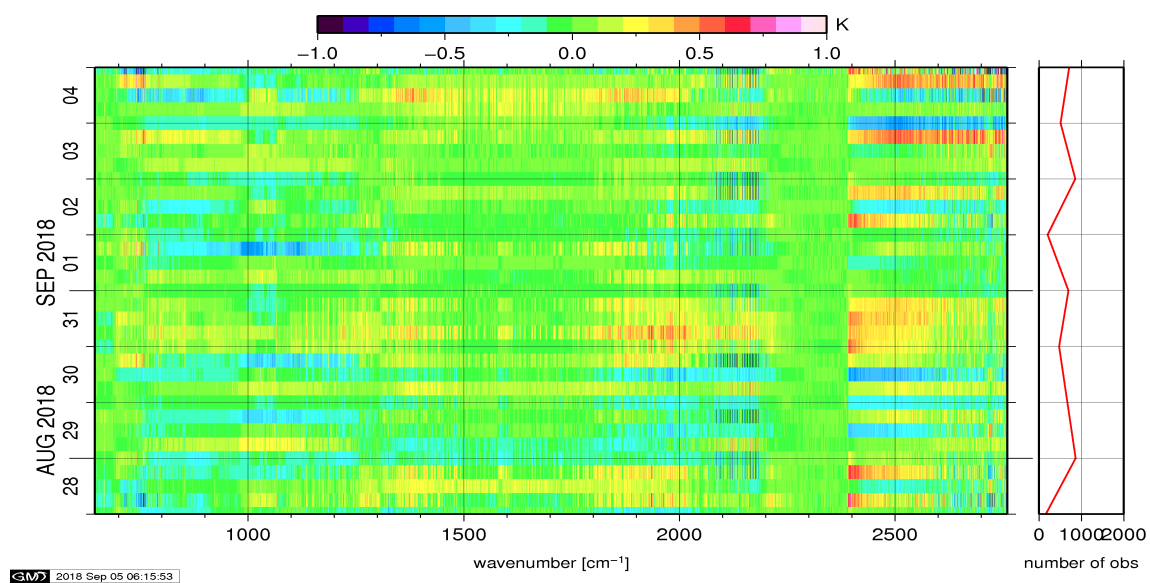


Figure 10: Radiance Anomaly in BRT: All Channels

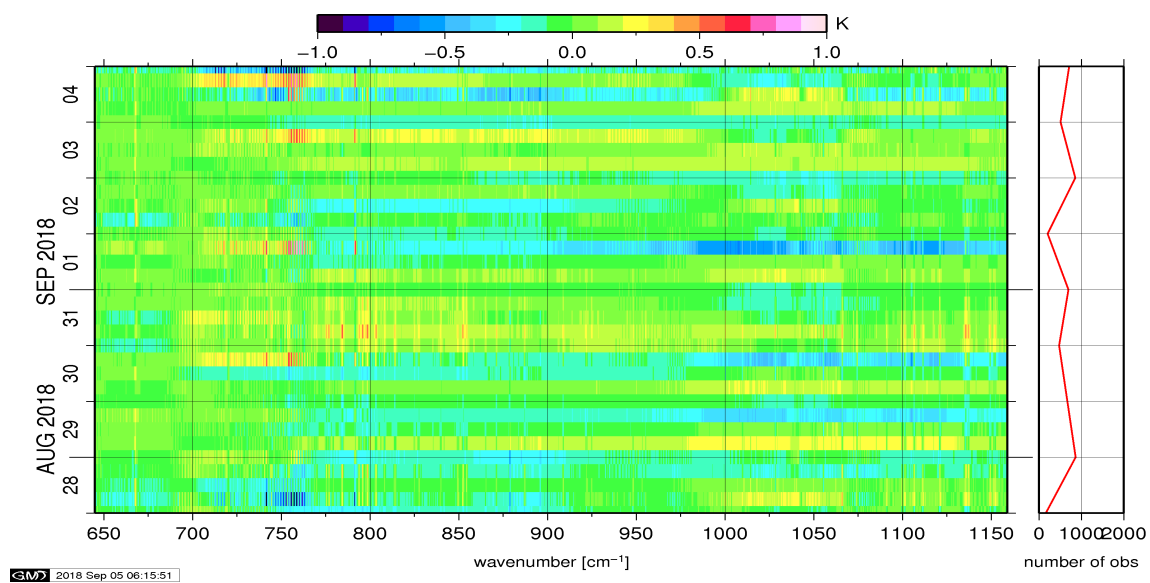


Figure 11: Radiance Anomaly in BRT: IASI Band 1

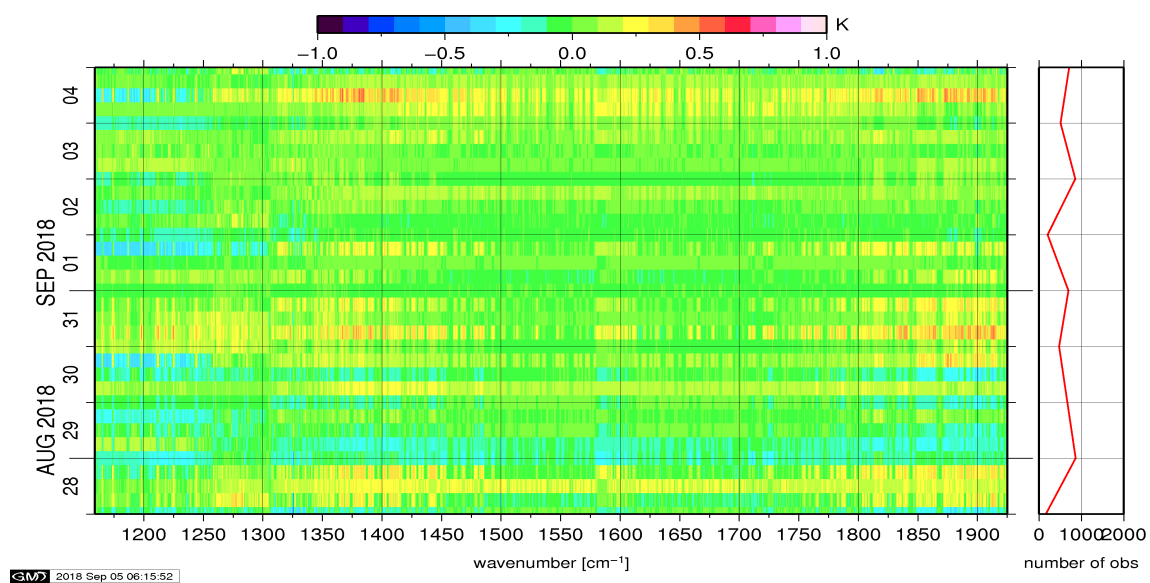


Figure 12: Radiance Anomaly in BRT: IASI Band 2

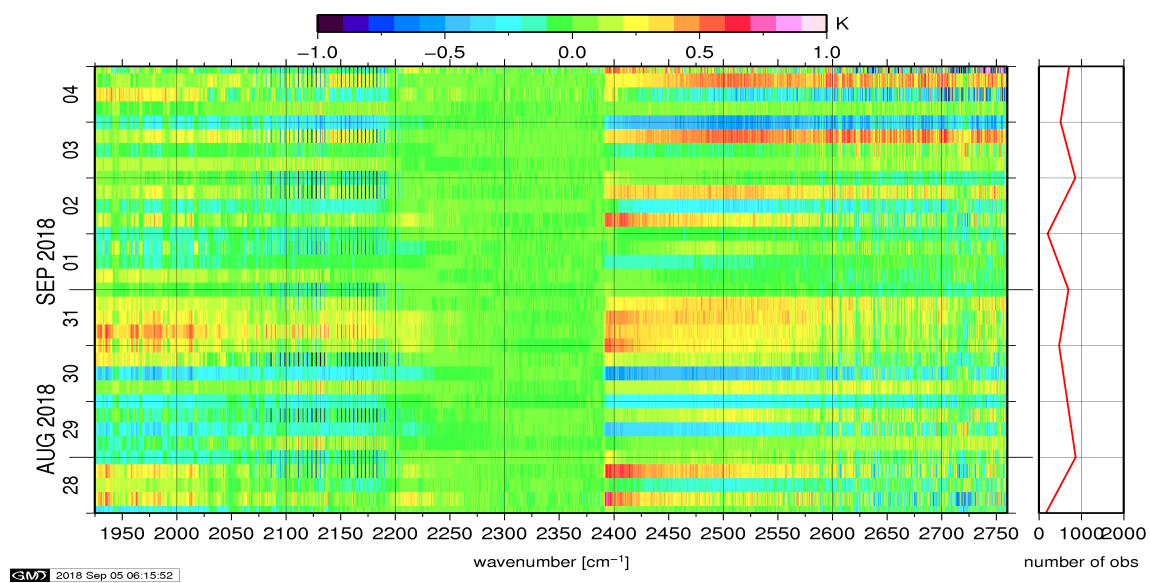


Figure 13: Radiance Anomaly in BRT: IASI Band 3

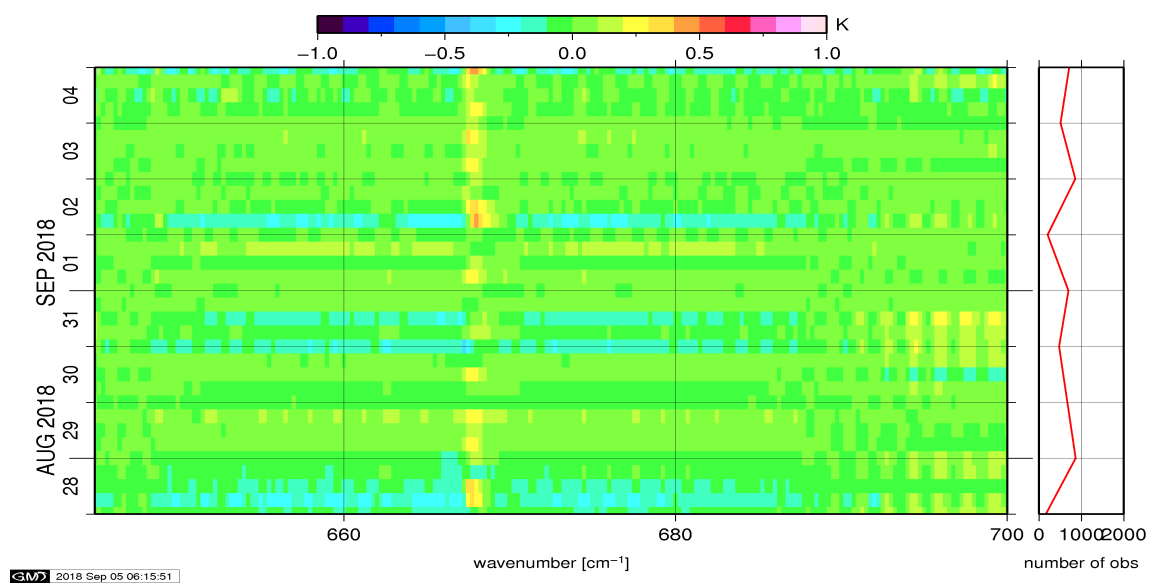


Figure 14: Radiance Anomaly in BRT: CO2 14

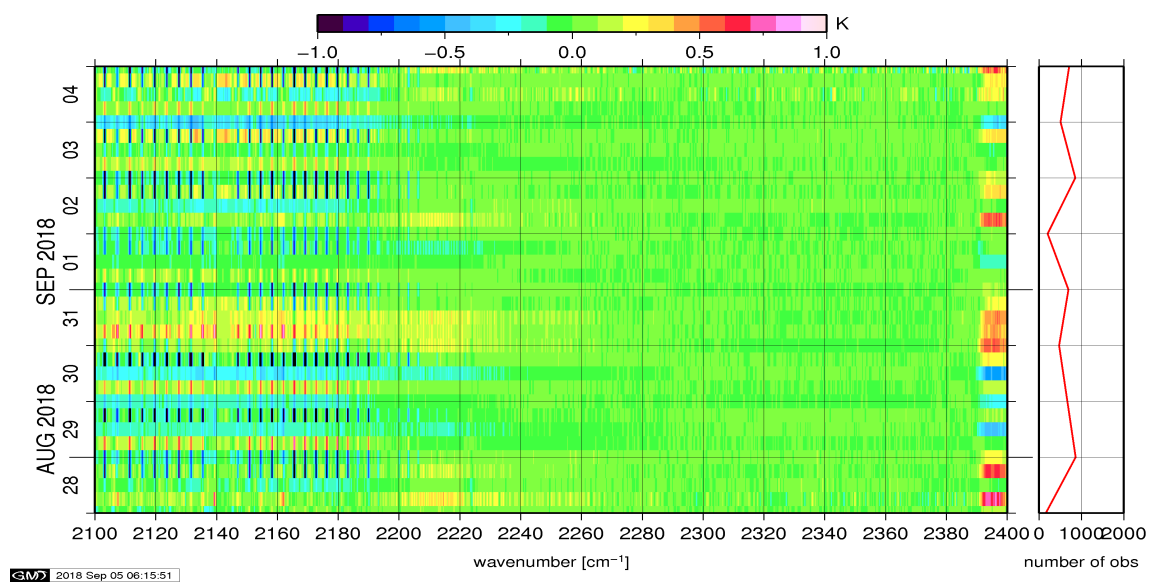


Figure 15: Radiance Anomaly in BRT: CO2 4.3

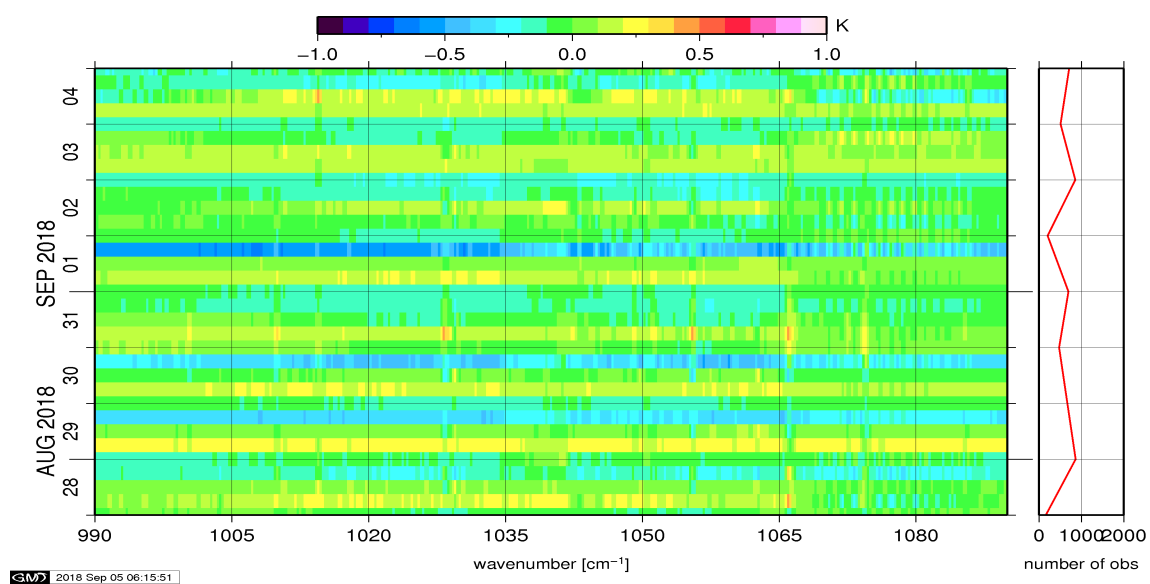


Figure 16: Radiance Anomaly in BRT: O3

## 6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board MetOp is performed on all pixel with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference temperature. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

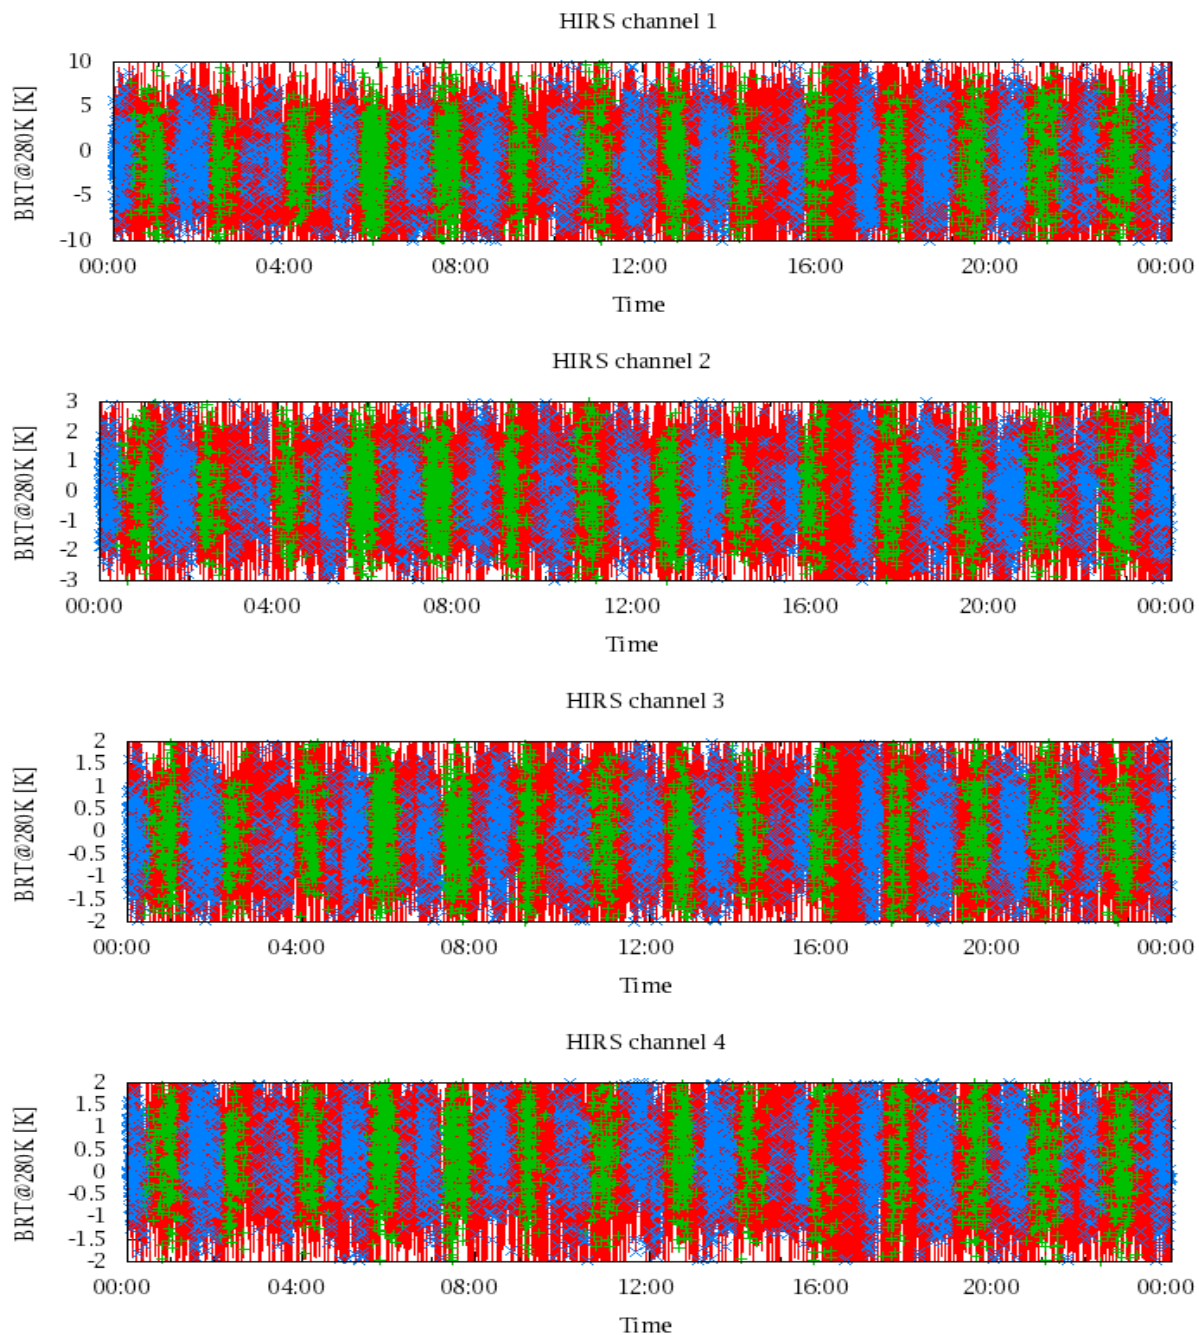


Figure 17: Radiance Differences in BRT

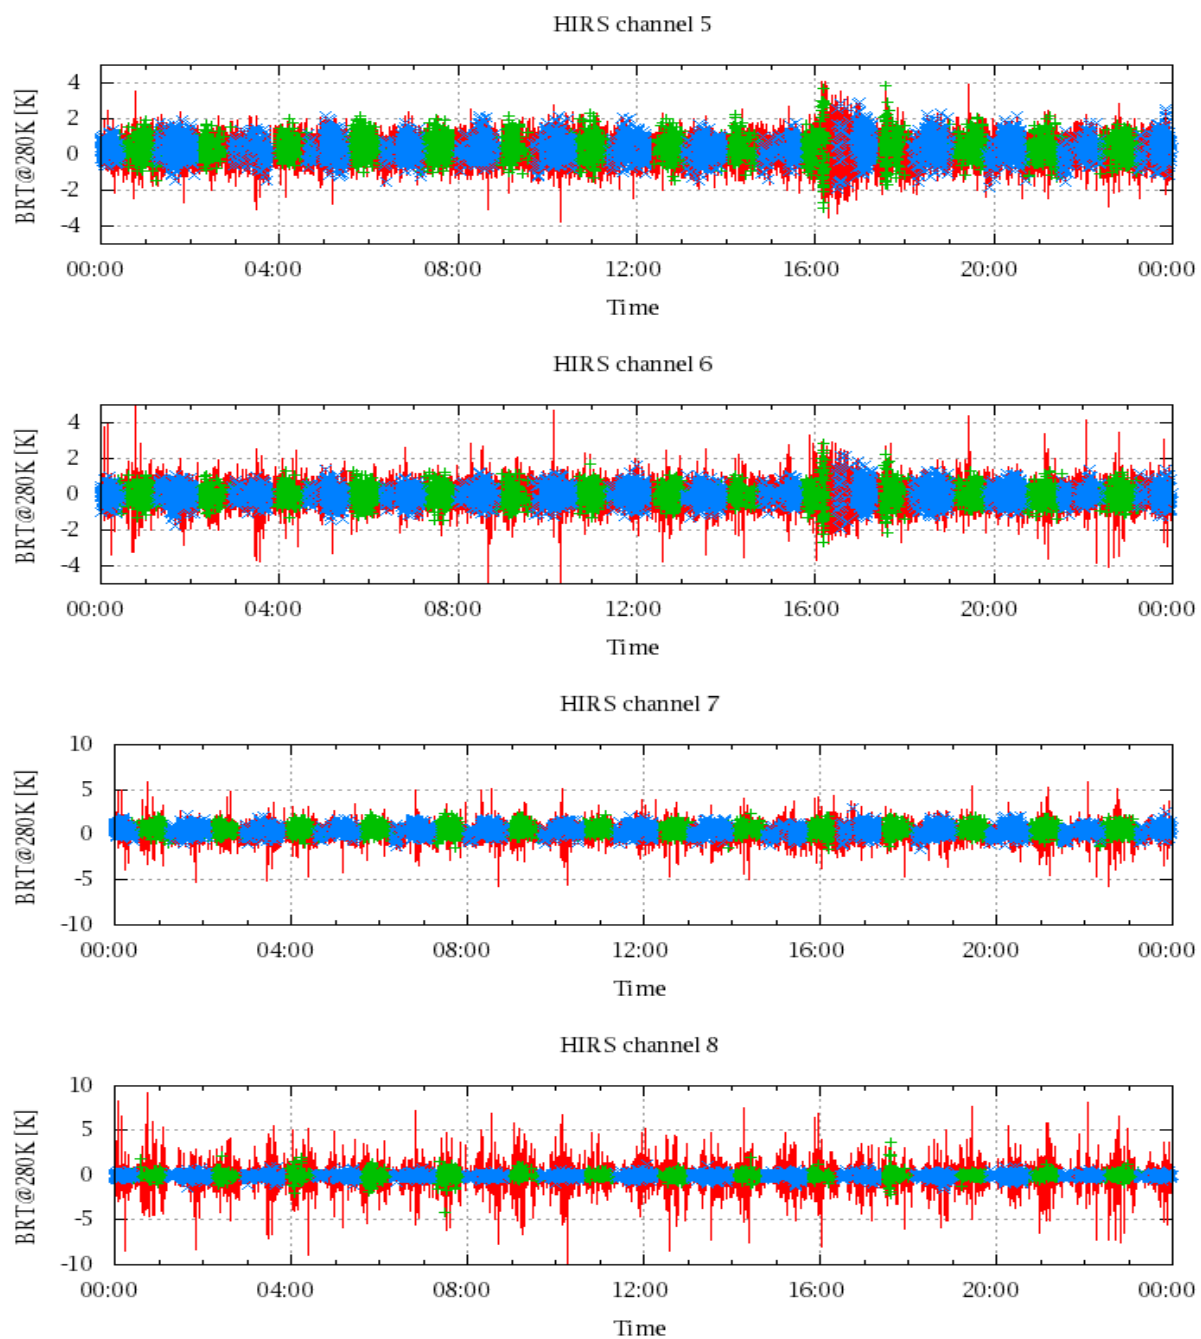


Figure 18: Radiance Differences in BRT

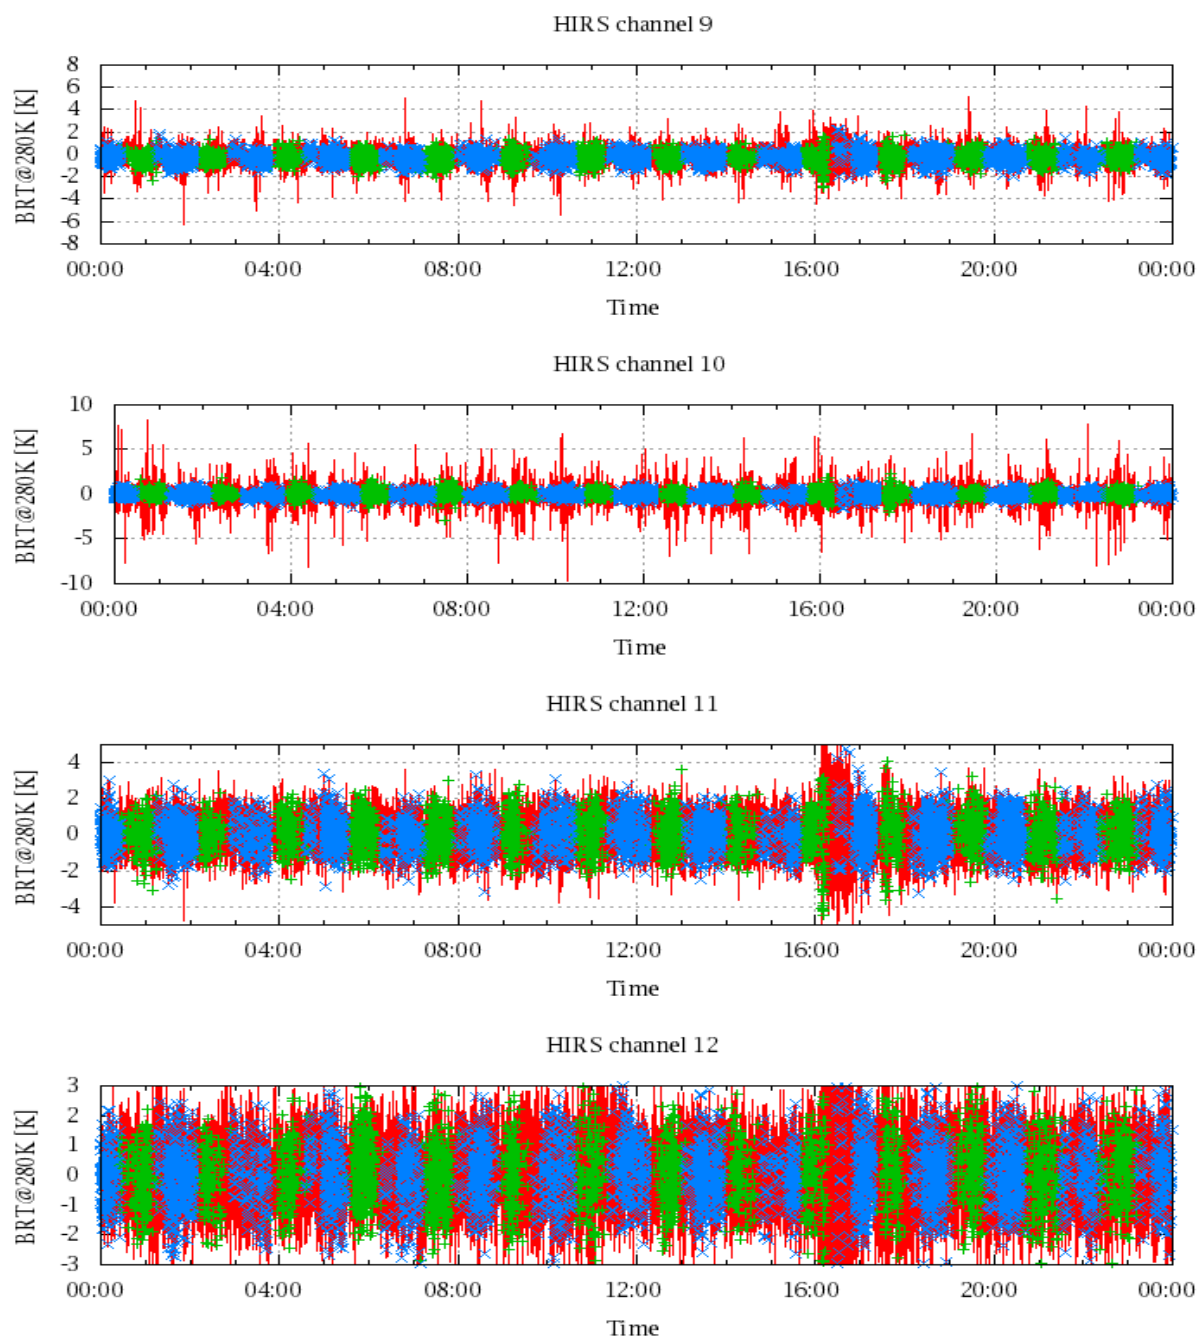


Figure 19: Radiance Differences in BRT



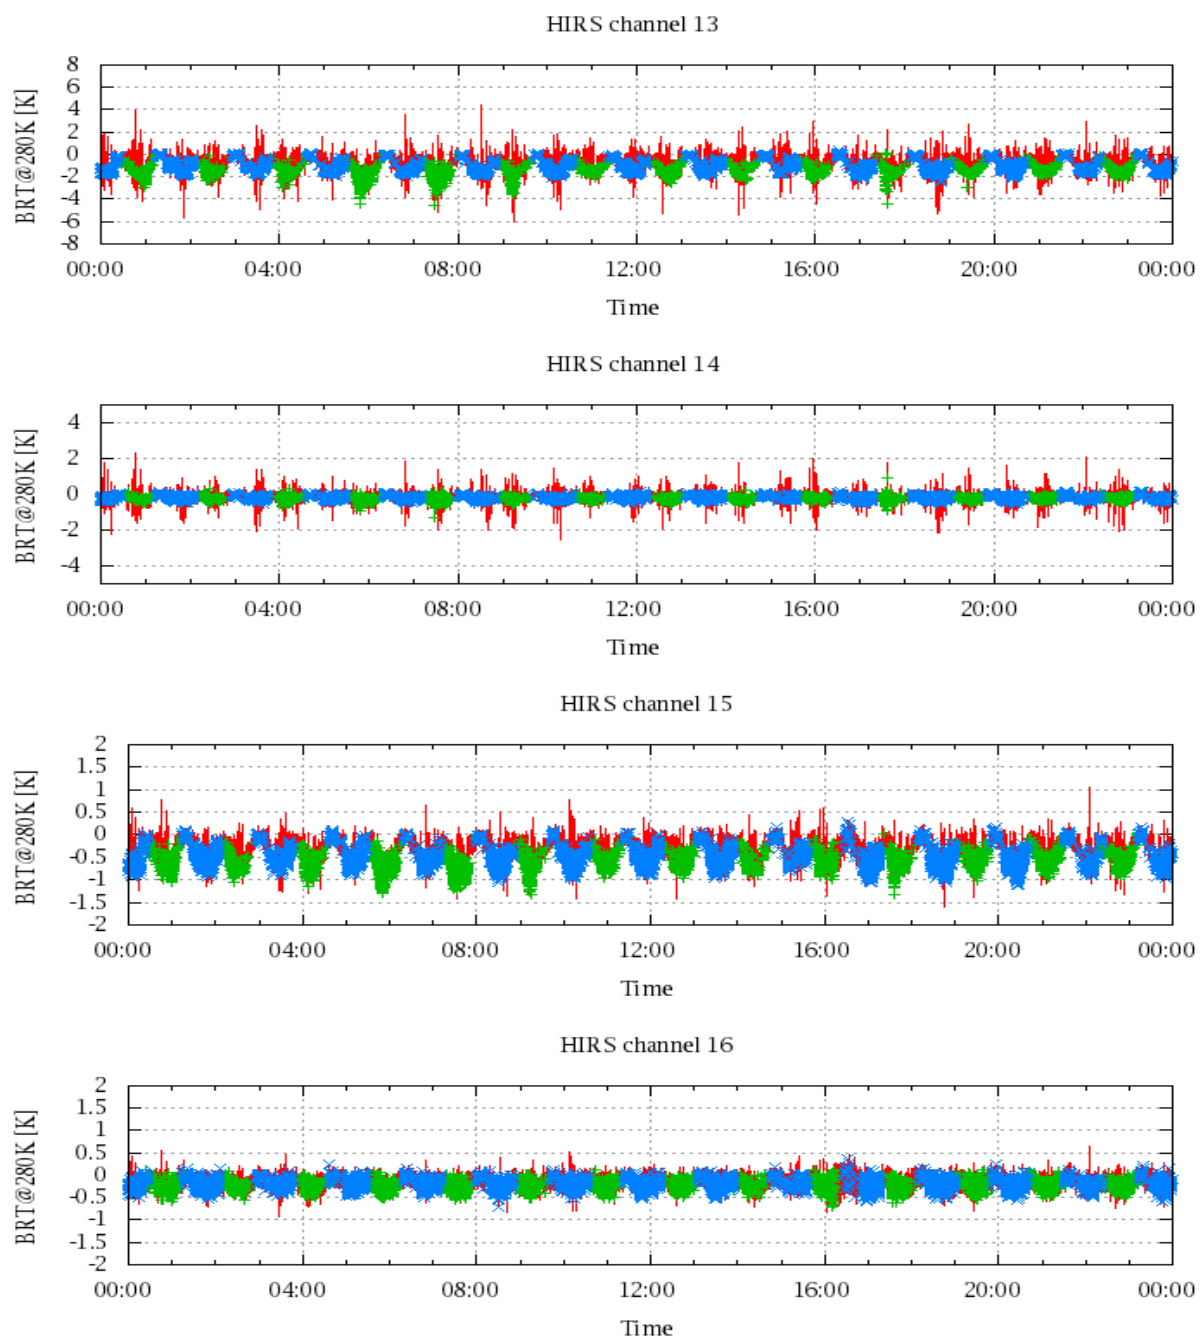


Figure 20: Radiance Differences in BRT



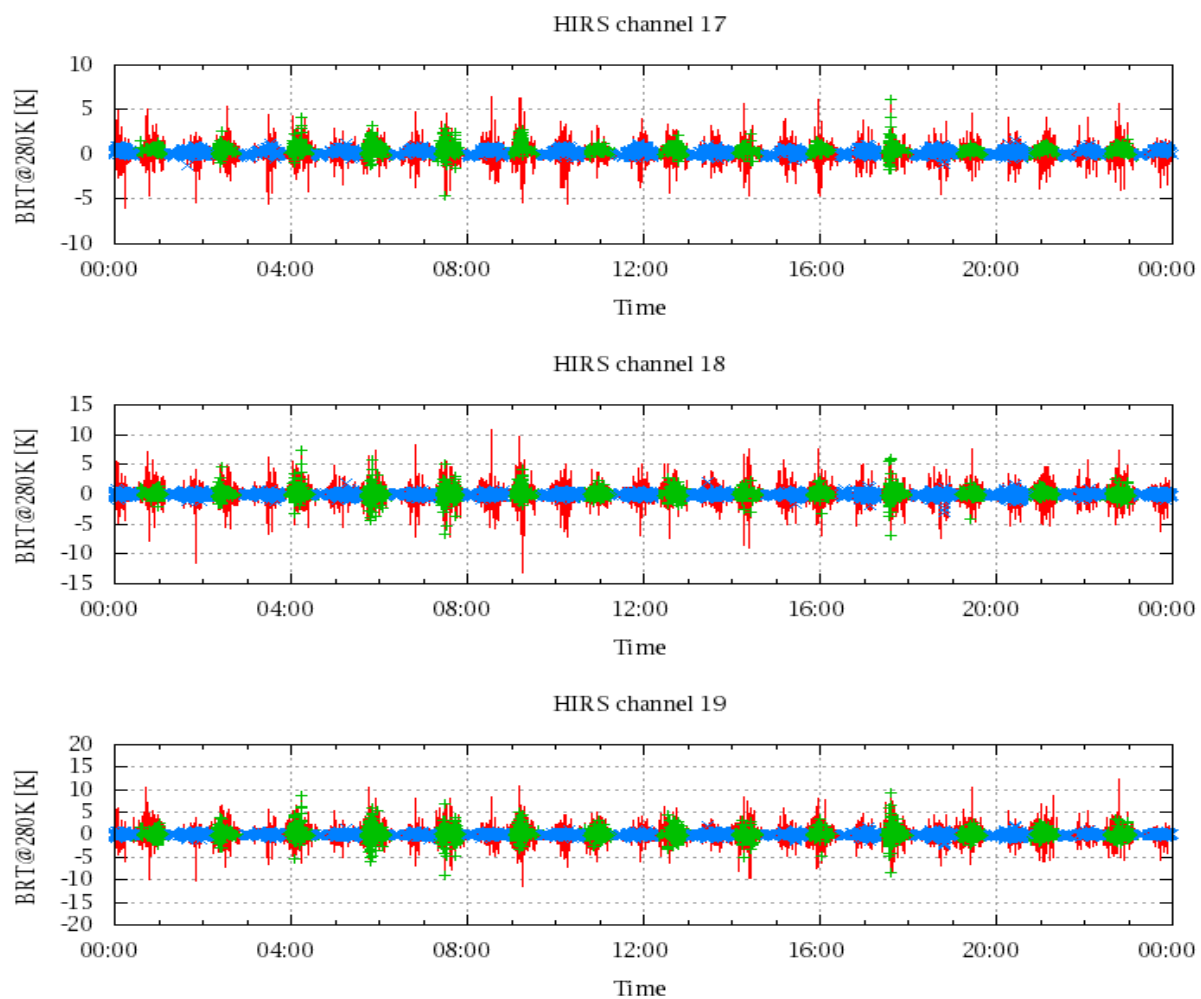


Figure 21: Radinace Differences in BRT