## IASI L0 and L1 Daily Monitoring Report **Metop-C**

#### IASI monitoring team

14/12/2020 00:00:00 - 15/12/2020 00:00:00

#### 1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the Metop-C satellite retrieved from the IASI L0 and L1 ENG product (3 minutes data packet) for 14/12/2020 00:00:00 - 15/12/2020 00:00:00.

The monitoring data are extracted on PDU basis.

## 2 Data quantity $14/12/2020\ 00:00:00\ -\ 15/12/2020\ 00:00:00$

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	286	e
L1 ENG PDUs	287	e
L1 ENG distinct GEPSGranule	286	a
L1 DPX PDUs (RM: IASI-HIRS)	0	e
L1 DPS Files (RM: OBS-CAL NWP based)	287	-

Table 1: Data quantity

APID	Seq	Seq to	Time from	Time to
	from			
PX1 (130)	5252	5928	20201214134459.861	20201214134800.830
PX2 (135)	5252	5928	20201214134459.861	20201214134800.830
PX3 (140)	5252	5928	20201214134459.861	20201214134800.830
PX4 (145)	5252	5928	20201214134459.861	20201214134800.830
IMG (150)	12504	13270	20201214134459.861	20201214134800.181
VER (160)	9064	9180	20201214134455.103	20201214134807.099
VER (160)	16379	0	20201214165959.095	20201214170007.091
VER (160)	0	16380	20201214170007.091	20201214170007.091
VER (160)	-1	1	20201214170007.091	20201214170015.091
AUX (180)	1812	1836	20201214134455.537	20201214134807.533

Table 2: L0 data gaps

### 3 Instrument modes

Time	Transition from	Transition to
14/12/2020 00:00:10	-	Heater 2
14/12/2020 09:22:18	Heater 2	Auxiliary ASE synchronised
14/12/2020 09:43:06	Auxiliary ASE synchronised	Normal operation

Table 3: Instrument modes

# 4 L0 and L1 Data Quality

Flag	Value	Action
L0 IASI PDUs	286	e
L1 ENG PDUs	287	e
L1 ENG distinct GEPSGranule	286	a
GQisFlagQual set (PX1)	99.42 %	-
GQisFlagQual set (PX2)	99.50 %	-
GQisFlagQual set (PX3)	99.48 %	-
GQisFlagQual set (PX4)	99.38 %	-
GQisFlagQual set (all)	99.44 %	-

Table 4: Quality flags

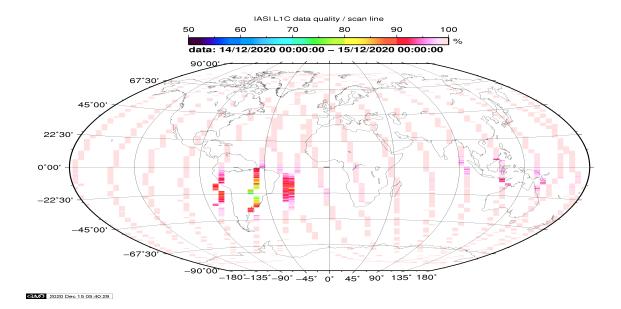


Figure 1: L1C data quality

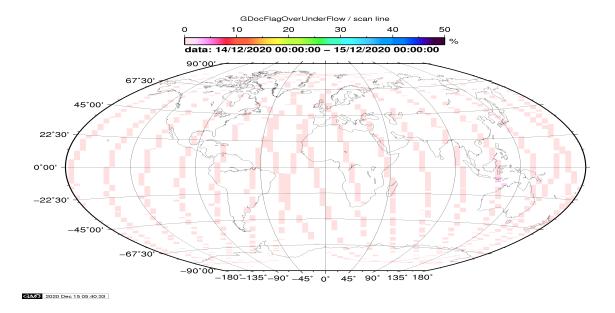


Figure 2: Flag of Over and Under Flows

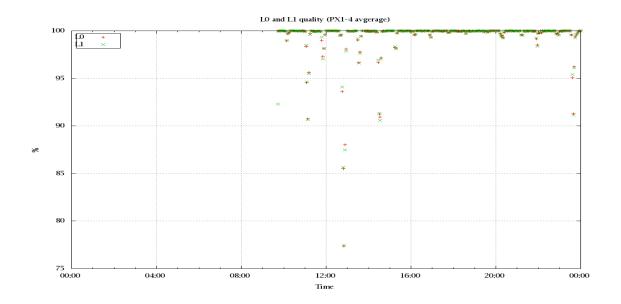


Figure 3: Level 0 and 1C overall quality

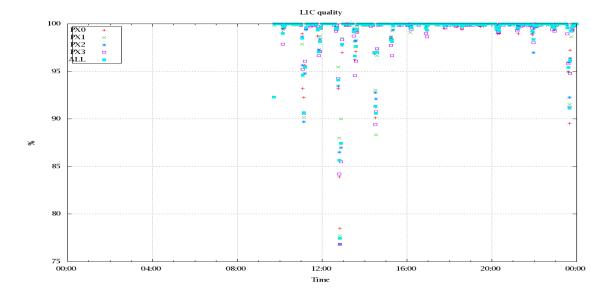


Figure 4: Level 1C quality

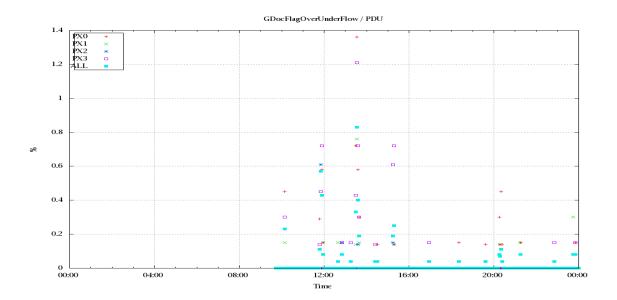


Figure 5: Timeseries of flag of Over and Under Flows

### 5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud indentification is based on cloud flag of colocated AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class).

A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T, water vapor and Ozone. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used.

Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 28 to 34, the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixels and scan positions 10 to 20) and the average bias OBS-CAL (over all pixels and scan positions 10 to 20) of the last 30 days.

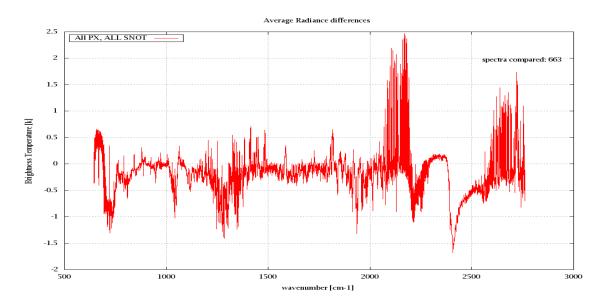


Figure 6: Average Radiance differences: OBS-CAL

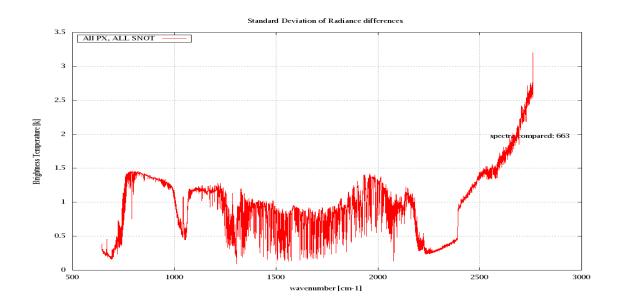


Figure 7: Standard Deviation of Radiance differences

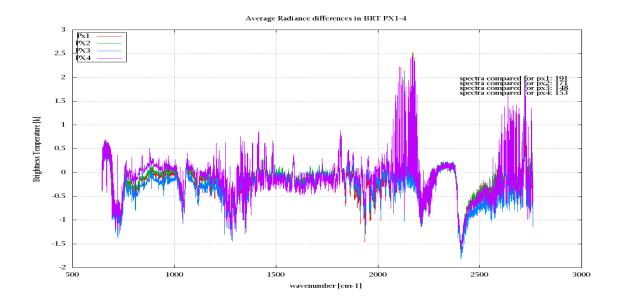


Figure 8: Average Radiance differences: OBS-CAL

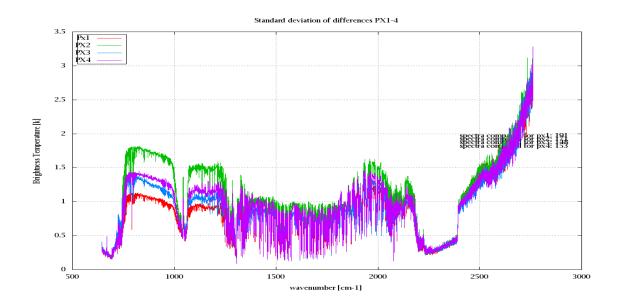


Figure 9: Standard Deviation of Radiance differences

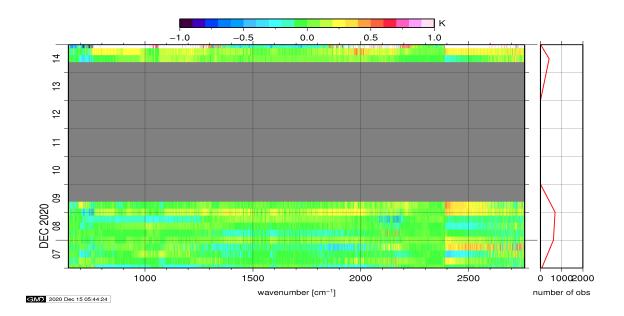


Figure 10: Radiance Anomaly in BT: All Channels

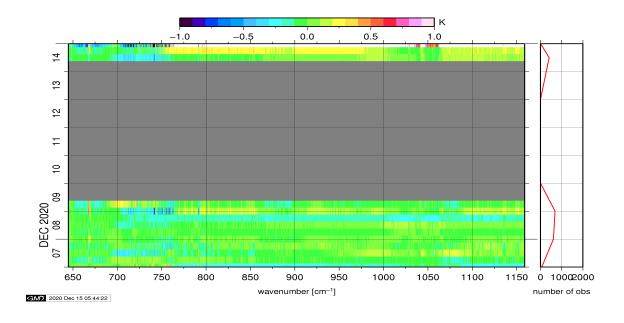


Figure 11: Radiance Anomaly in BT: IASI Band 1

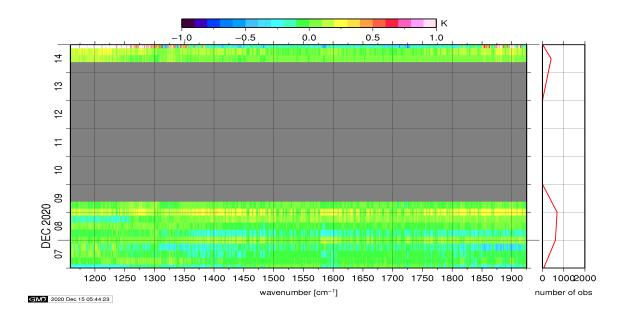


Figure 12: Radiance Anomaly in BT: IASI Band 2

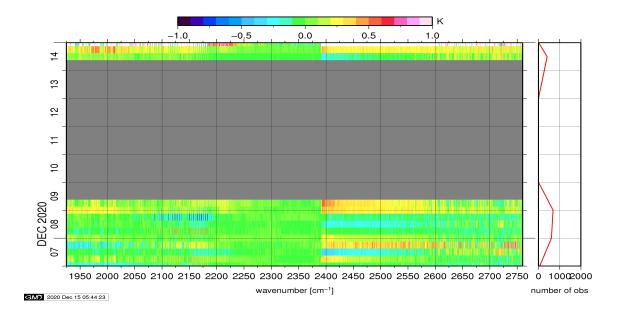


Figure 13: Radiance Anomaly in BT: IASI Band 3

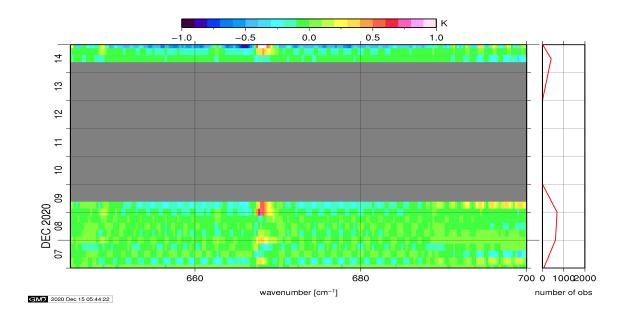


Figure 14: Radiance Anomaly in BT: CO2 14

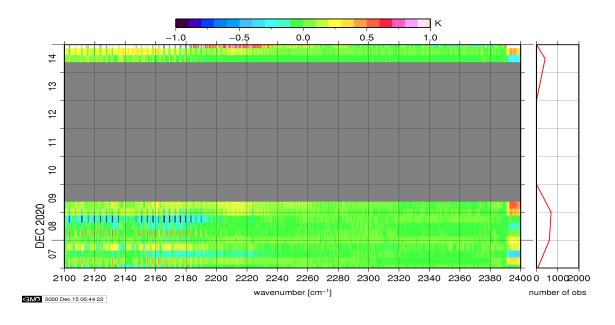


Figure 15: Radiance Anomaly in BT: CO2 4.3

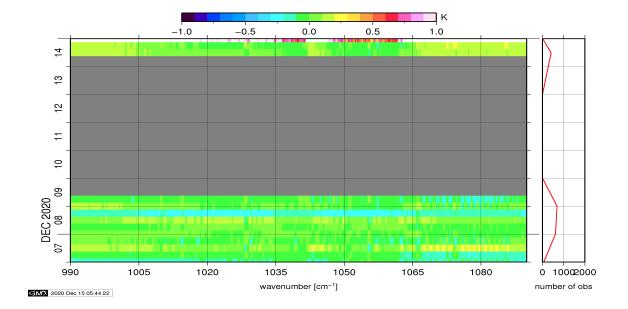


Figure 16: Radiance Anomaly in BT: O3