

IASI L0 and L1 Daily Monitoring Report **Metop-B**

IASI monitoring team

17/03/2026 00:00:00 - 18/03/2026 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the Metop-B satellite retrieved from the IASI L0 and L1 ENG product (3 minutes data packet) for 17/03/2026 00:00:00 - 18/03/2026 00:00:00 .

The monitoring data are extracted on PDU basis.

2 Data quantity 17/03/2026 00:00:00 - 18/03/2026 00:00:00

Product Type	Number	Action
L0 HKTU PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSSGranule	472	-
L1 DPX PDUs (RM: IASI-HIRS)	0	e
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	5405	0	20260317024545.663	20260317024843.390
PX2 (135)	5405	0	20260317024545.663	20260317024843.390
PX3 (140)	5405	0	20260317024545.663	20260317024843.390
PX4 (145)	5375	0	20260317024537.667	20260317024843.390
IMG (150)	13365	0	20260317024545.663	20260317024843.390
VER (160)	1765	1060	20260317024545.663	20260317031740.063
VER (160)	1060	1065	20260317031740.063	20260317031740.063
VER (160)	1065	1070	20260317031740.063	20260317031740.063
VER (160)	1070	1075	20260317031740.063	20260317031740.063
VER (160)	1075	1080	20260317031740.063	20260317031740.063
VER (160)	1080	1061	20260317031740.063	20260317031740.063
VER (160)	1061	1066	20260317031740.063	20260317031740.063
VER (160)	1066	1071	20260317031740.063	20260317031740.063
VER (160)	1071	1076	20260317031740.063	20260317031740.063
VER (160)	1076	1081	20260317031740.063	20260317031740.063
VER (160)	1081	1062	20260317031740.063	20260317031740.063
VER (160)	1062	1067	20260317031740.063	20260317031740.063
VER (160)	1067	1072	20260317031740.063	20260317031740.063
VER (160)	1072	1077	20260317031740.063	20260317031740.063

Continued on next page

Table 2 – continued from previous page

APID	Seq from	Seq to	Time from	Time to
VER (160)	1077	1082	20260317031740.063	20260317031740.063
VER (160)	1082	1063	20260317031740.063	20260317031740.063
VER (160)	1063	1068	20260317031740.063	20260317031740.063
VER (160)	1068	1073	20260317031740.063	20260317031740.063
VER (160)	1073	1078	20260317031740.063	20260317031740.063
VER (160)	1078	1083	20260317031740.063	20260317031740.063
VER (160)	1083	1064	20260317031740.063	20260317031740.063
VER (160)	1064	1069	20260317031740.063	20260317031740.063
VER (160)	1069	1074	20260317031740.063	20260317031740.063
VER (160)	1074	1079	20260317031740.063	20260317031740.063
VER (160)	1079	1084	20260317031740.063	20260317031740.063
AUX (180)	10181	0	20260317024538.097	20260317024850.093

Table 2: L0 data gaps

3 Instrument modes


Time	Transition from	Transition to
17/03/2026 00:06:08	-	Normal operation
17/03/2026 05:20:16	Normal operation	Auxiliary ASE synchronised
17/03/2026 05:22:08	Auxiliary ASE synchronised	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality


Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	472	-
GQisFlagQual set (PX1)	99.69 %	-
GQisFlagQual set (PX2)	99.74 %	-
GQisFlagQual set (PX3)	99.76 %	-
GQisFlagQual set (PX4)	99.68 %	-
GQisFlagQual set (all)	99.72 %	-

Table 4: Quality flags

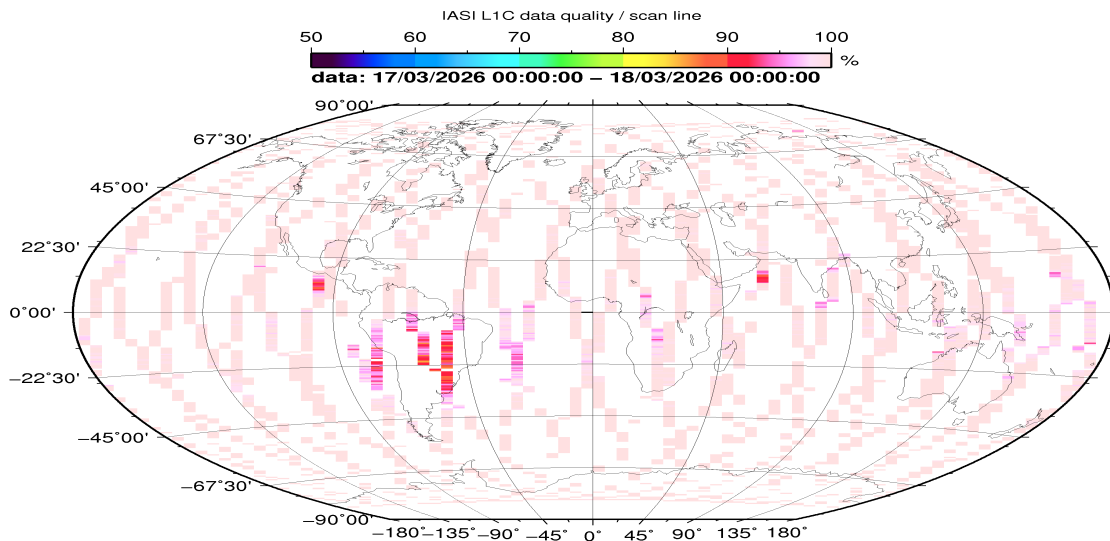

2026 Mar 18 07:40:30

Figure 1: L1C data quality

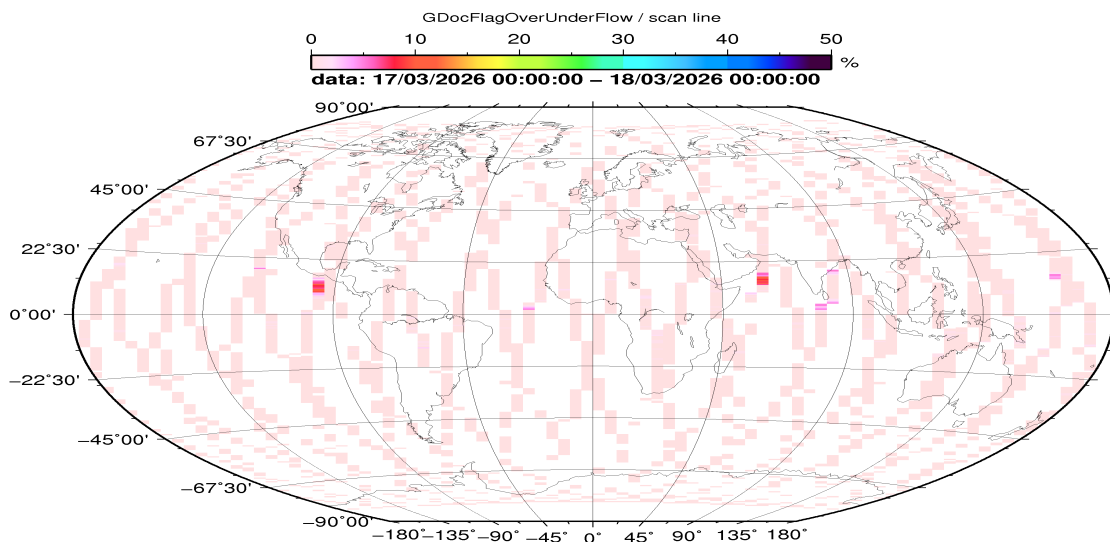

2026 Mar 18 07:40:34

Figure 2: Flag of Over and Under Flows

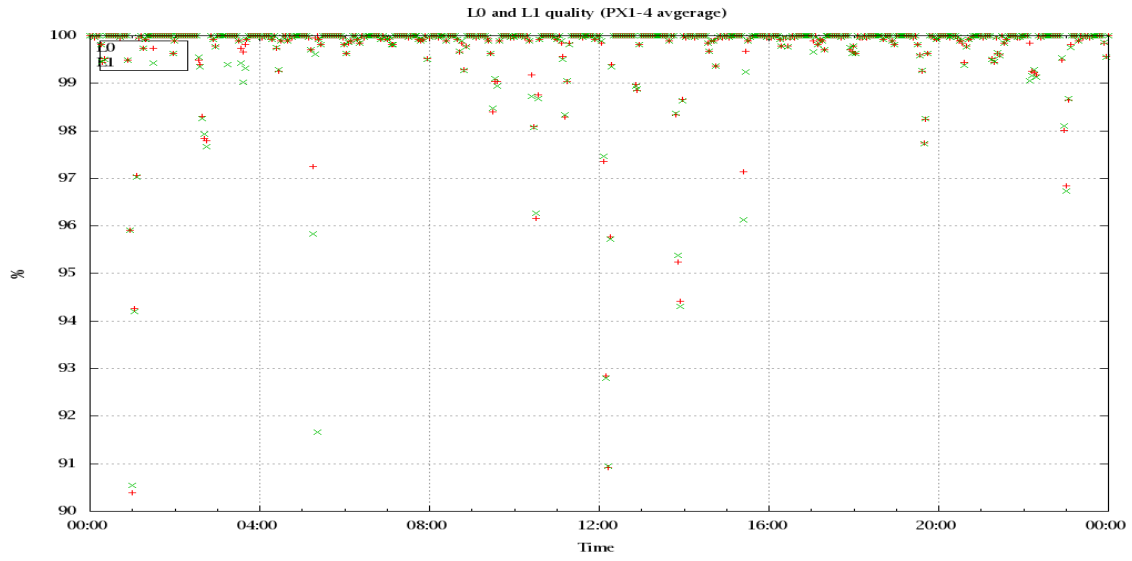


Figure 3: Level 0 and 1C overall quality

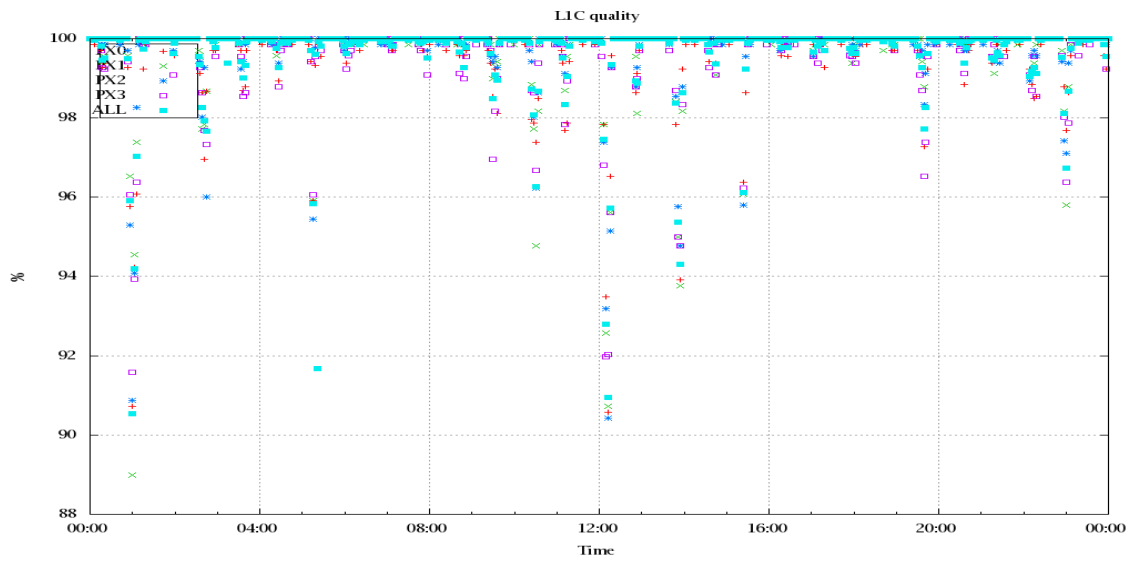


Figure 4: Level 1C quality

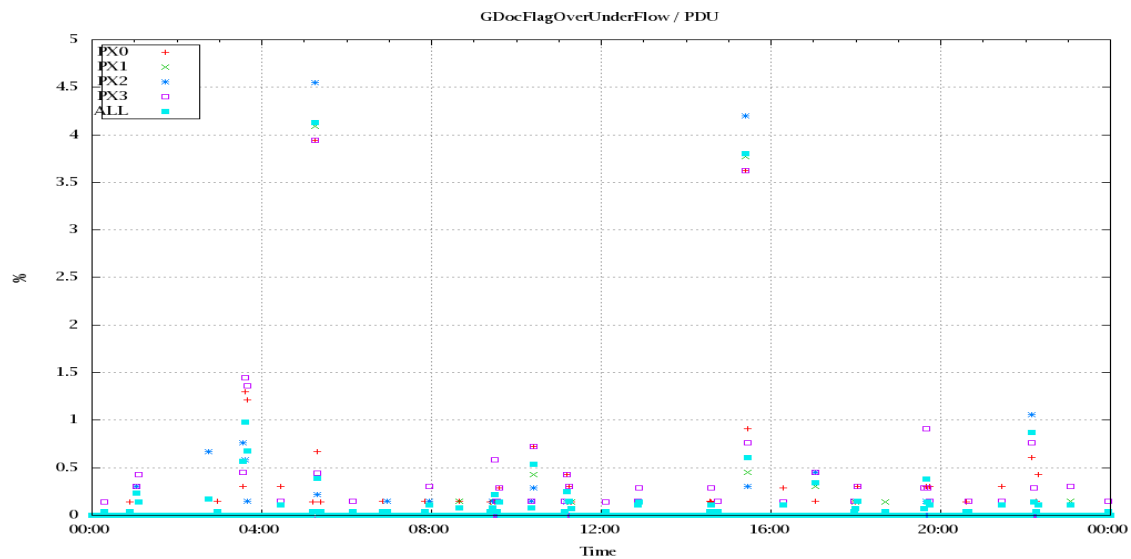


Figure 5: Timeseries of flag of Over and Under Flows

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class).

A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T, water vapor and Ozone. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used.

Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 28 to 34, the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixels and scan positions 10 to 20) and the average bias OBS-CAL (over all pixels and scan positions 10 to 20) of the last 30 days.

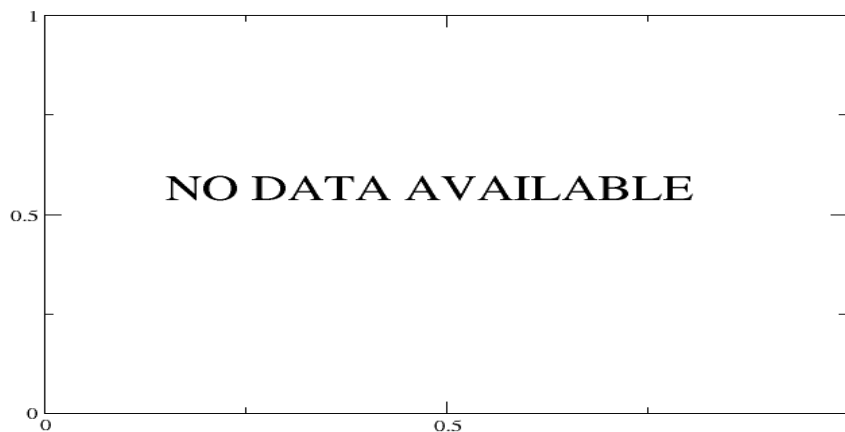


Figure 6: Average Radiance differences: OBS-CAL

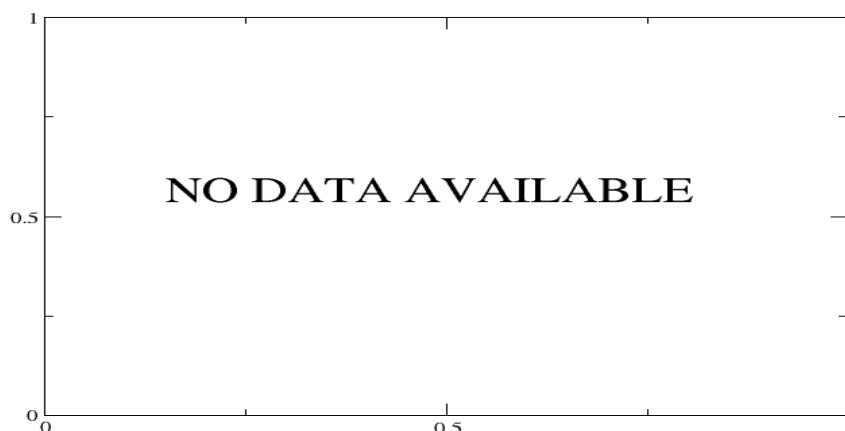


Figure 7: Standard Deviation of Radiance differences

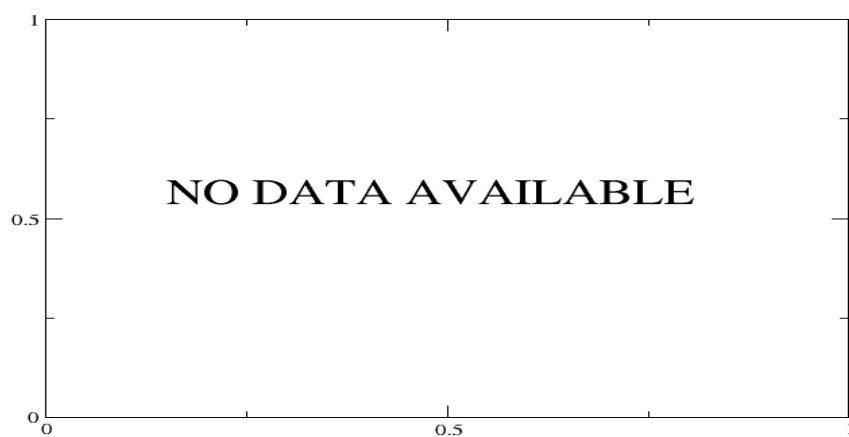


Figure 8: Average Radiance differences: OBS-CAL

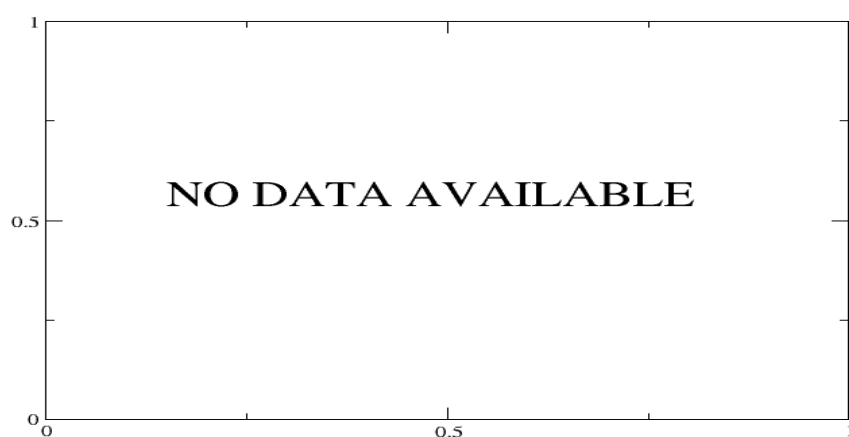


Figure 9: Standard Deviation of Radiance differences



Figure 10: Radiance Anomaly in BT: All Channels

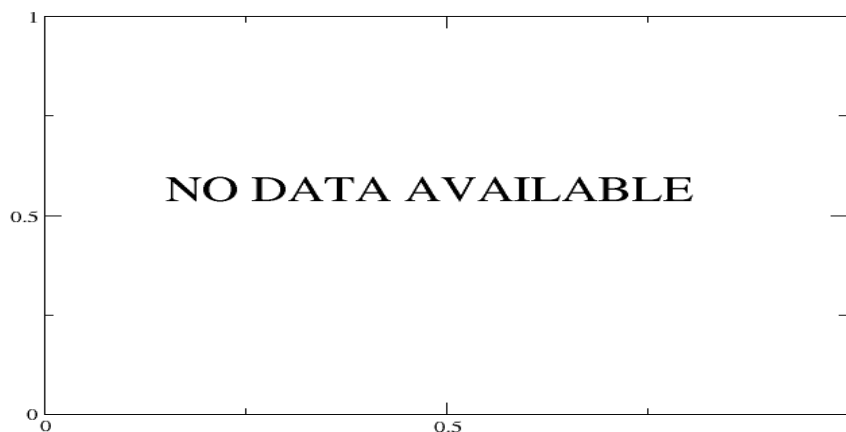


Figure 11: Radiance Anomaly in BT: IASI Band 1

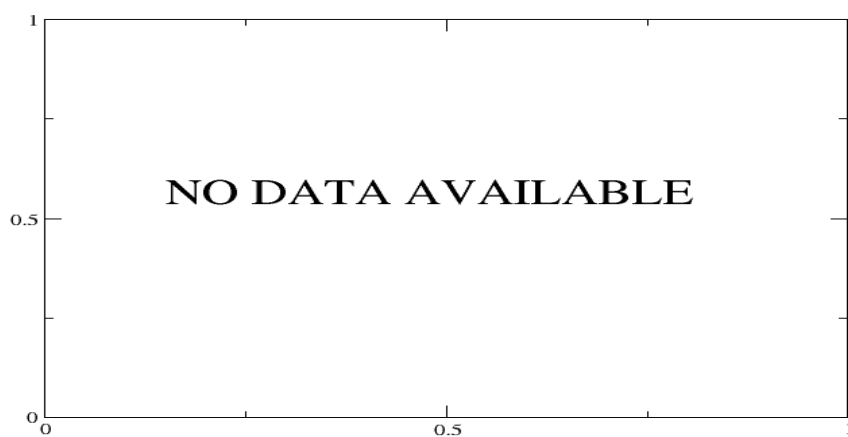


Figure 12: Radiance Anomaly in BT: IASI Band 2

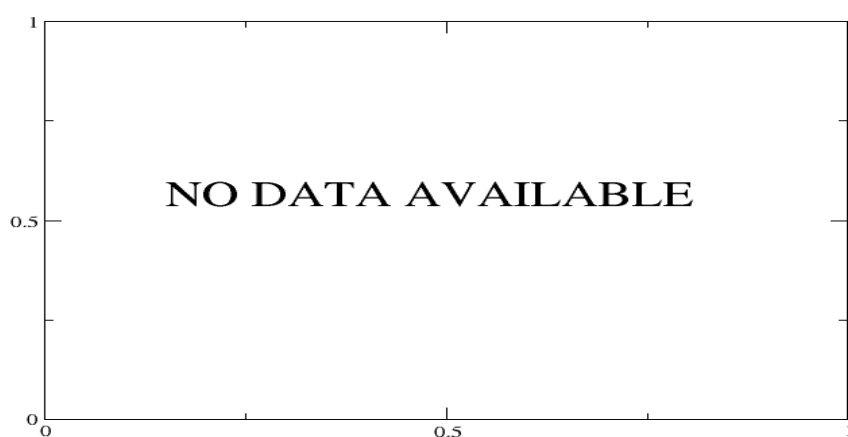


Figure 13: Radiance Anomaly in BT: IASI Band 3

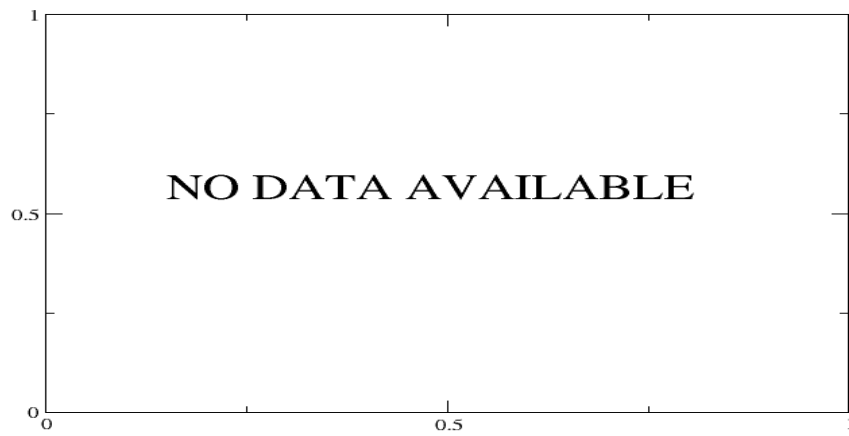


Figure 14: Radiance Anomaly in BT: CO2 14



Figure 15: Radiance Anomaly in BT: CO2 4.3

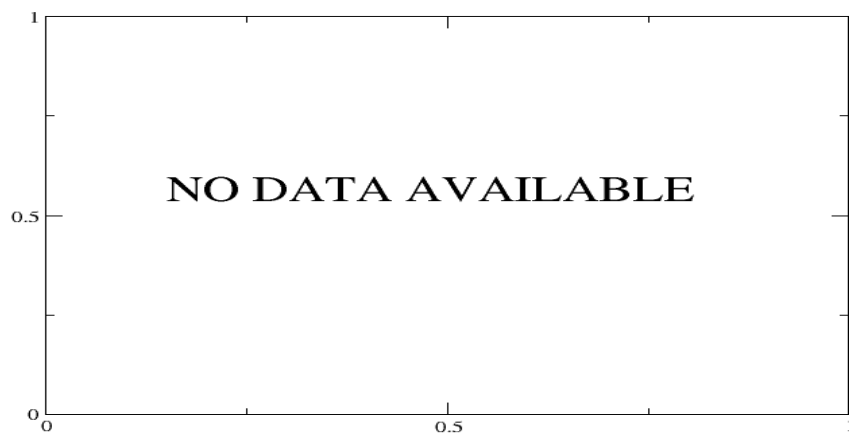


Figure 16: Radiance Anomaly in BT: O3

6 IASI-HIRS radiance comparison Channel 1-19

The radiance comparison of IASI and HIRS/4 on-board Metop is performed on all pixels with distances smaller than 3 km between IASI and HIRS. All sky conditions are covered. The radiance differences IASI - HIRS are given in brightness temperatures at 280K reference NeDT. All conditions (clear, cloudy, day and night) are given in red in the following figures. The clear sky conditions at night are given in green and the clear sky cases during daylight are displayed in blue.

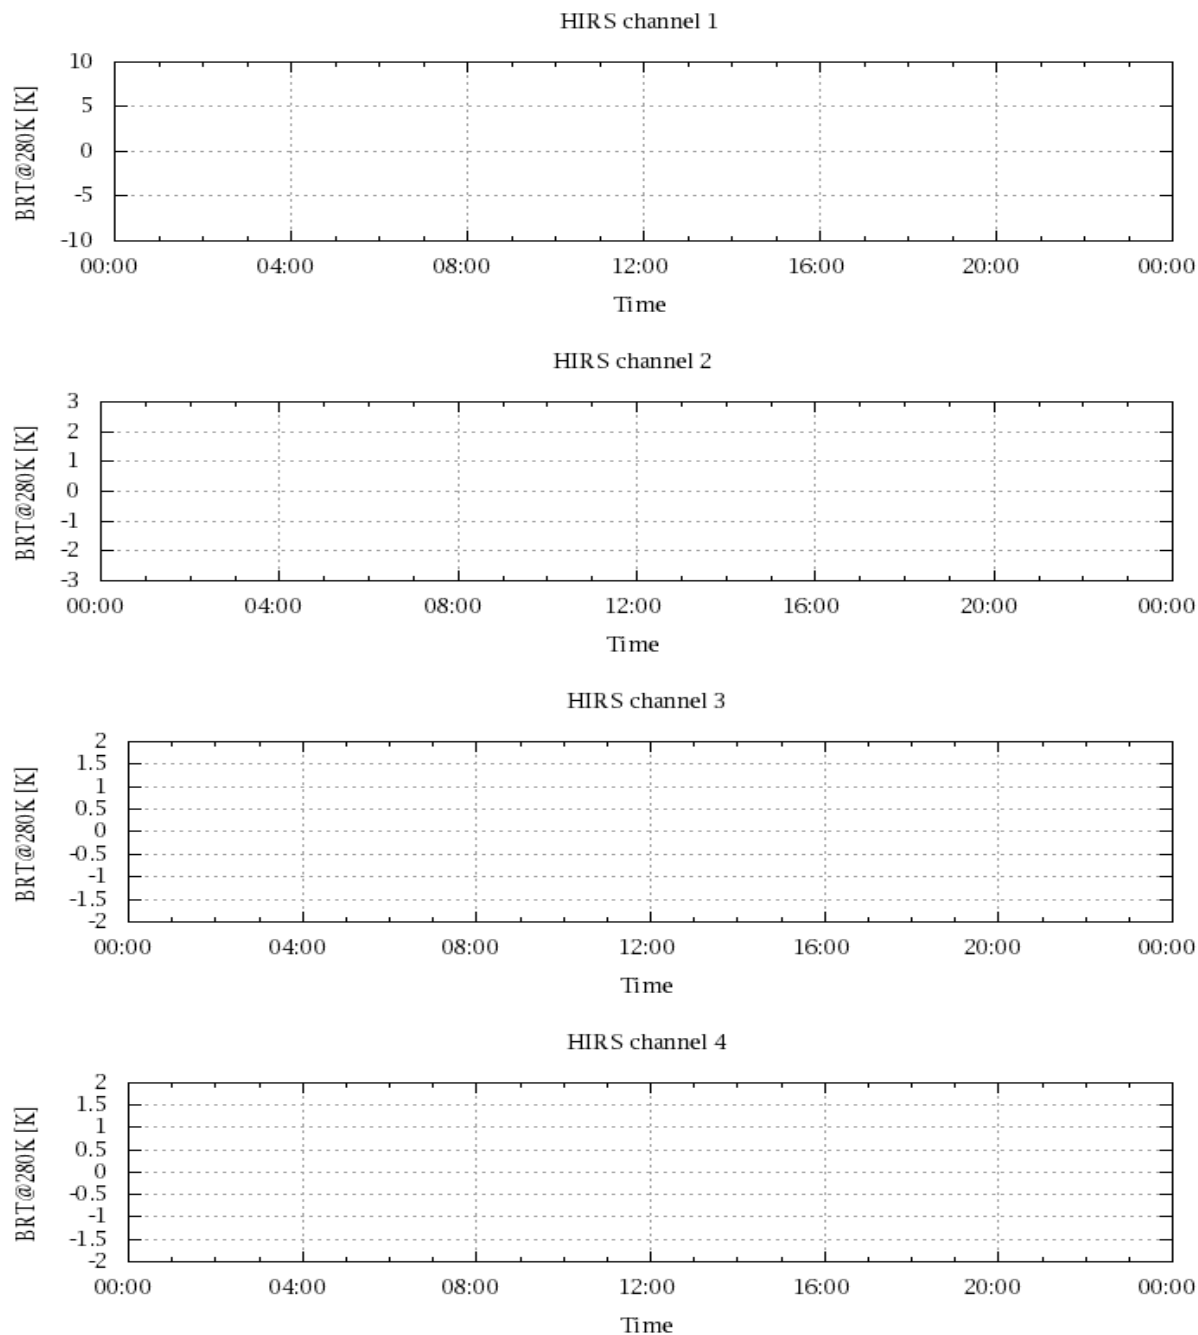


Figure 17: Radiance Differences in BT

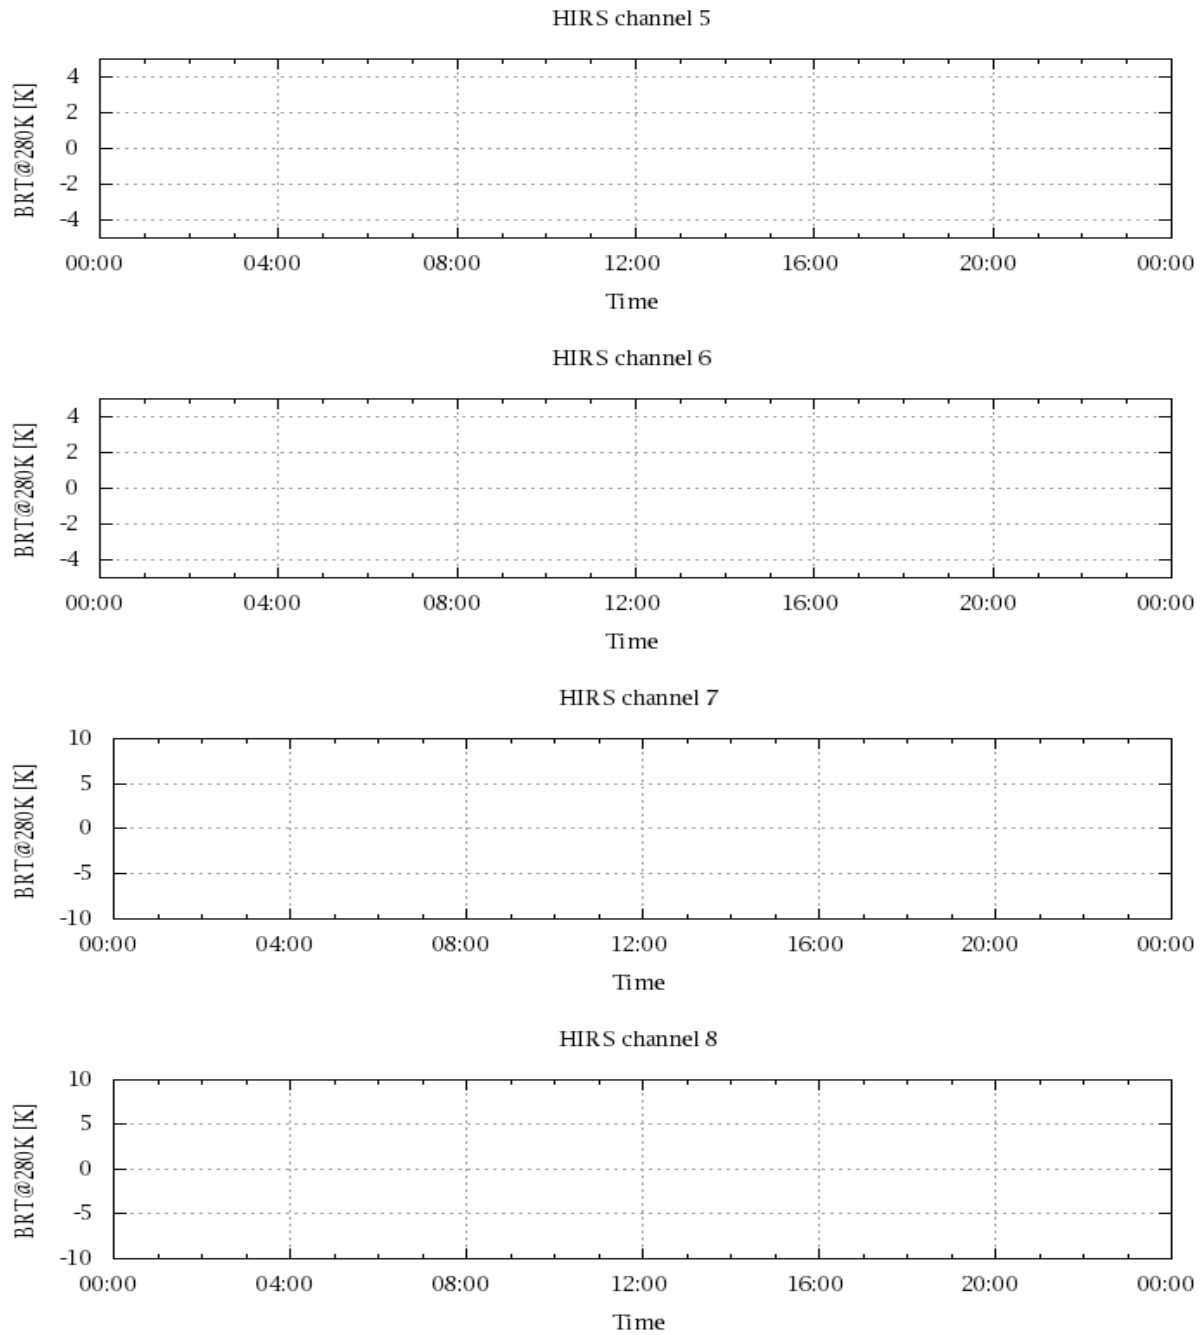


Figure 18: Radiance Differences in BT

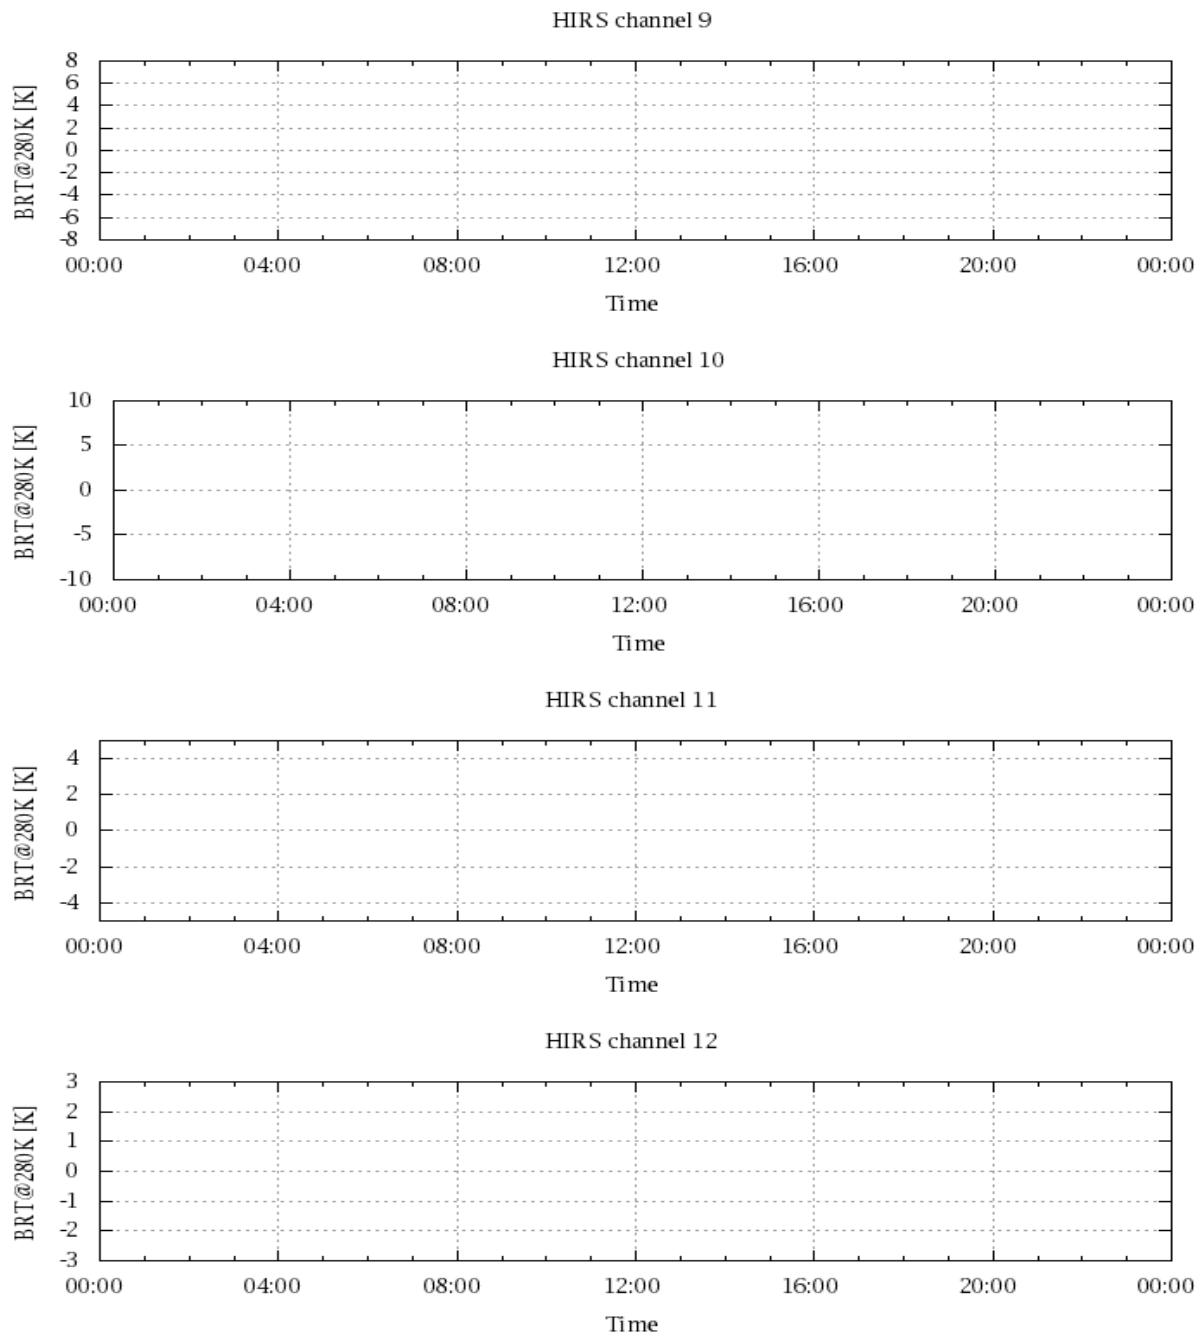


Figure 19: Radiance Differences in BT

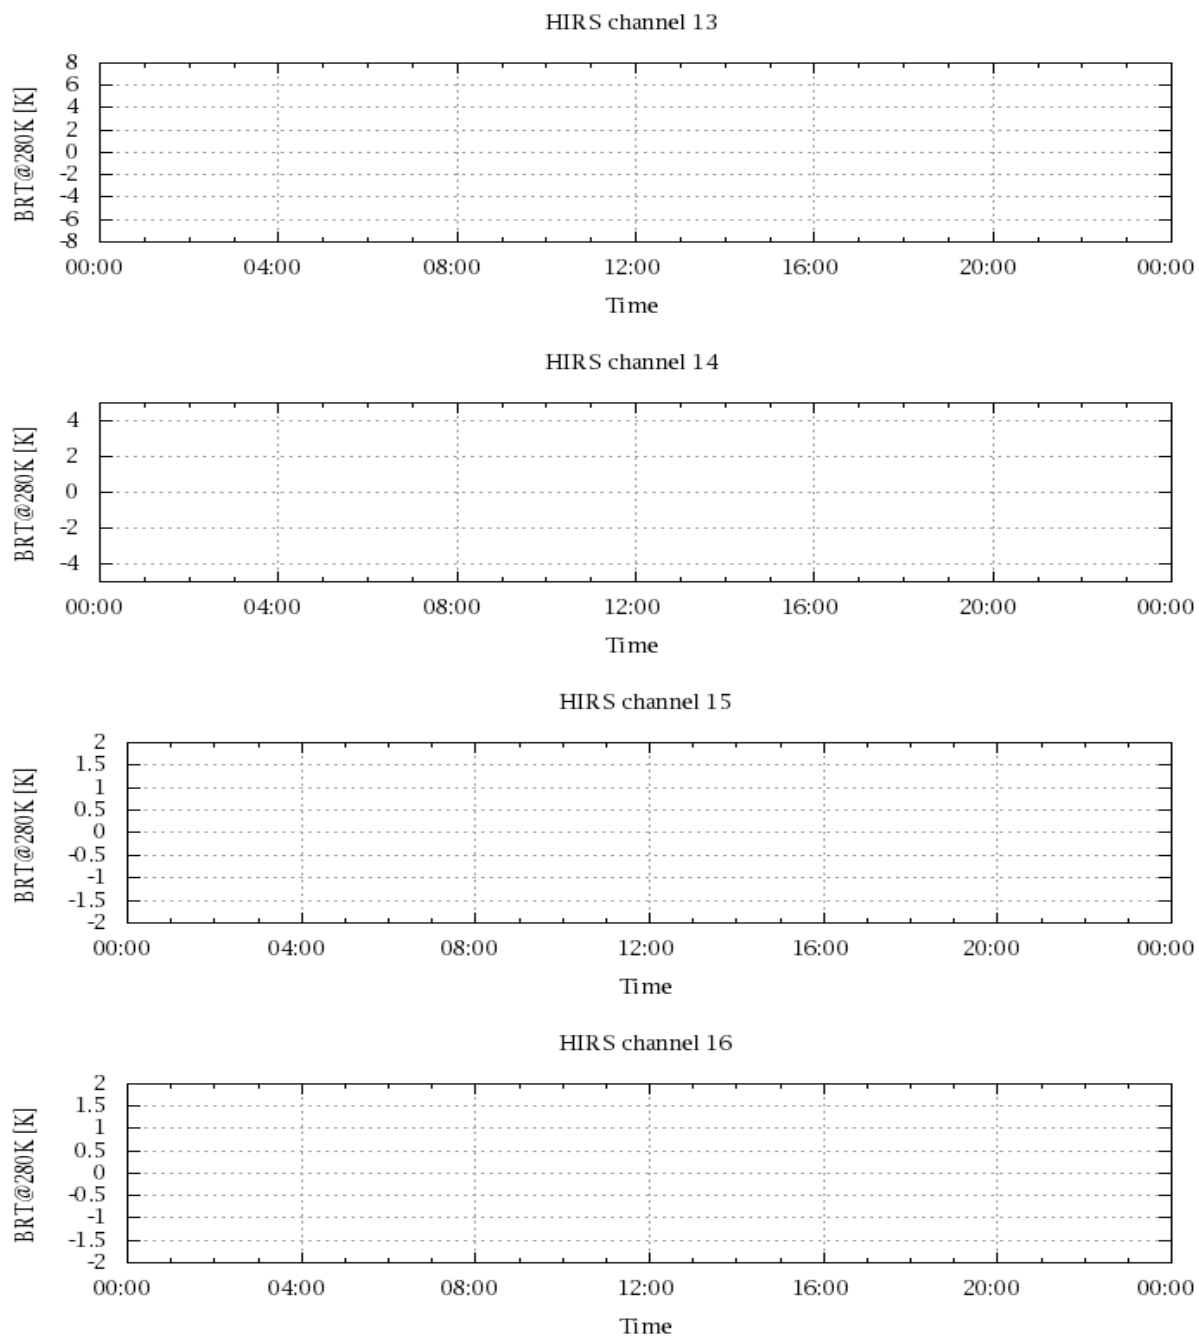


Figure 20: Radiance Differences in BT

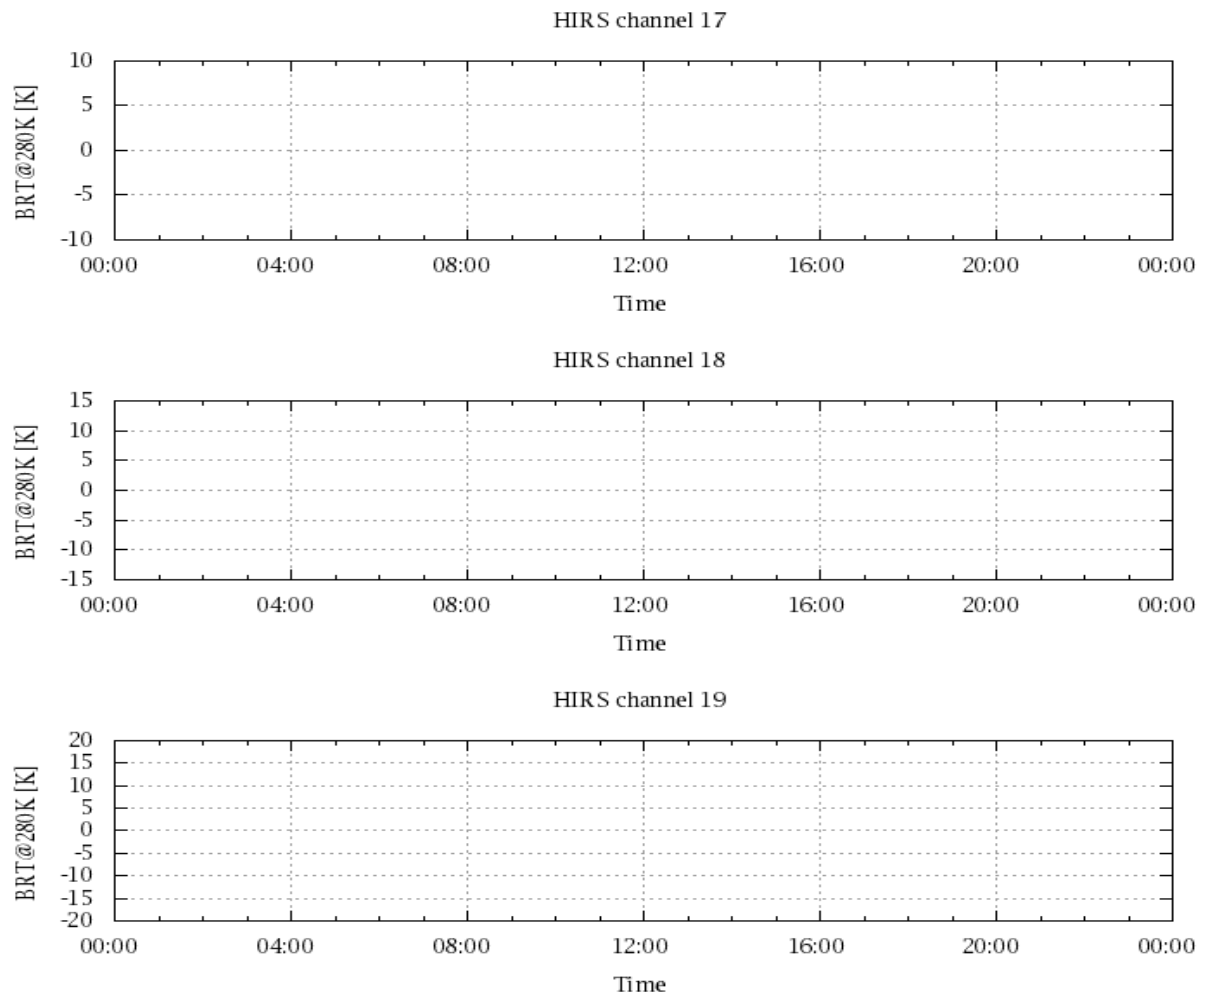


Figure 21: Radinace Differences in BT