

IASI L0 and L1 Daily Monitoring Report **Metop-C**

IASI monitoring team

02/04/2026 00:00:00 - 03/04/2026 00:00:00

1 Introduction

This report provides summary monitoring plots and figures from IASI instrument on the Metop-C satellite retrieved from the IASI L0 and L1 ENG product (3 minutes data packet) for 02/04/2026 00:00:00 - 03/04/2026 00:00:00 .

The monitoring data are extracted on PDU basis.

2 Data quantity 02/04/2026 00:00:00 - 03/04/2026 00:00:00

Product Type	Number	Action
L0 HKTM PDUs	481	-
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSSGranule	481	-
L1 DPX PDUs (RM: IASI-HIRS)	0	e
L1 DPS Files (RM: OBS-CAL NWP based)	480	-

Table 1: Data quantity

APID	Seq from	Seq to	Time from	Time to
PX1 (130)	883	1022	20260402110836.780	20260402110914.401
PX2 (135)	883	885	20260402110836.780	20260402110838.725
PX2 (135)	885	1022	20260402110838.725	20260402110914.401
PX3 (140)	883	1022	20260402110836.780	20260402110914.401
PX4 (145)	884	1022	20260402110838.511	20260402110914.401
IMG (150)	4292	4295	20260402110836.780	20260402110837.862
IMG (150)	4295	4451	20260402110837.862	20260402110914.401
VER (160)	16381	0	20260402034636.847	20260402034644.847
VER (160)	2	16382	20260402034644.847	20260402034644.847
VER (160)	-1	3	20260402034644.847	20260402034652.847
VER (160)	16382	0	20260402110332.788	20260402110340.788
VER (160)	3	16383	20260402110340.788	20260402110340.788
VER (160)	-1	4	20260402110340.788	20260402110348.788
VER (160)	185	209	20260402110836.780	20260402110916.780
AUX (180)	13139	13145	20260402110829.214	20260402110917.214

Table 2: L0 data gaps

3 Instrument modes


Time	Transition from	Transition to
02/04/2026 00:00:08	-	Normal operation

Table 3: Instrument modes

4 L0 and L1 Data Quality


Flag	Value	Action
L0 IASI PDUs	481	-
L1 ENG PDUs	480	-
L1 ENG distinct GEPSGranule	481	-
GQisFlagQual set (PX1)	99.64 %	-
GQisFlagQual set (PX2)	99.69 %	-
GQisFlagQual set (PX3)	99.69 %	-
GQisFlagQual set (PX4)	99.61 %	-
GQisFlagQual set (all)	99.66 %	-

Table 4: Quality flags

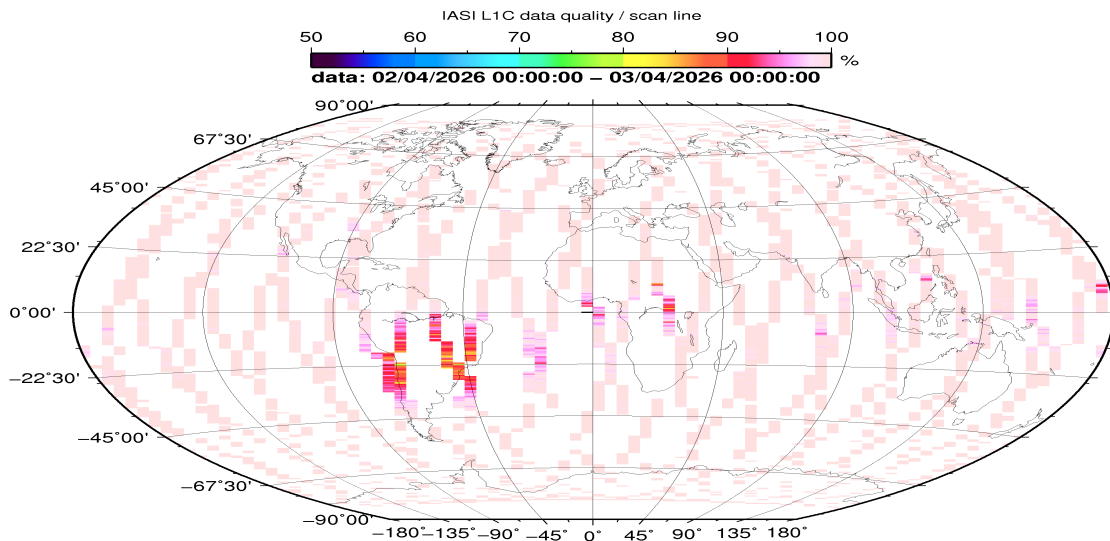

CMV 2026 Apr 03 07:49:27

Figure 1: L1C data quality

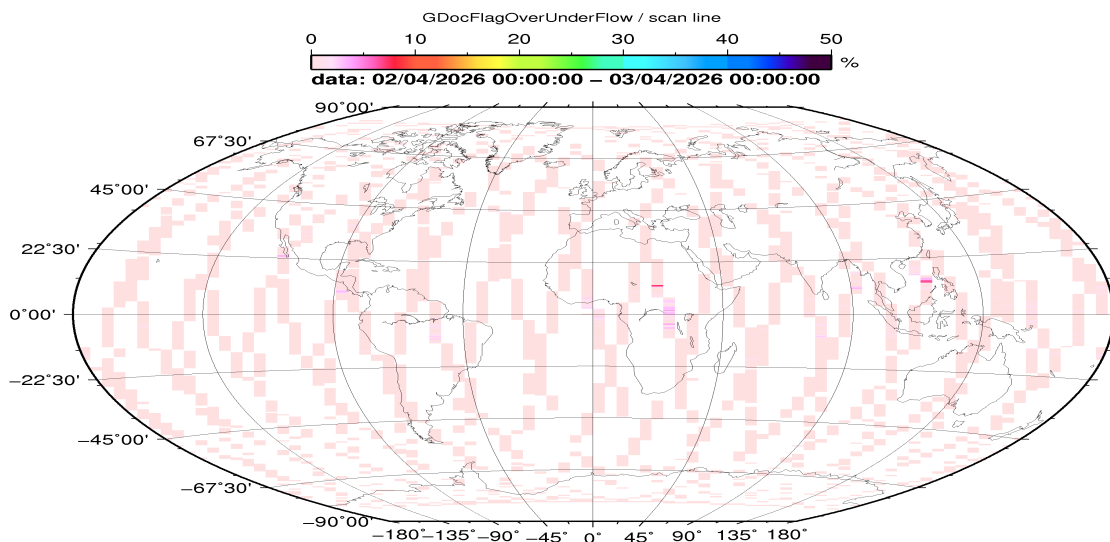

CMV 2026 Apr 03 07:49:31

Figure 2: Flag of Over and Under Flows

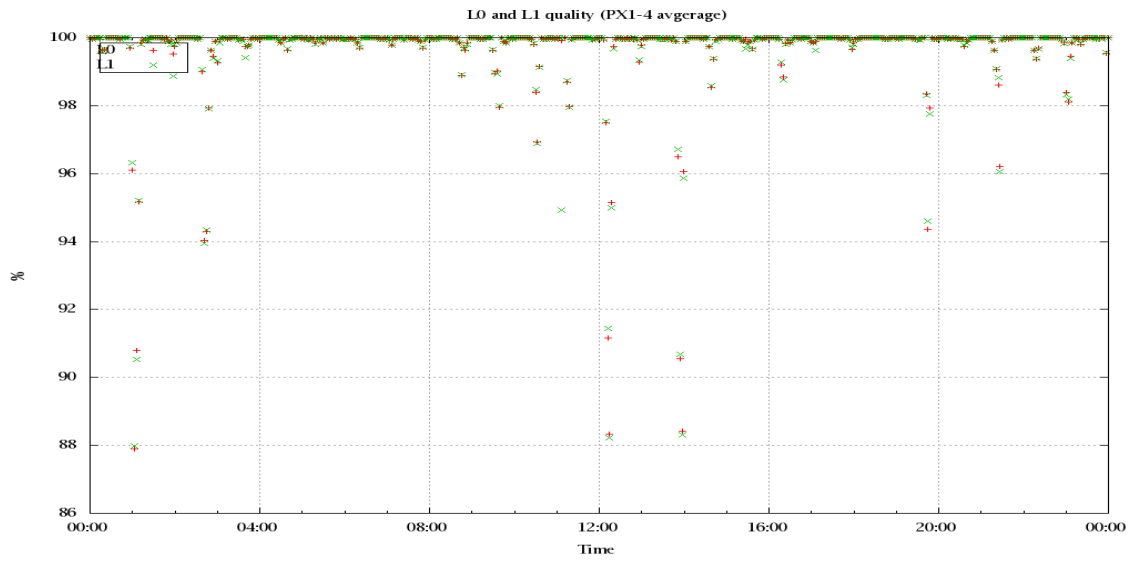


Figure 3: Level 0 and 1C overall quality

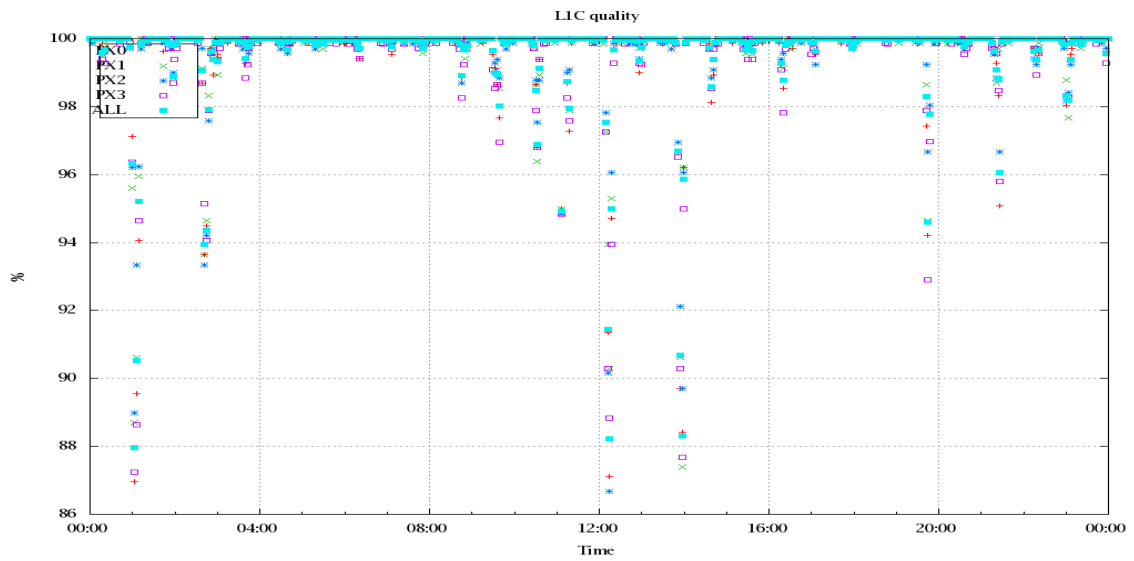


Figure 4: Level 1C quality

5 Radiance monitoring based on NWP

The radiance monitoring compares the IASI measurements (L1C-eps-products) obtained under clear sky situation over sea with modeled radiances. Cloud identification is based on cloud flag of co-located AVHRR L1B data in addition to information from the IASI L1C clustering analysis here only homogenous situations are taken into account (99.0 percent in first class).

A radiative transfer model (RTM) is feed with co-located ECMWF profiles of T, water vapor and Ozone. Between March 2007 and the 18th of May 2010 RTIASI in Version 4.0 is used. After that date the RTTOV model in V9.3 is used.

Information about the SST is obtained from the AVHRR L1B or taken from AVHRR scenes analysis (CGS only). In the following figures 28 to 34, the so-called radiance anomaly is shown. The radiance anomaly is defined as the difference between the quarter daily radiance average OBS-CAL (over all pixels and scan positions 10 to 20) and the average bias OBS-CAL (over all pixels and scan positions 10 to 20) of the last 30 days.

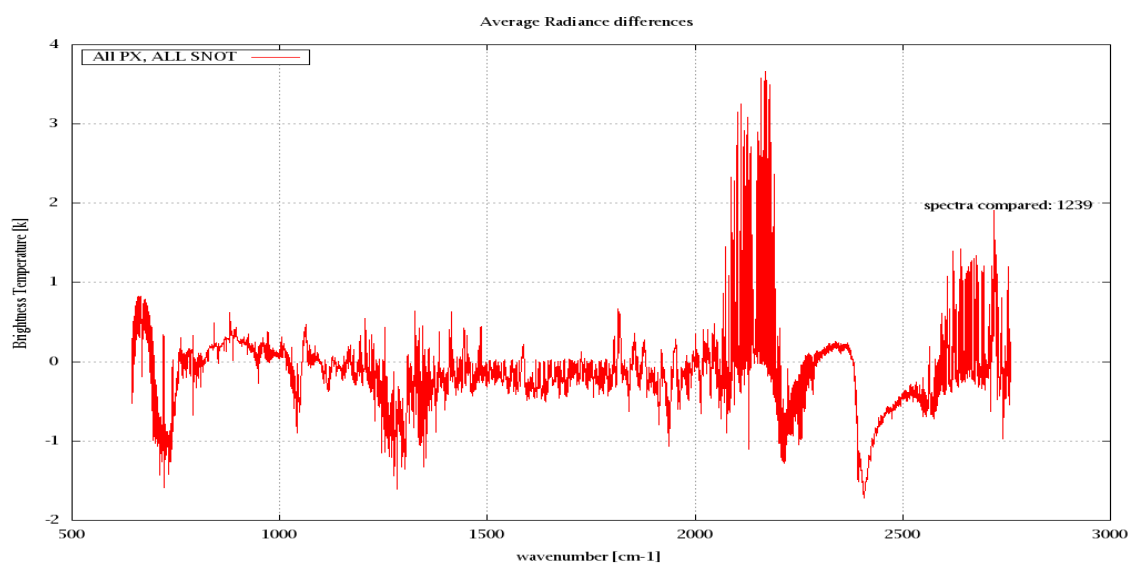


Figure 6: Average Radiance differences: OBS-CAL

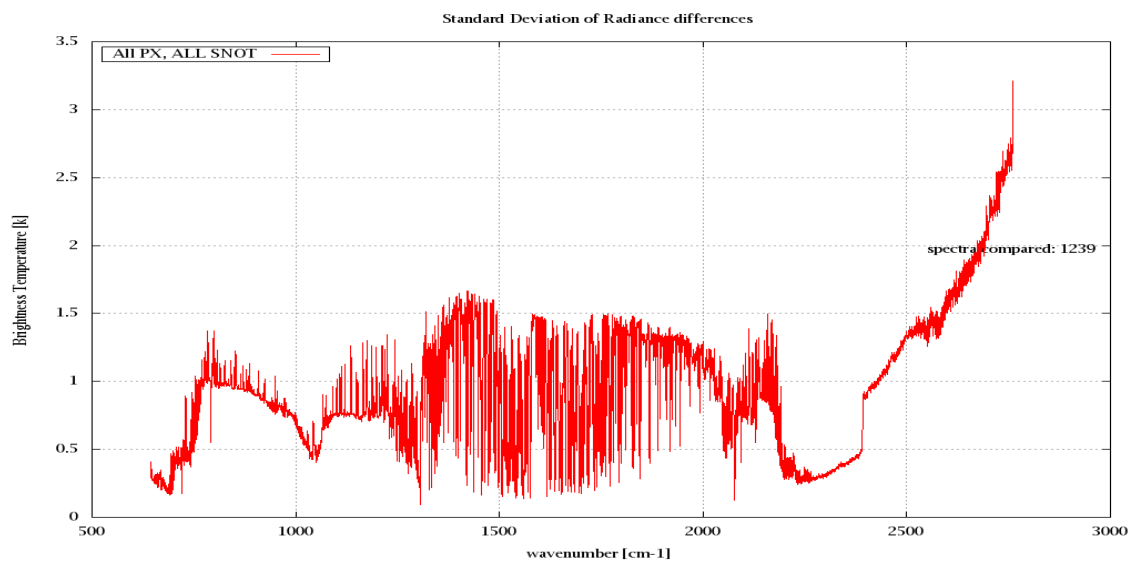


Figure 7: Standard Deviation of Radiance differences

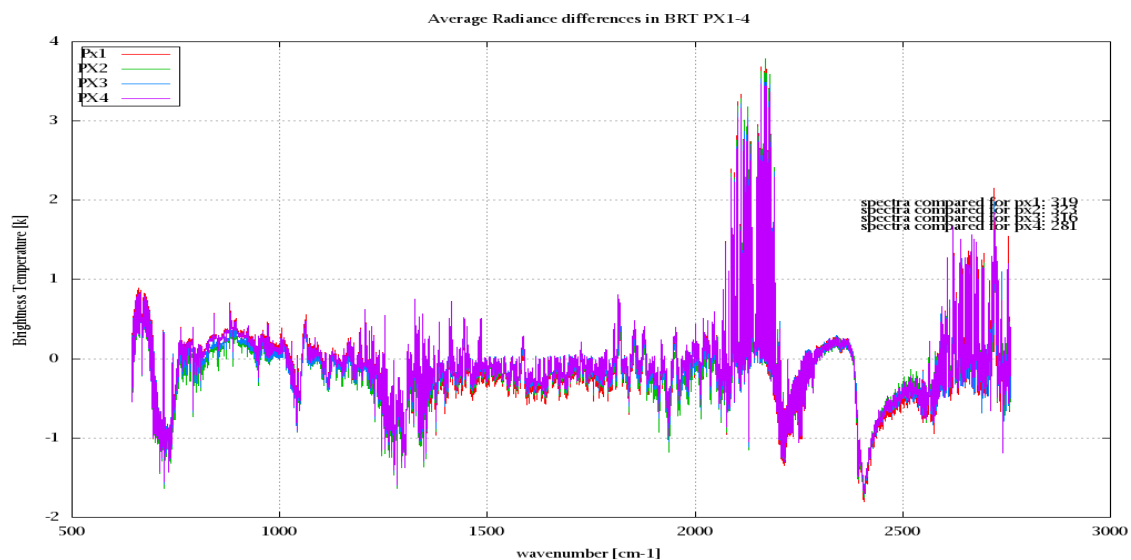


Figure 8: Average Radiance differences: OBS-CAL

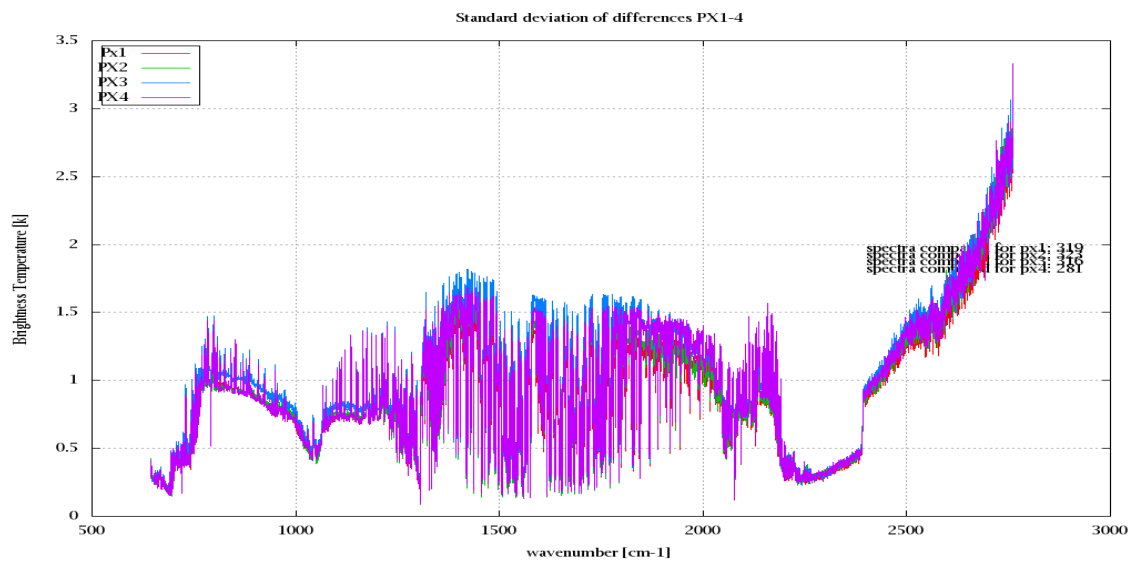


Figure 9: Standard Deviation of Radiance differences

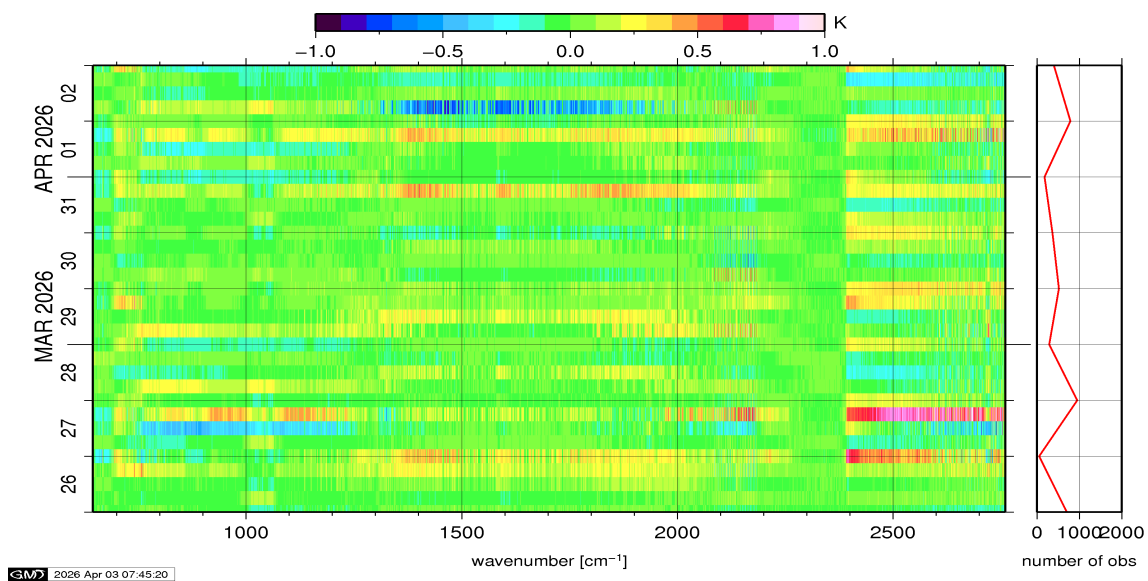


Figure 10: Radiance Anomaly in BT: All Channels

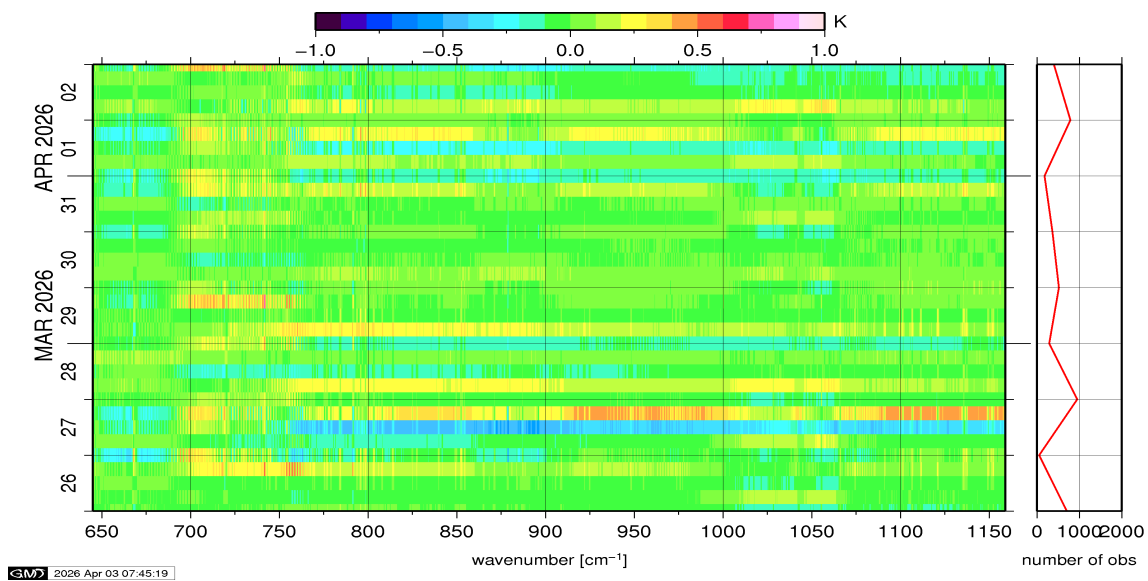


Figure 11: Radiance Anomaly in BT: IASI Band 1

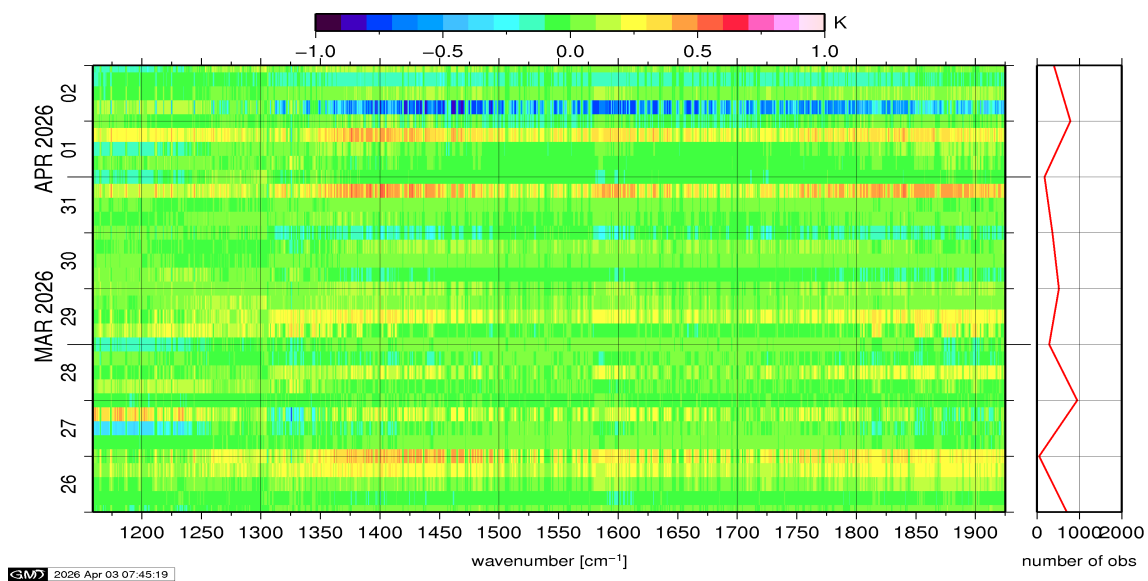


Figure 12: Radiance Anomaly in BT: IASI Band 2

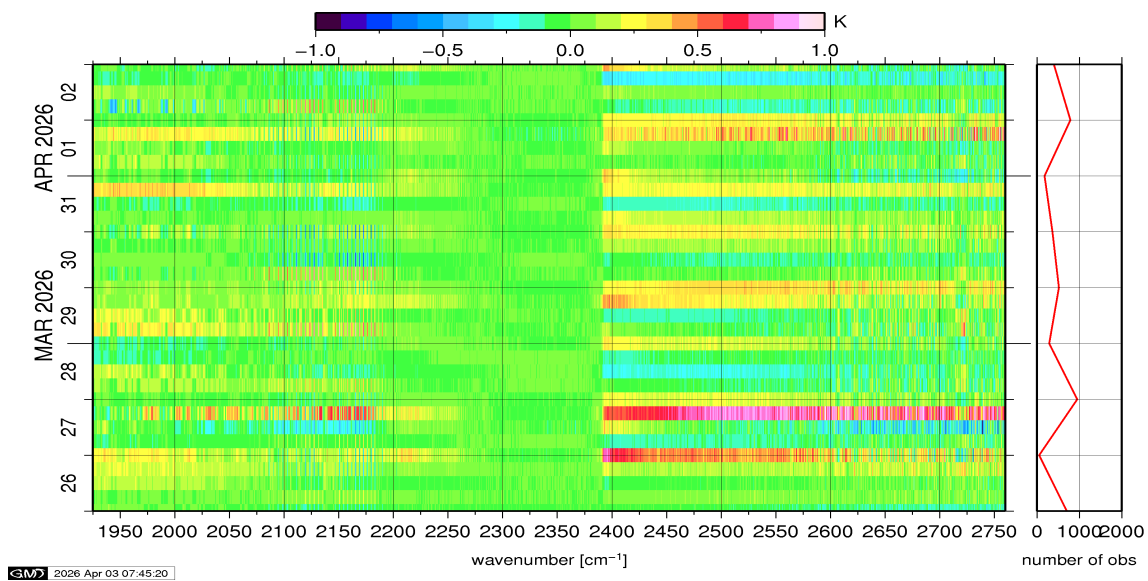


Figure 13: Radiance Anomaly in BT: IASI Band 3

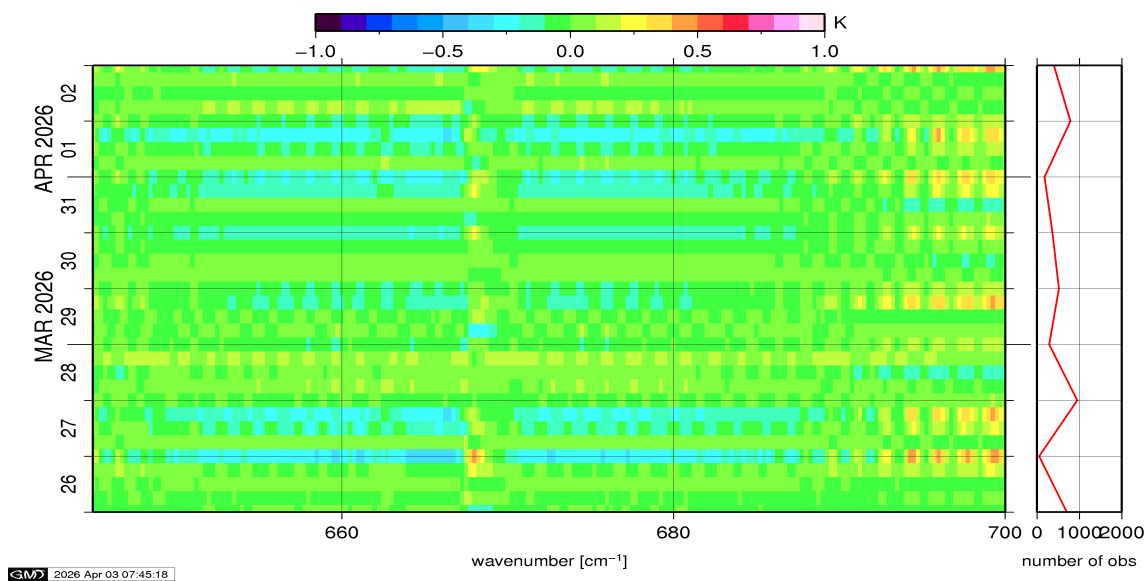


Figure 14: Radiance Anomaly in BT: CO2 14

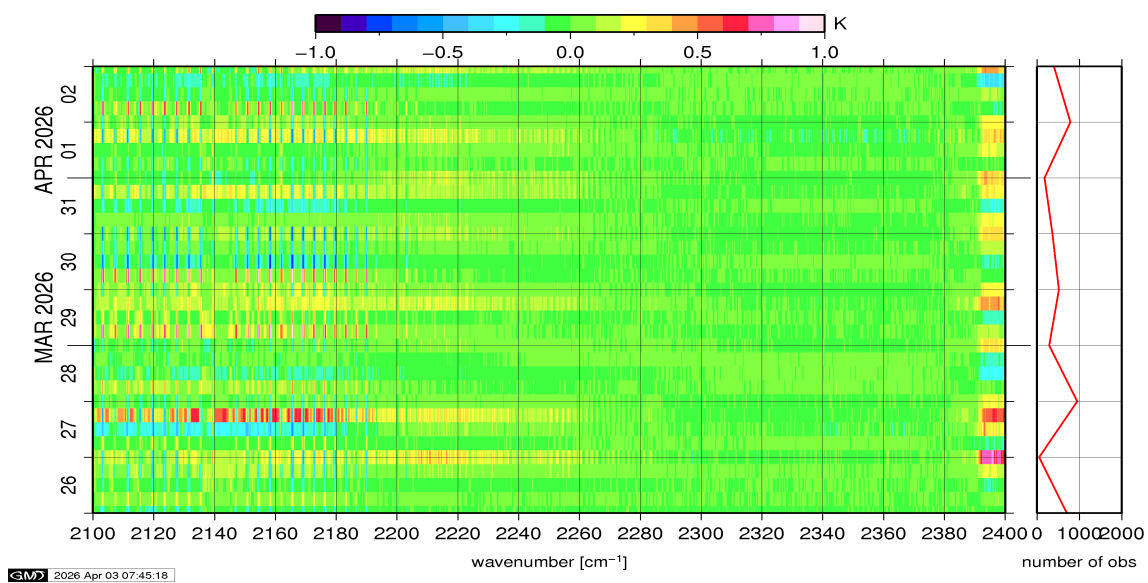


Figure 15: Radiance Anomaly in BT: CO2 4.3

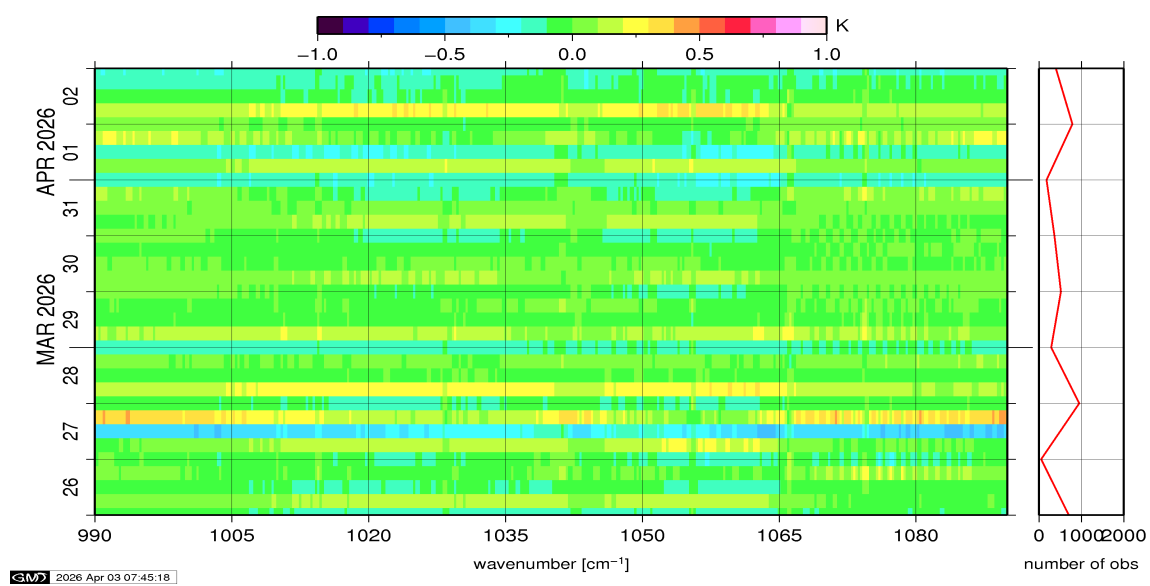


Figure 16: Radiance Anomaly in BT: O3